



Red Electroluminescent (EL) Tape Strip - 100cm w/two connectors

PRODUCT ID: 445

IN STOCK

1

ADD TO CART

1-9

10-99

100+

ADD TO WISHLIST

DESCRIPTION

TECHNICAL DETAILS

DESCRIPTION

EL tape is the big sister to EL wire - it has the same glow effect but with a flat, wide shape instead of a round shape. The glowing part of the tape is 1 cm wide (the plastic coating is about 1.5cm wide). The other side has an adhesive on it so you can stick the tape onto something. Its covered in what seems to be PVC, the tape is thus weather-proof - but note that the connectors are NOT waterproof, just a bit of heatshrink. This isn't something we would suggest leaving outdoors for extended periods.


Because EL tape has more surface area than wire, it requires a more powerful inverter for the same length. This tape is about 4 times more capacitive (per length) than our high-brightness EL wire and 8 times more capacitive than 'standard' EL wire. For that reason, we are shipping the EL tape in **100cm lengths with two EL connectors soldered on**, one on each end. You can cut it into two pieces of any length and use both halves!

Note that the maximum amount for [the 2xAA pocket inverter we carry](#) is 60cm so don't try to run the full strip off of one inverter - it will look dim and isn't nice to the inverter - cut it in half first! Plug it in and it will light up nicely! A 50cm strip draws about 200mA from the 2xAA batteries in the pocket inverter (so 2000mAh batteries will last ~10 hours if on 'constant' mode). You can also use [our 4xAAA inverter which is strong enough to power a full meter at once](#) - plug in only one end of the tape to the inverter or cut it in half and plug both halves in.

Please note! EL tape, EL wire and EL panel are made with different processes and so the

Downloaded from [Arrow.com](#) between the two: red tape, red wire and red

panels will not necessarily match!

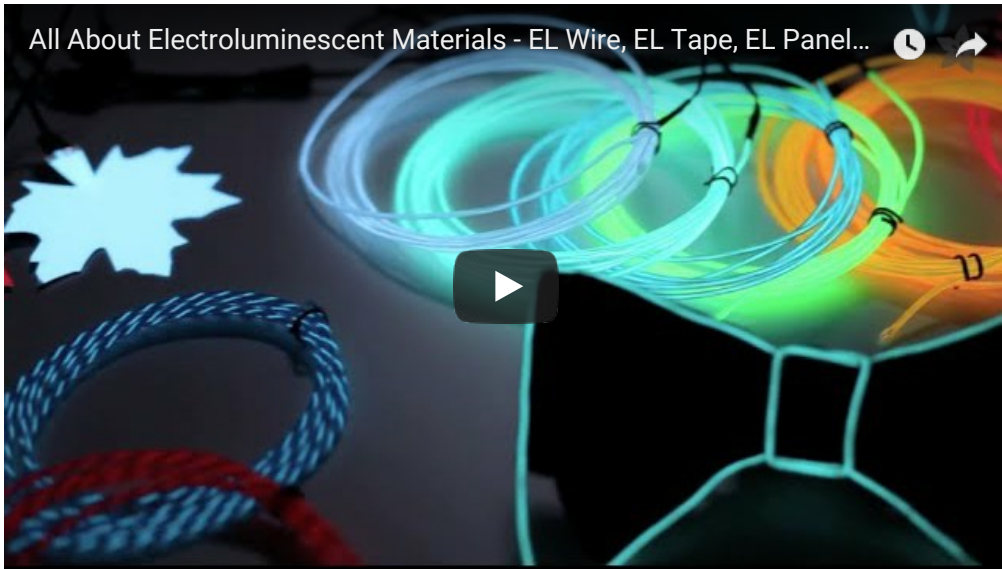

TECHNICAL DETAILS

- Size: 100 cm x 1.5 cm about 1mm thick
- Panel lifetime: >25000 hours
- Operating voltage: 60-250VAC
- Operating Frequency: 50-5000HZ
- Current Draw: 0.14mA/cm² (max) @ 110V / 400Hz
- Initial Brightness: 32 cd/m²
- Operating Temperature: -50 C / 65 C
- ~10 nF per meter

It is very difficult to reattach connectors to EL tape once its been cut, but here is a tutorial that shows how it can be done




MAY WE ALSO SUGGEST...



Aqua Electroluminescent



Green Electroluminescent



Blue Electroluminescent




White Electroluminescent




EL wire 2xAA pocket




Electroluminescent (EL)




Flexible Silicone Neon-Like




Flexible Silicone Neon-Like



Flexible Silicone Neon-Like



Flexible Silicone Neon-Like



Flexible Silicone Neon-Like



Flexible Silicone Neon-Like

DISTRIBUTORS [EXPAND TO SEE DISTRIBUTORS](#)

- [CONTACT](#)
- [SUPPORT](#)
- [DISTRIBUTORS](#)
- [EDUCATORS](#)
- [JOBS](#)
- [FAQ](#)
- [SHIPPING & RETURNS](#)
- [TERMS OF SERVICE](#)
- [PRIVACY & LEGAL](#)
- [ABOUT US](#)

"I am one of the people who love the why of things" - Catherine the Great

ENGINEERED IN NYC Adafruit®



4.9 ★★★★★
 Google
 Customer Reviews