

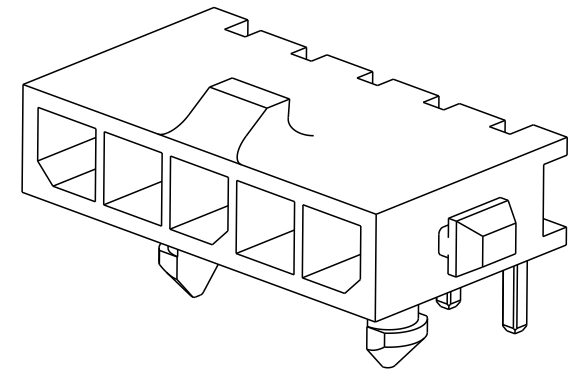


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A3	REVISED PER ECR-16-011494	30MAY2017	NK	CX
	A4	ECO-19-006934	10MAY2019	AP	WLS
	B	REVISED PER ECN-20-100924	15DEC2020	WLS	VS

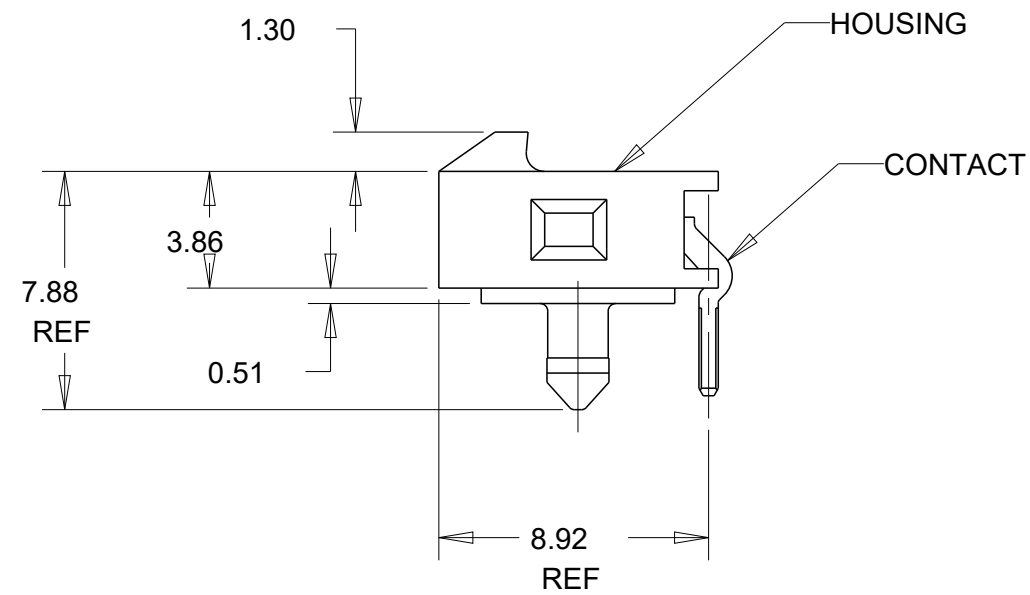

- POSITION).

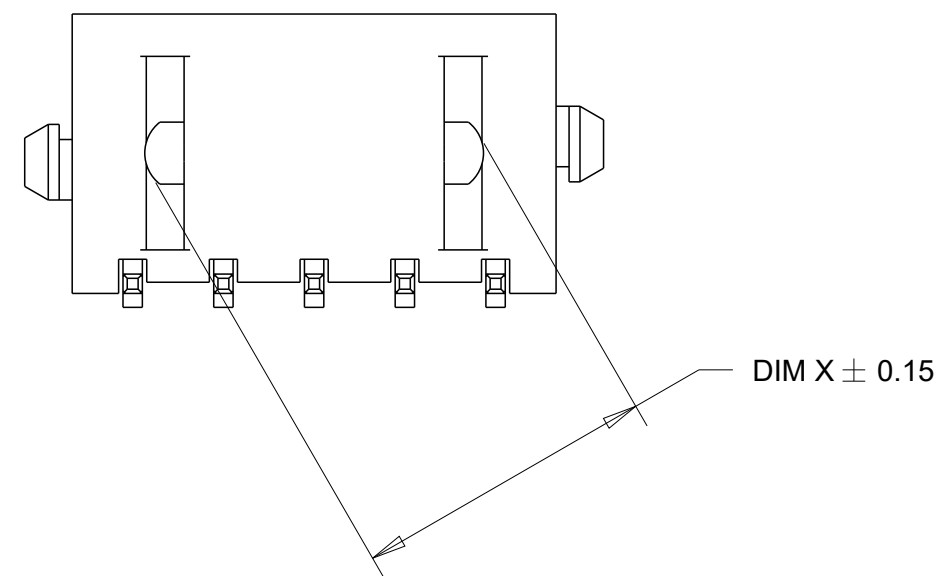

32.20	33.00	28.70	33.00	40.14	12	3-1445098-2
29.20	30.00	25.70	30.00	37.14	11	3-1445098-1
26.20	27.00	22.70	27.00	34.14	10	3-1445098-0
23.20	24.00	19.70	24.00	31.14	9	2-1445098-9
20.20	21.00	16.70	21.00	28.14	8	2-1445098-8
17.20	18.00	13.70	18.00	25.14	7	2-1445098-7
14.20	15.00	10.70	15.00	22.14	6	2-1445098-6
11.20	12.00	7.70	12.00	19.14	5	2-1445098-5
8.00	9.00	4.70	9.00	16.14	4	2-1445098-4
3.30	-	-	6.00	13.14	3	2-1445098-3
3.30	-	-	3.00	10.14	2	2-1445098-2
DIM X	DIM Z	DIM V	DIM T	DIM W	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.ROOT 09OCT2000		TE Connectivity			
		CHK K. WHITAKER 17-APR-2001					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE THRU HOLE HEADER ASSY, 0.76 MIC GOLD CONTACTS, W/PLASTIC HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK		TM	
		APVD C. JONES 17-APR-2001					
		PRODUCT SPEC 108-1836					
		APPLICATION SPEC 114-13000					
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		-		A2	00779	C=1445098	-
FINISH		CUSTOMER DRAWING		SCALE	SHEET	REV	
				4:1	1 of 2	B	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-


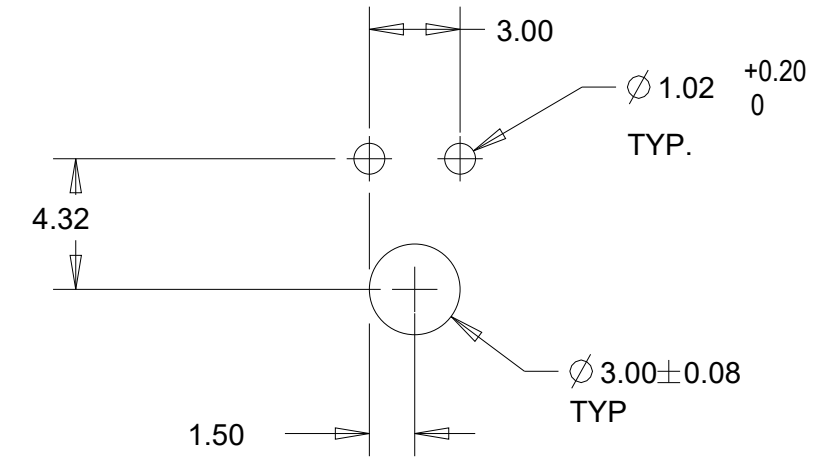






Diagram showing the elevation view of a bridge structure. The structure includes a pier and an abutment. Key dimensions and features are labeled:

- Abutment (Left):** A triangular structure with a height of 4.32. A small triangle with the number 2 is located above it.
- Pier (Center):** A circular structure with a diameter of $\varnothing 3.00 \pm 0.08$. It is supported by a foundation with a width of 6.00.
- Abutment (Right):** A triangular structure with a height of 3.00. It is supported by a foundation with a width of 6.00.
- Dimensions:**
 - Horizontal distance between the center of the pier and the center of the right abutment: 3.00.
 - Horizontal distance between the center of the pier and the center of the left abutment: 3.00.
 - Horizontal distance between the center of the pier and the center of the right abutment: 6.00.
 - Horizontal distance between the center of the pier and the center of the left abutment: 6.00.
- Other Labels:**
 - $\varnothing 1.02$ TYP: A typical dimension for the pier.
 - $+0.20$ 0: A vertical dimension for the pier.

2

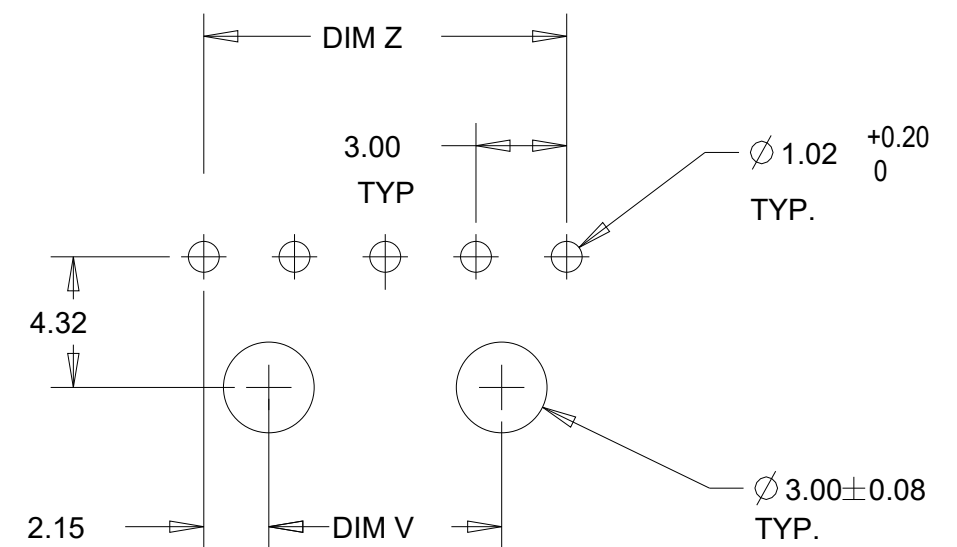

2

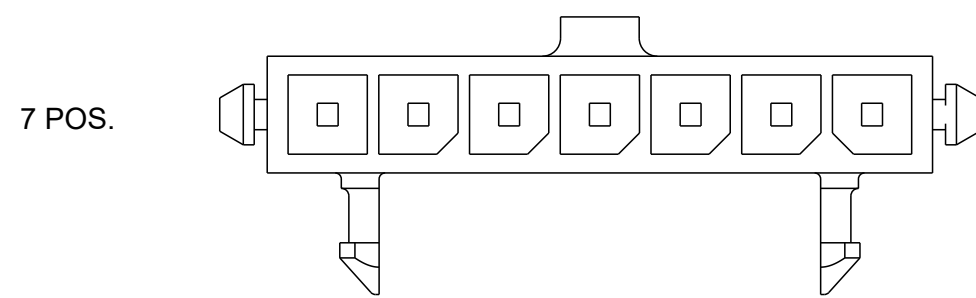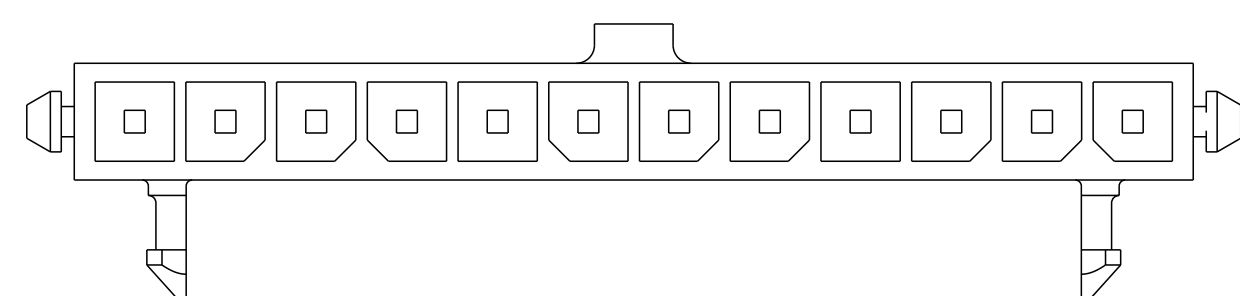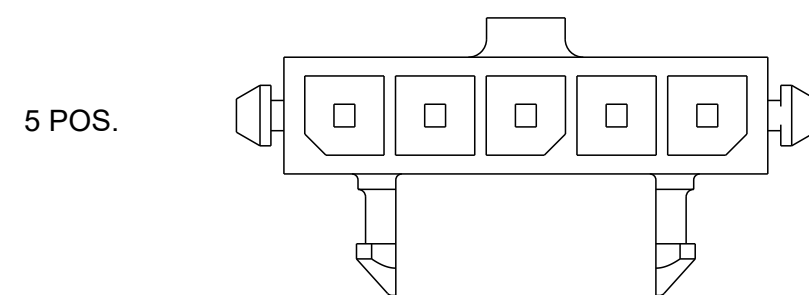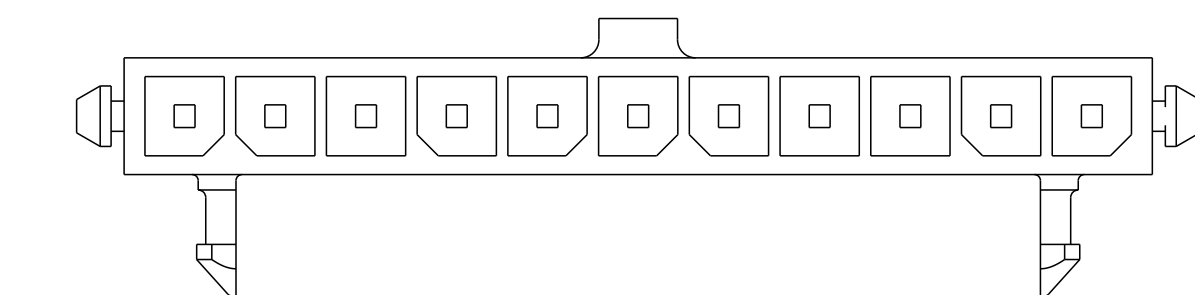

12 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 09OCT2000		TE Connectivity			
		CHK J.ROOT K. WHITAKER APVD 17-APR-2001 C. JONES					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±.1 2 PLC ±.013 3 PLC ±.1 4 PLC ±.1 ANGLES ±1°		NAME RIGHT ANGLE THRU HOLE HEADER ASSY, 0.76 MIC GOLD CONTACTS, W/PLASTIC HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK			
		PRODUCT SPEC - APPLICATION SPEC -					
MATERIAL - - -		WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO  1445098	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 5:1	SHEET 2 of 2	REV B	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1445098-4](#)