


Industrial Gateway Communications Device

Solutions for interference-free data transmission over long distances

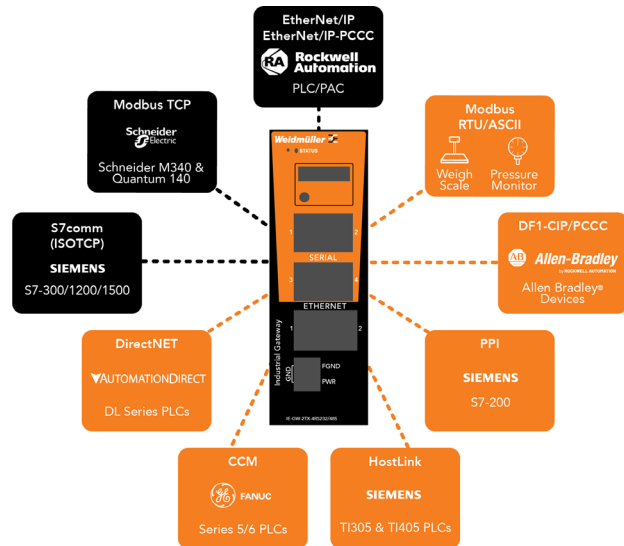

The perfect link for data communication

A single solution for connecting multiple devices, across multiple protocols. In systems where the installed base includes Industrial Ethernet and/or serial protocols, establishing communication across devices is critical and upgrading the equipment isn't always feasible. The Industrial Gateway is the most cost-effective way to move data between multiple PLCs and slave (server) devices, each with a different protocol, saving you time, money and the headache of configuring multiple gateway devices.

Features and Benefits

- **Single Solution:** Multiple protocols, multiple communication ports, one box
- **Configurable:** Transfer data to and from any port, in any combination
- **Multiple serial ports:** Maximum device connectivity
- **Cost effective:** The functionality of multiple gateways for the price of one
- **Intuitive navigation:** Consistent configuration for any protocol conversions
- **No software to install:** Browser-based configuration
- **No PLC programming:** Transfer data without editing PLC code
- **Context-Sensitive help:** Fully searchable with images and step-by-step instructions only one click away



Weidmuller, Ltd
10 Spy Court
Markham, Ontario L3R 5H6
Telephone: (800) 268-4080
Facsimile: (877) 300-5635
Email: orders_can@weidmueller.com
Website: www.weidmuller.ca

Weidmuller, SA de CV
Blvd. Hermanos Serdán 698,
Col. San Rafael Oriente
Puebla, Puebla, Mexico C.P. 72029
Telephone: 01 222 2686267
Facsimile: 01 222 2686219
Email: clientes@weidmueller.com
Website: www.weidmuller.com.mx

Weidmuller, Inc
821 Southlake Blvd.
Richmond, Virginia 23236
Telephone: (800) 849-9343
Facsimile: (804) 379-2593
Email: customerservice@weidmuller.com
Website: www.weidmuller.com

2/22 | LIT1938



Technical Data



4 Ports



6 Ports



Ethernet Interface				
Protocols (Master only):		EtherNet/IP, EtherNet/IP-PCCC, ModbusTCP, S7comm		
Number of Ports:		2 ports		
Speed:		10/100 Mbps full-duplex		
Connector:		8-pin RJ45		
Serial Interface				
Protocols (Master only):		Modbus RTU, Modbus ASCII, DF1-CIP, DF1-PCCC, PPI, DirectNET, CCM, HostLink		
Number of Ports:		2-port or 4-port option		
Serial Standards:		RS-232/485		
Connectors		8-pin RJ45		
Compatible controllers				
Controllers:		Rockwell Automation ControlLogix, CompactLogix, MicroLogix, Micro800, SLC 500, PLC-5 Schneider M340 & Quantum 140 Siemens S7-200/300/1200/1500, SIMATIC TI305 & TI405 Automation Direct DL05, DL06, DL205, DL305, DL405 GE Series Five & Series Six		
Features/Configurable Parameters				
Tag Pairs:		100 tag pairs/map (max)		
Tag Maps:		50 (Max)		
Data Types: (Protocol dependent)		SINT, INT, REAL, BOOL, STRING, SHORT (SIGNED 16 BIT), USHORT (UNSIGNED 16 BIT), DINT (SIGNED 32 BIT), UDINT (UNSIGNED 32 BIT), ARRAY		
Formatting:		Byte-Swap, Word-swap, Straight copy		
Electrical/Environmental				
Input/Voltage:		12-24 VDC		
Max Baud Rate:		115.2 kbps		
Operating Temp:		0° to 55° C (32°F to 130°F)		
Certifications:		RoHS-compliant, UL, cUL, CE; Class I, Div 2		
Enclosure				
Dimensions:		5.50" x 1.90" x 4.08"		
Weight:		12.80 oz.		
Mounting:		DIN Rail mounting with latch		
Ordering Information				
Order Number	Type	Serial Ports	Ethernet Ports	Protocols
7940124932	IE-UGW-2TX-2RS232/485	2	2	EtherNet/IP, EtherNet/IP-PCCC, Modbus TCP, Modbus RTU, Modbus ASCII, DF1-PCCC, DF1-CIP, PPI, S7comm, DirectNET, CCM, HostLink.
7940124933	IE-UGW-2TX-4RS232/485	4	2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Weidmuller:

[7940124932](#) [7940124933](#)