
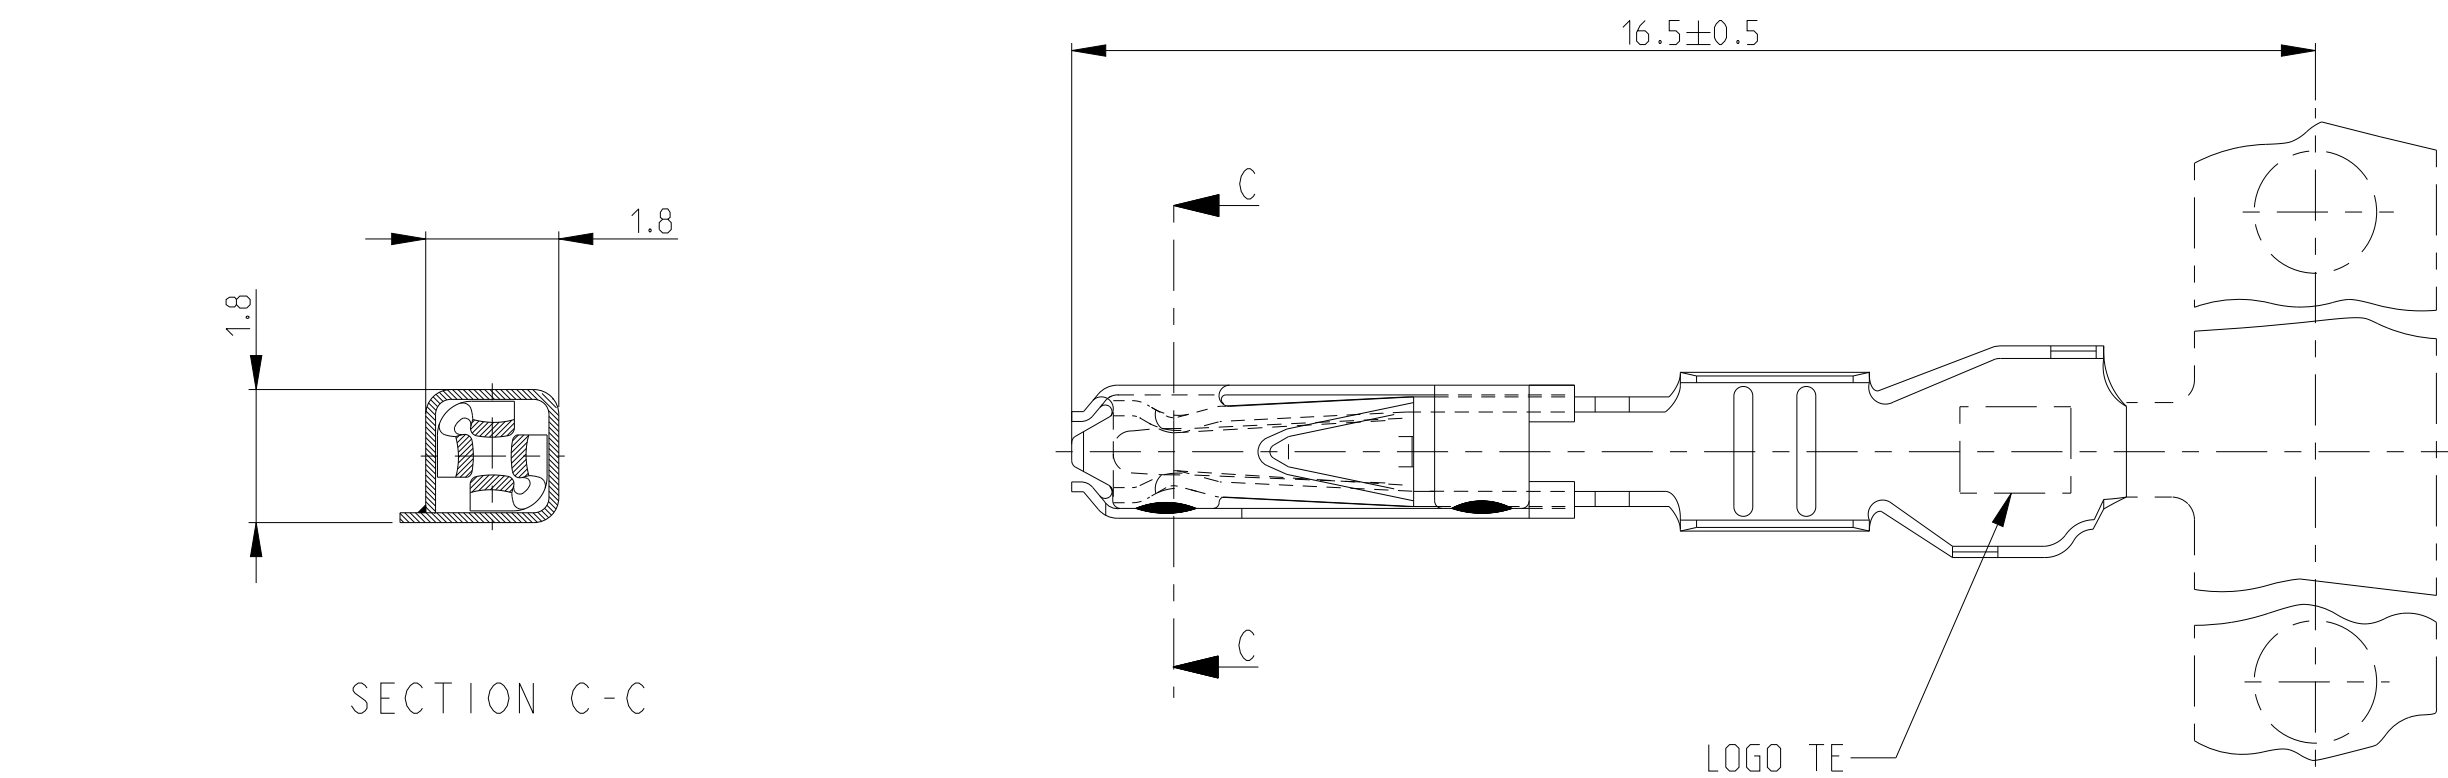


D

C


B

A

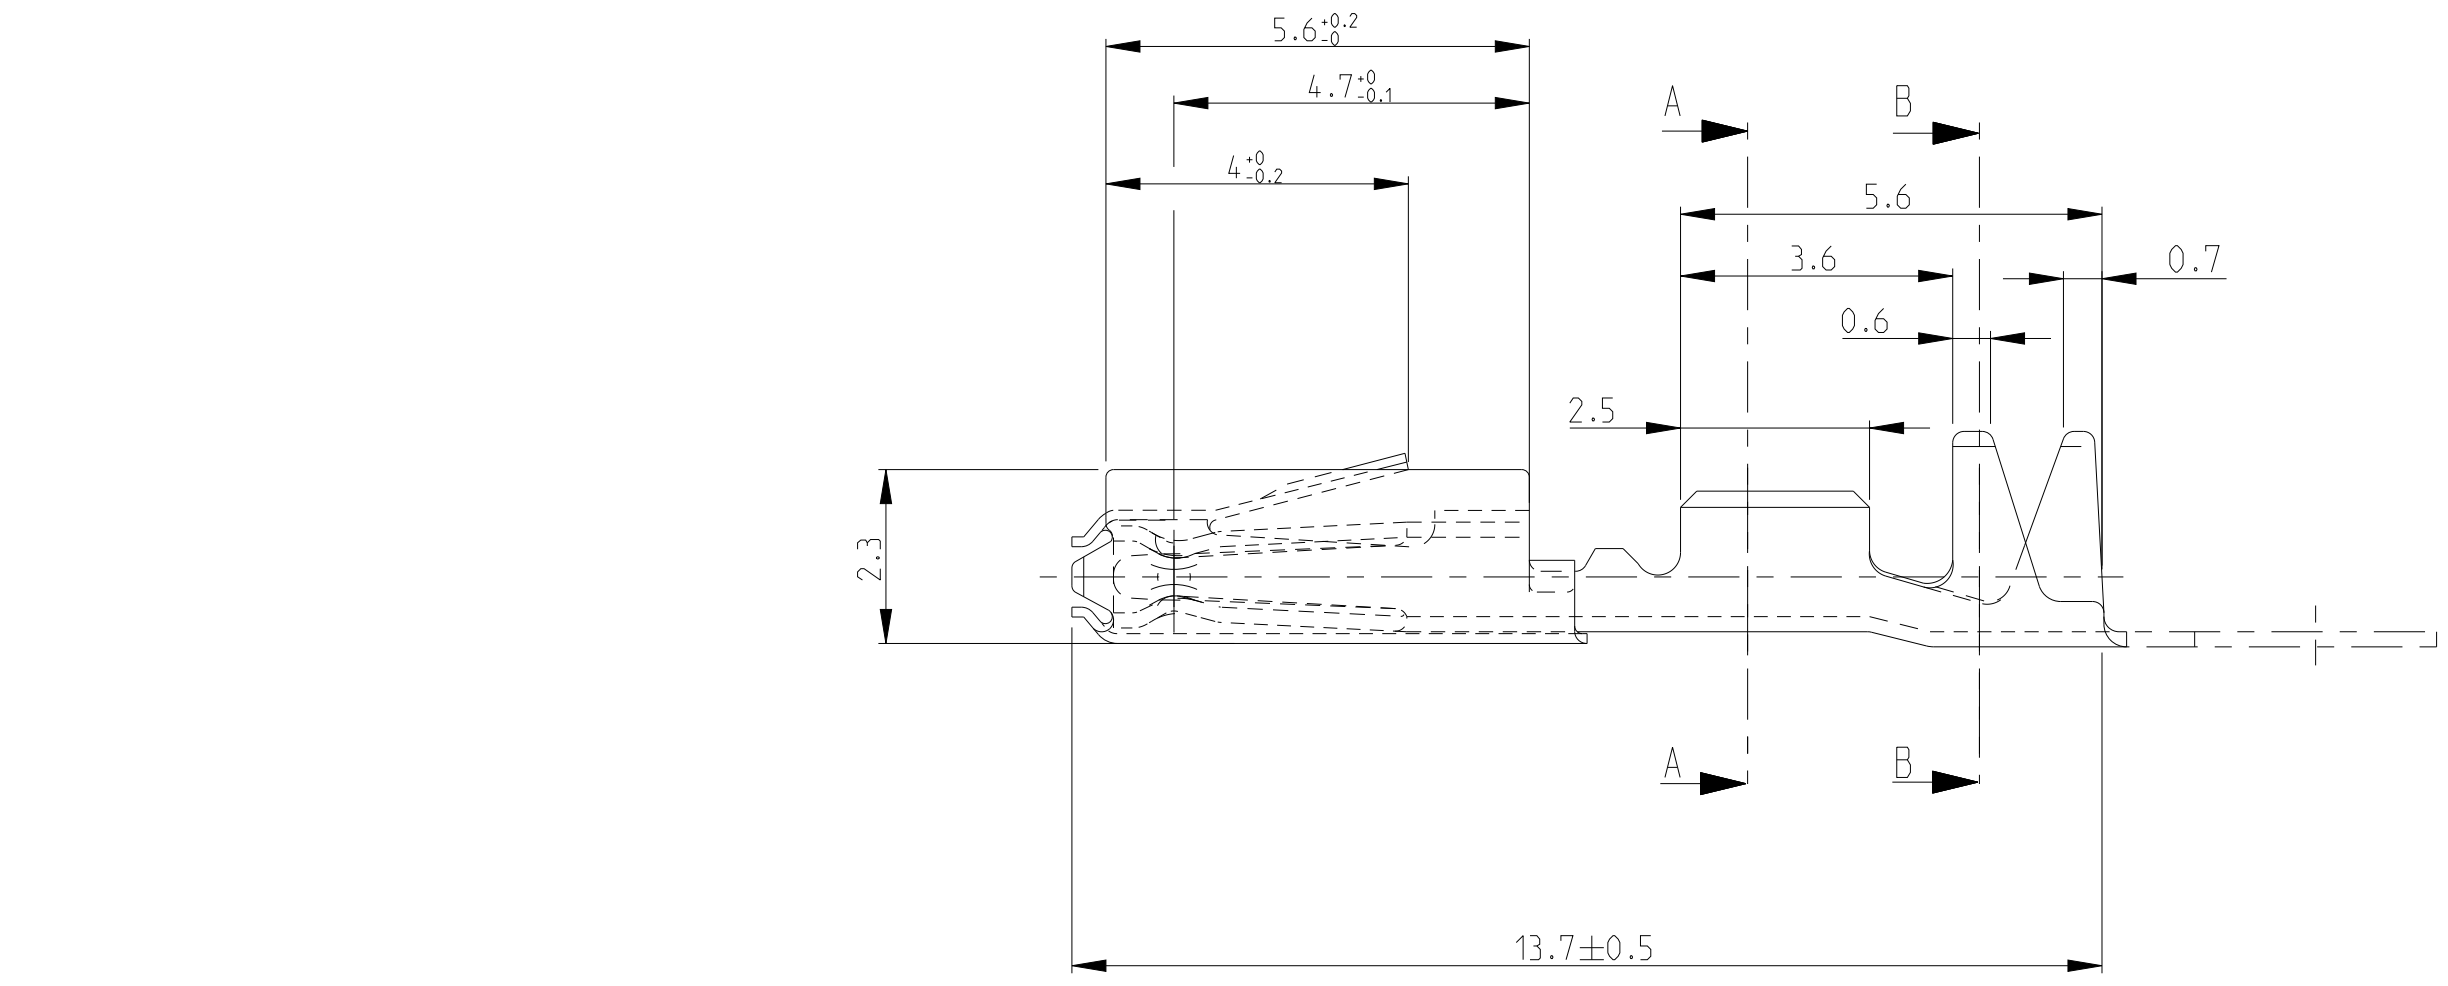


PART NUMBER	4 CONTACT POINTS	SPRING	CRIMP AREA
144969-4	Sn 0.8 to 2 µm	Au 0.4 to 0.8 µm	Sn 0.8 to 3.3 µm
144969-3	Au 0.4 to 0.8 µm	Sn 0.8 to 3.3 µm	Sn 0.8 to 3.3 µm
144969-2	Au 0.4 to 0.8 µm	Au 0.4 to 0.8 µm	Sn 0.8 to 3.3 µm
144969-1	Sn 0.8 to 2 µm PRETINNED	Sn 0.8 to 2 µm PRETINNED	Sn 0.8 to 2 µm PRETINNED


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	DRAWING CLARIFICATION WITH ALTERNATE DESIGN	03AUG2017	DB	JD
	F	PN 144969-3 obsolete	21OCT2021	AR	FJ

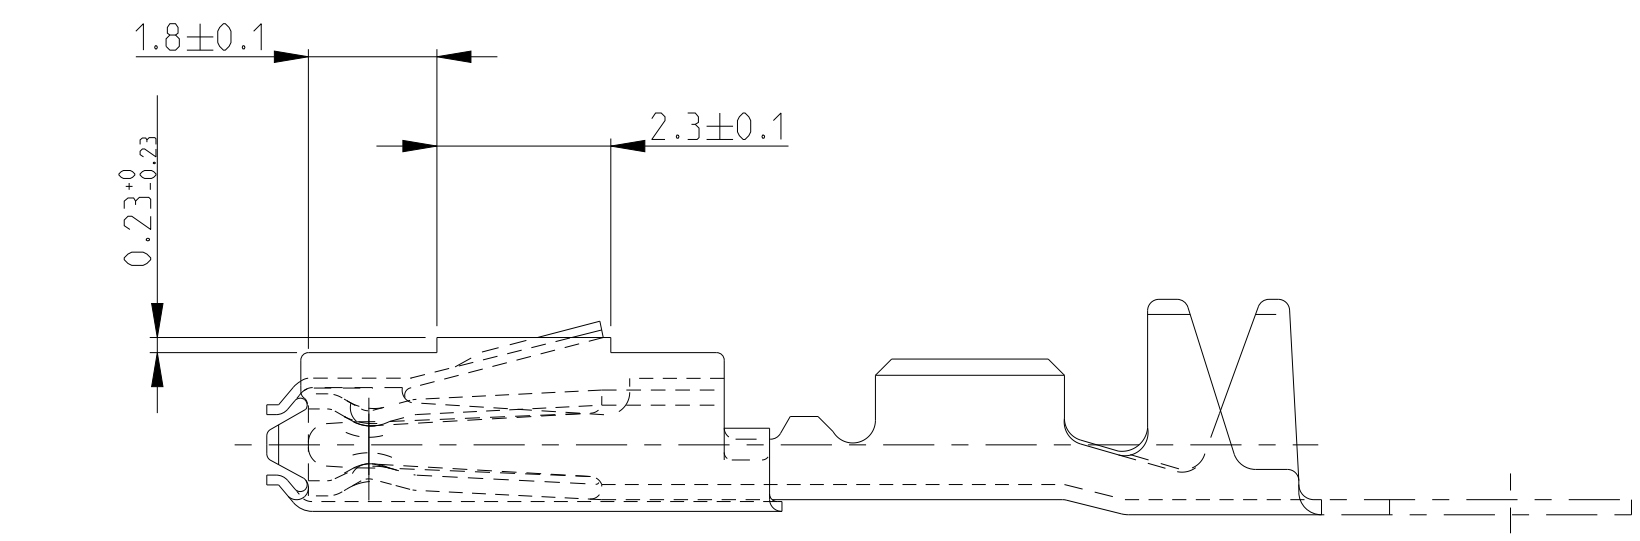

ALTERNATE DESIGN POSSIBLE
FOR THE SPRING

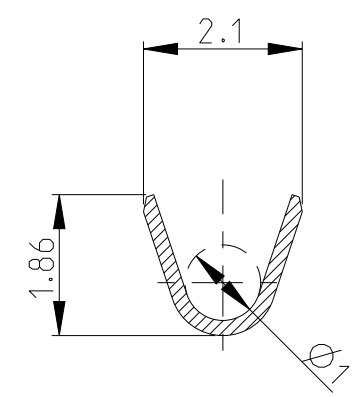

SECTION A-A

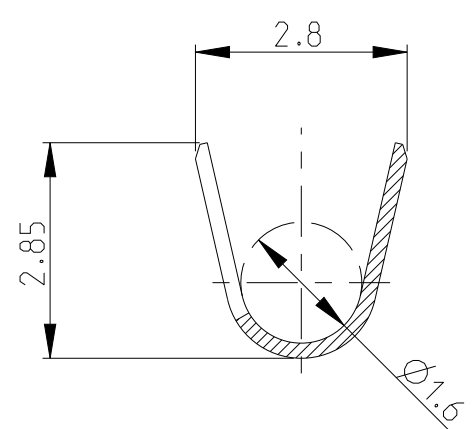

SECTION B-B

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. ROSI 04 JUN2012	TE Connectivity CLIP MQS A SERTIR (0.2-0.6 SQ mm) MQS RECEPTACLE WITH BARRIER CRIMP VERSION					
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2	CHK X. ROUILLARD 04 JUN2012						
		APVD J. DAHER 04 JUN2012						
		PRODUCT SPEC 108-18030 APPLICATION SPEC 114-15077 WEIGHT 0.2g						
		SIZE A2		CAGE CODE 00779	DRAWING NO C=144969	RESTRICTED TO -		
MATERIAL VOIR TABLEAU	ANGLES FINISH ±2° VOIR TABLEAU	CUSTOMER DRAWING				SCALE 10:1	SHEET 1 OF 1	REV F

D

C

B

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[144969-2 \(Cut Strip\)](#)