

NUMBER C-172795



三角度(3-d ANGLE PROJECTION)

METRIC


ALL DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT DIST



REV. 10/82

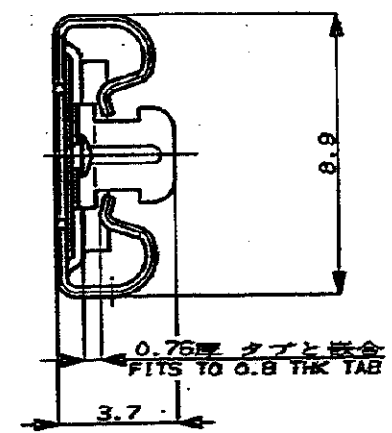

断面 A-A
SECT.



断面 B-B
SECT.

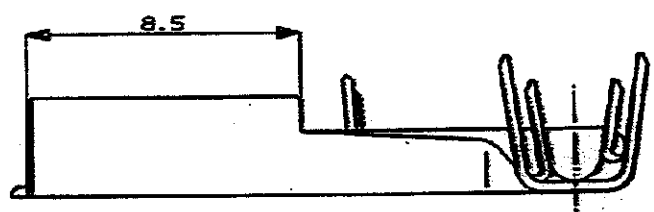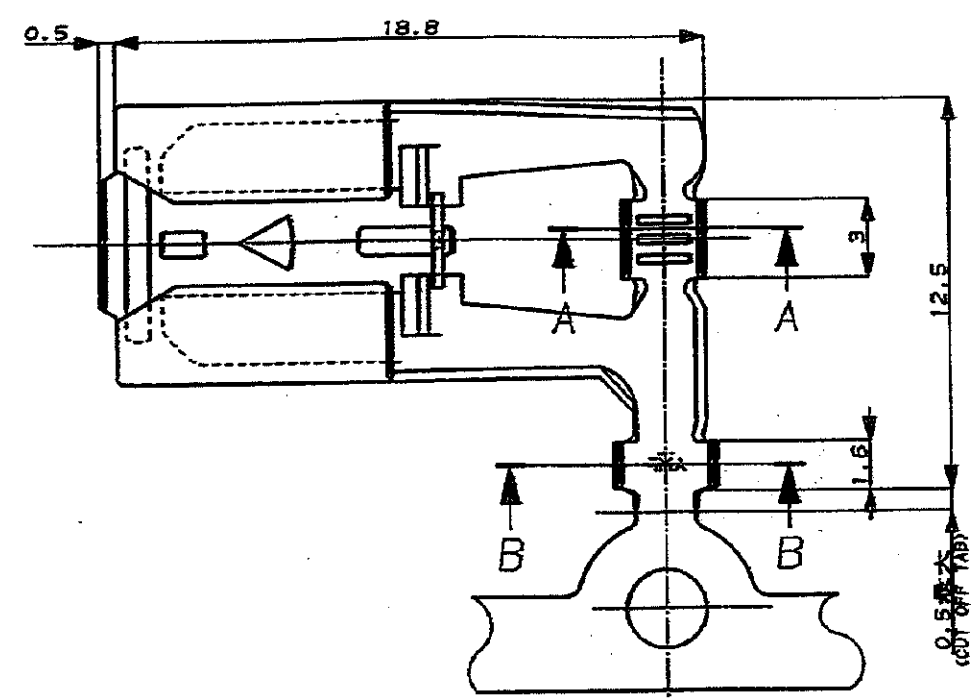

-1; 本図

注;

- 1 適用ハウジング型番; 172615
- 2 適用製品規格 NO.108-5131
- 3 適用圧着規格 NO.114-5079

NOTES;

- 1 THE MATING PLUG HSG P/N 172615
- 2 PRODUCT SPEC NO.108-5131
- 3 APPLICATION SPEC NO.114-5079

Copyright © 1982 AMP (Japan), LTD. ALL RIGHTS RESERVED.		Copyright © 1982 AMP (Japan), LTD. ALL RIGHTS RESERVED.		AMP 東京エレクトロニクス株式会社 Tokyo, Japan	
適合電線径 (WIRE RANGE) AW 0.5-2mm ² (AWG20-14)		適合挿入径 (INSULATION DIA.) 2.2-3.4 mm		名称 (NAME) "312"シリーズ ポジティブ ロック リセプタクル (旗型 L)	
適合材料 (MATERIAL) PBT-100 (UL94V-0)		仕上 (FINISH)		一般公差 (GENERAL TOLERANCES) HOLE: ±0.2 SHAFT: ±0.25 ANGLE: ±0.3 R: ±0.3	
A 製作 J-1349		DR. K. YAMADA		REV. K. YAMADA	
LTR 変更 (REVISION RECORD)		DR. CHK. DATE		APP. K. YAMADA	
				LOC. B J	
				REV. A	
				SHEET 1 OF 1	

(CUSTOMER DRAWING) 参考図面

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[172795-1](#)