
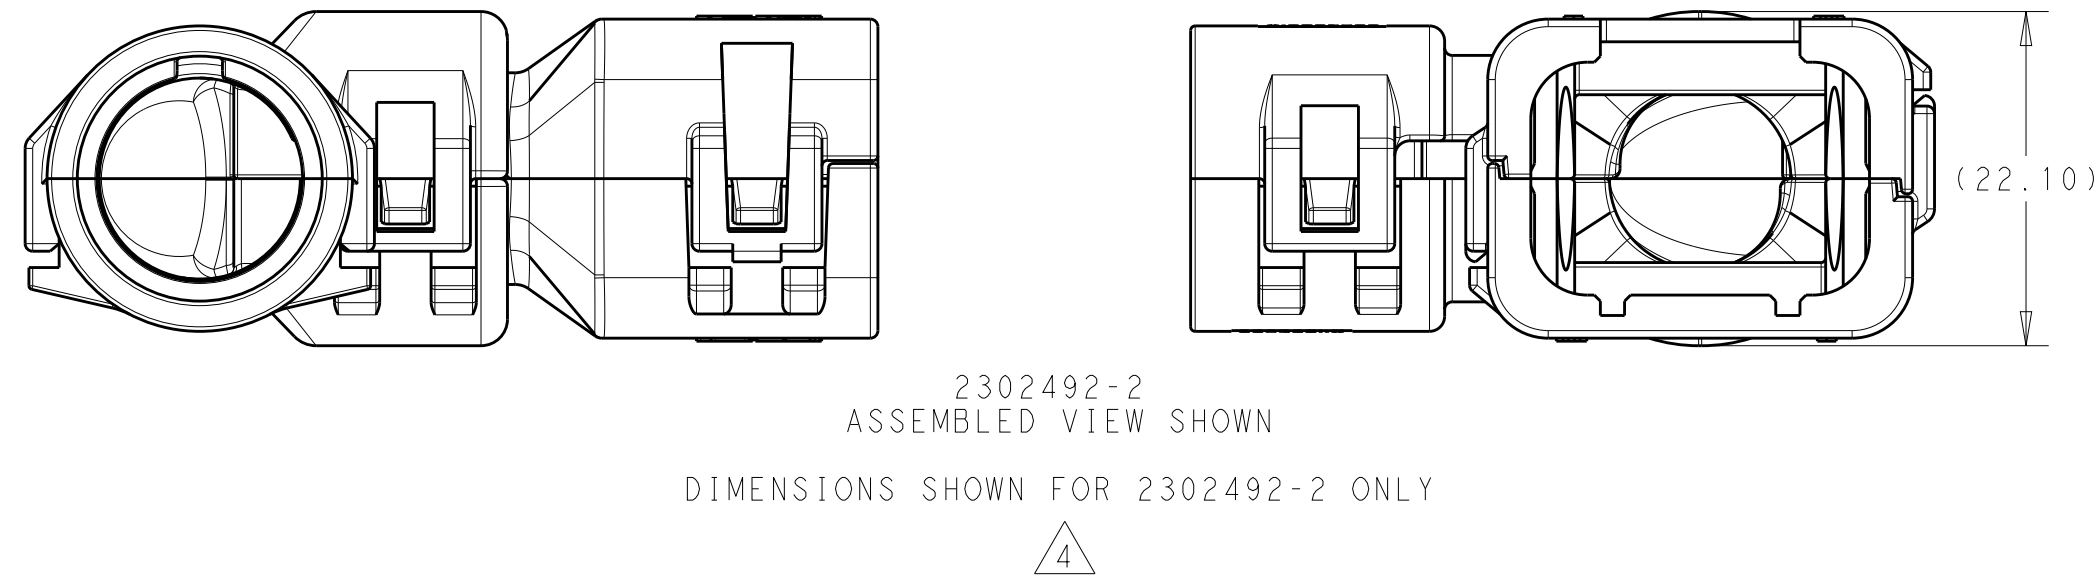
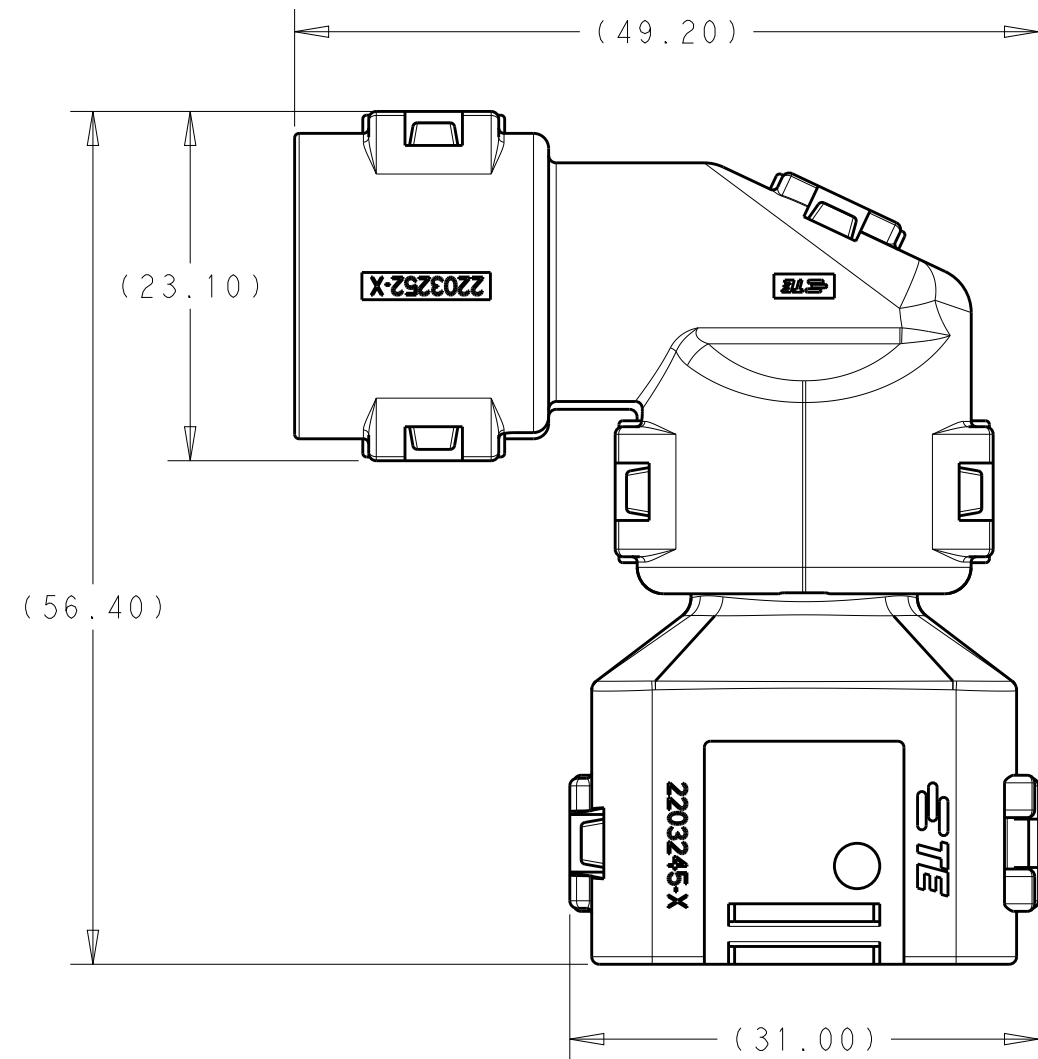
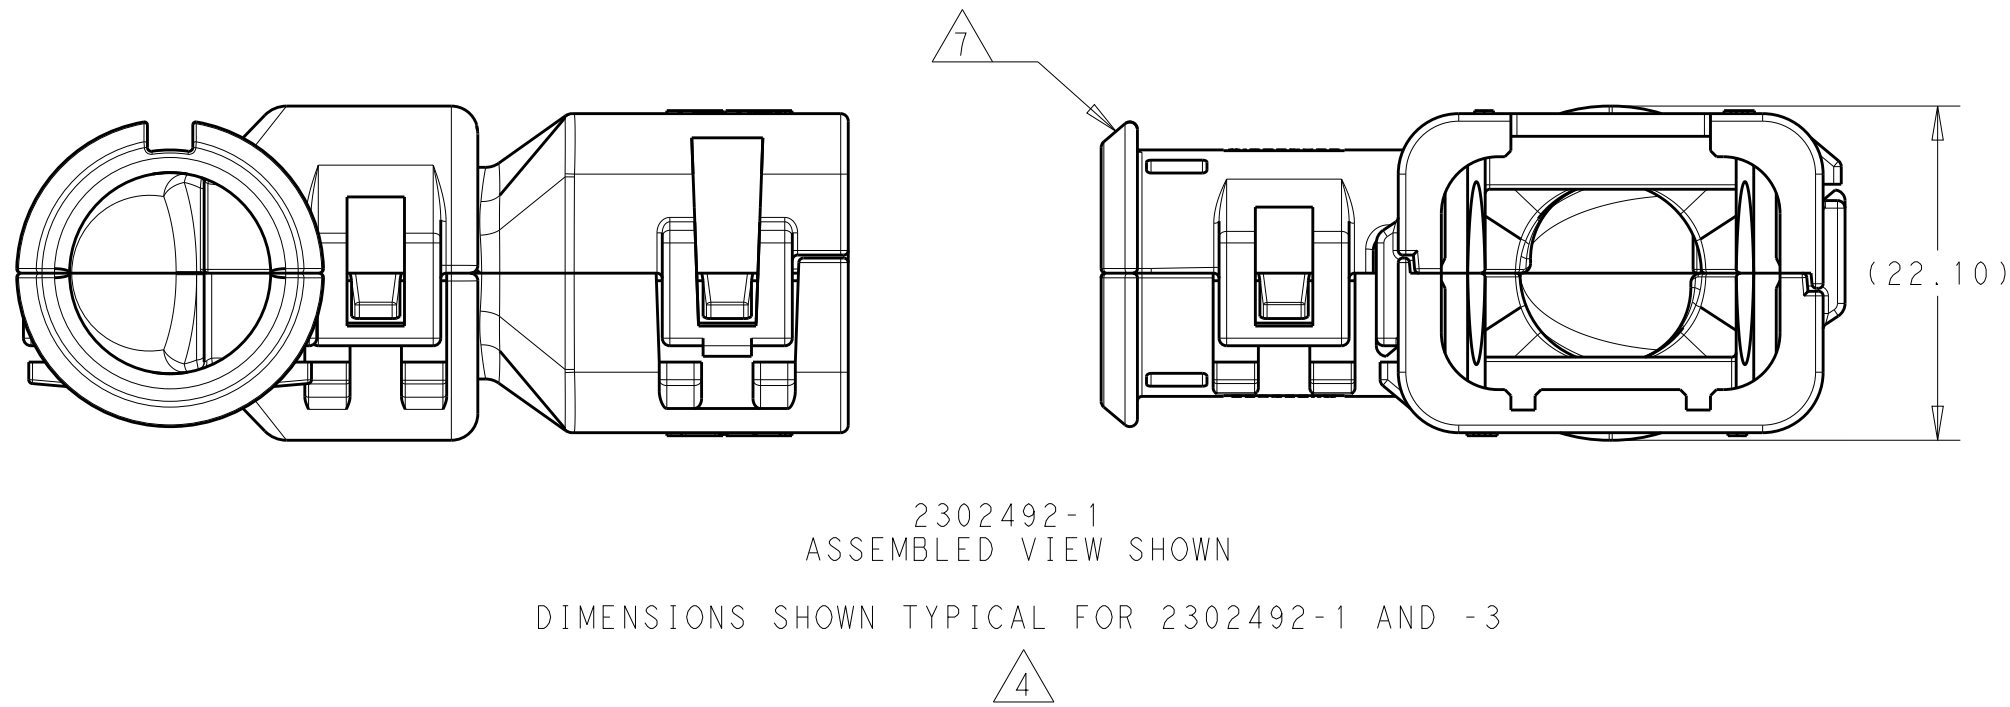
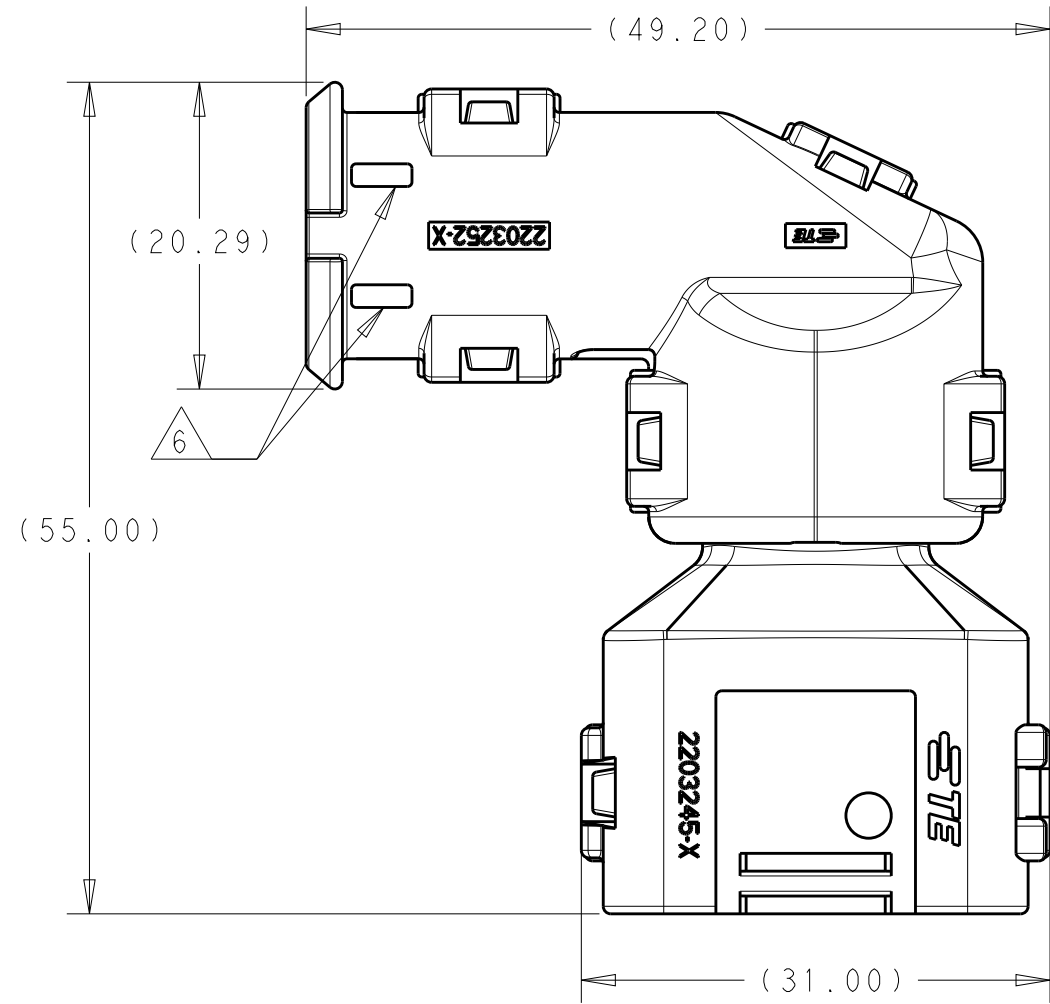
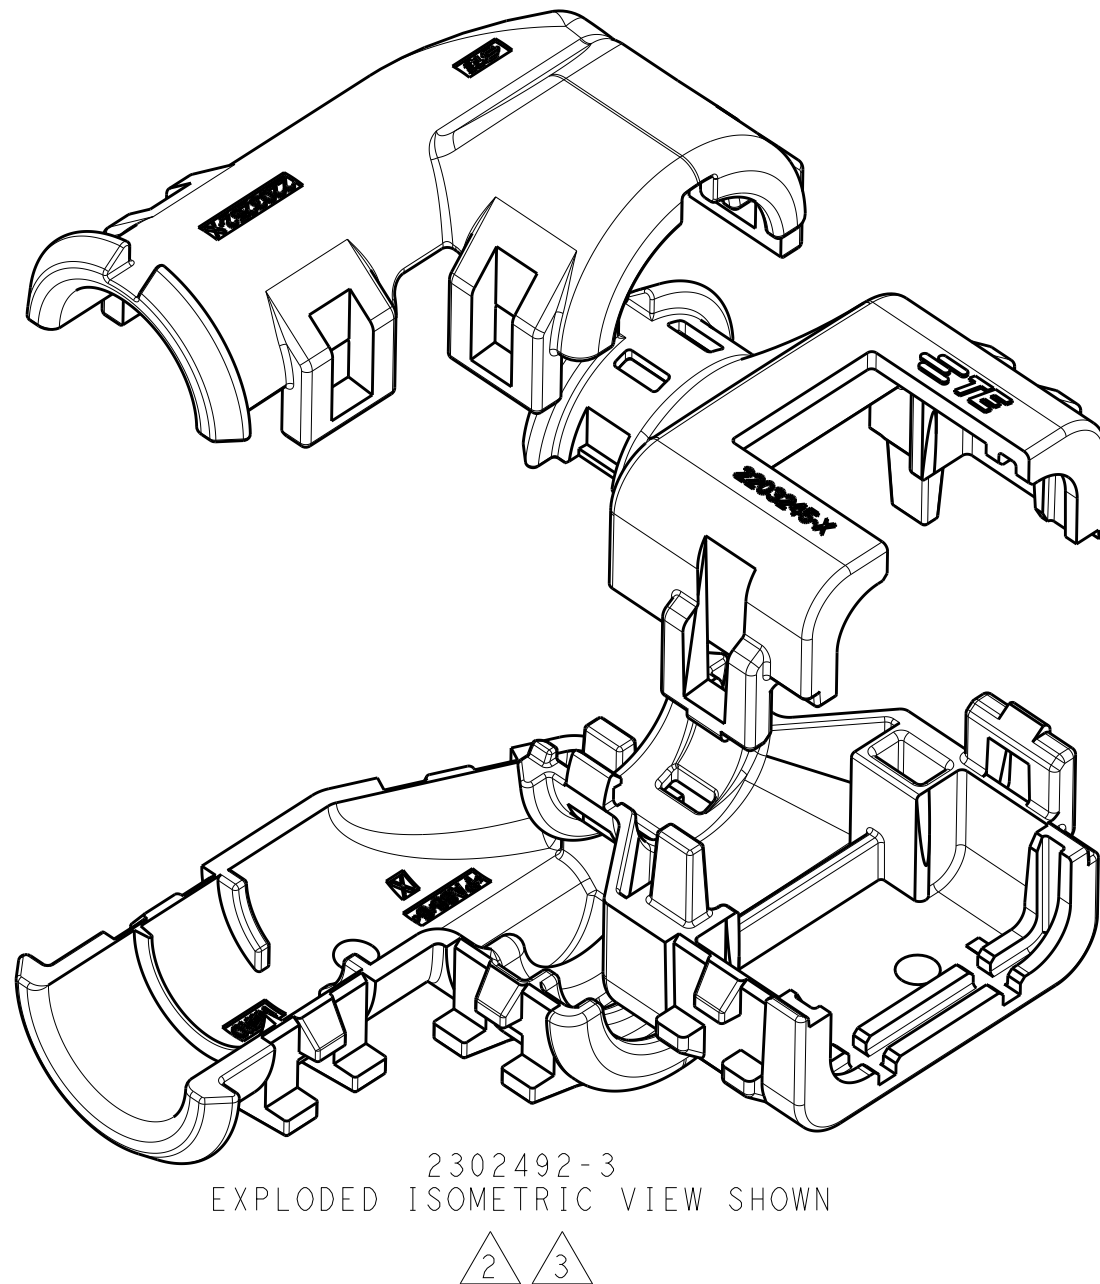
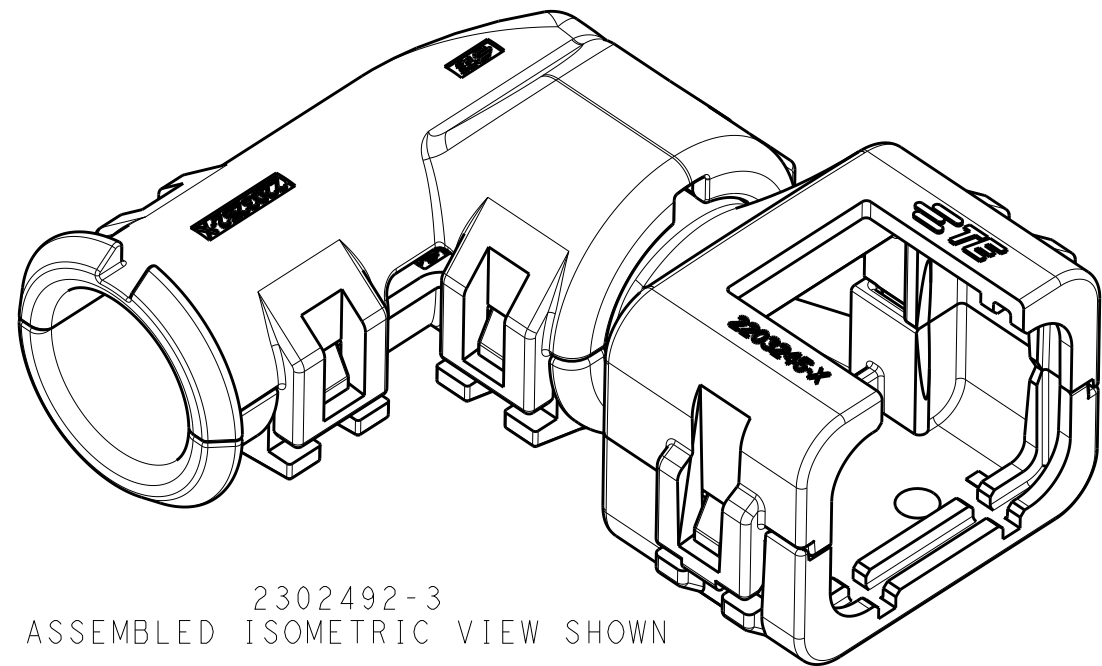
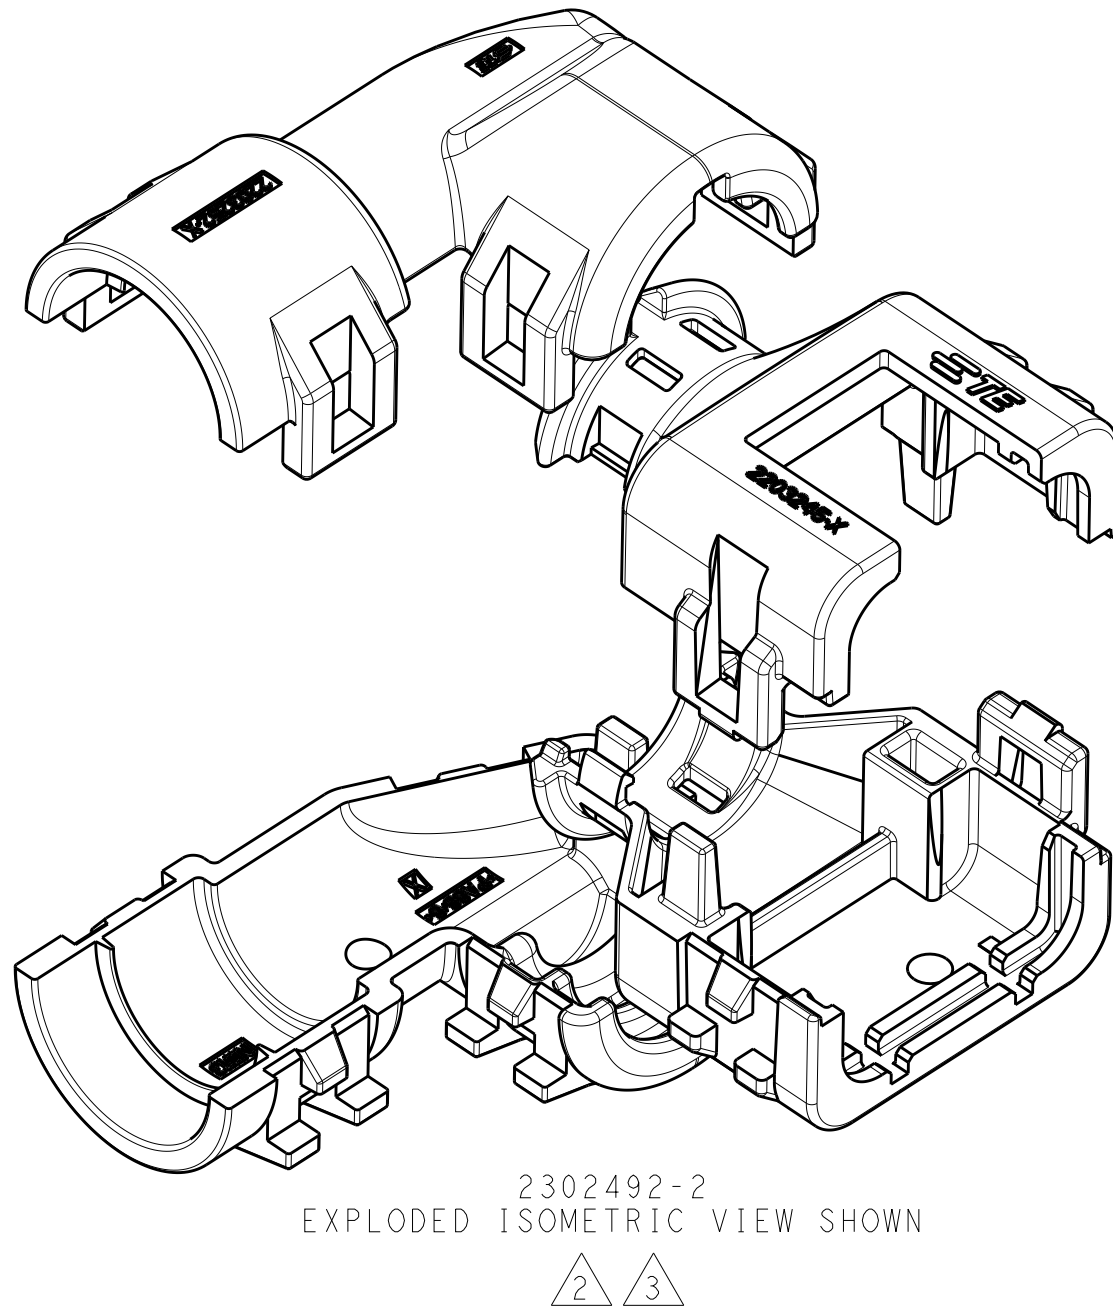
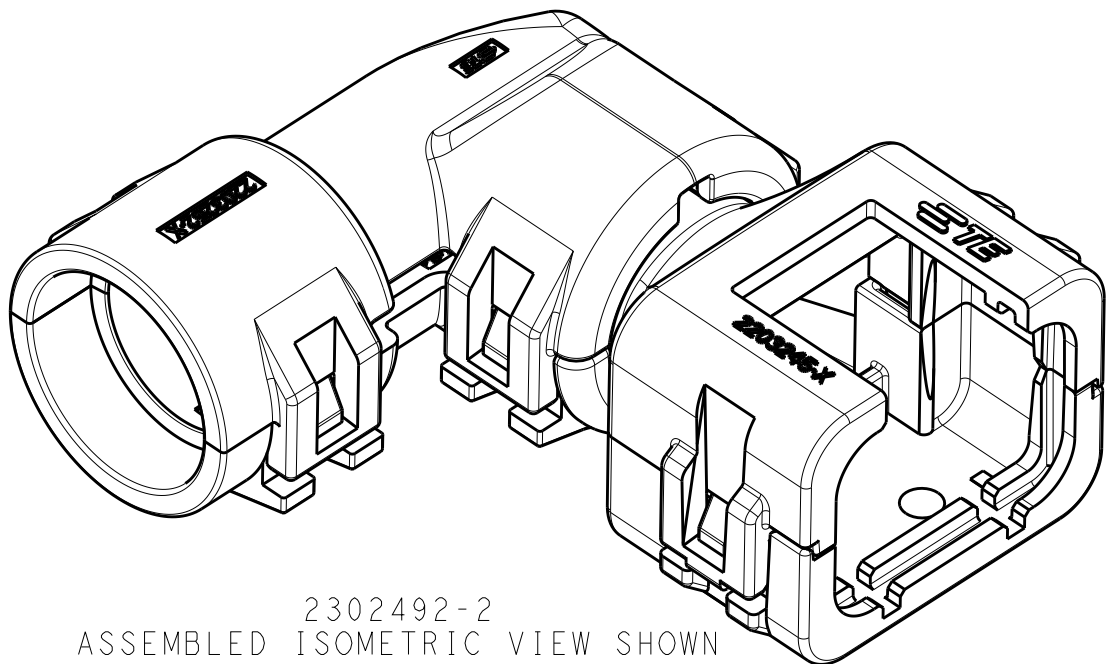
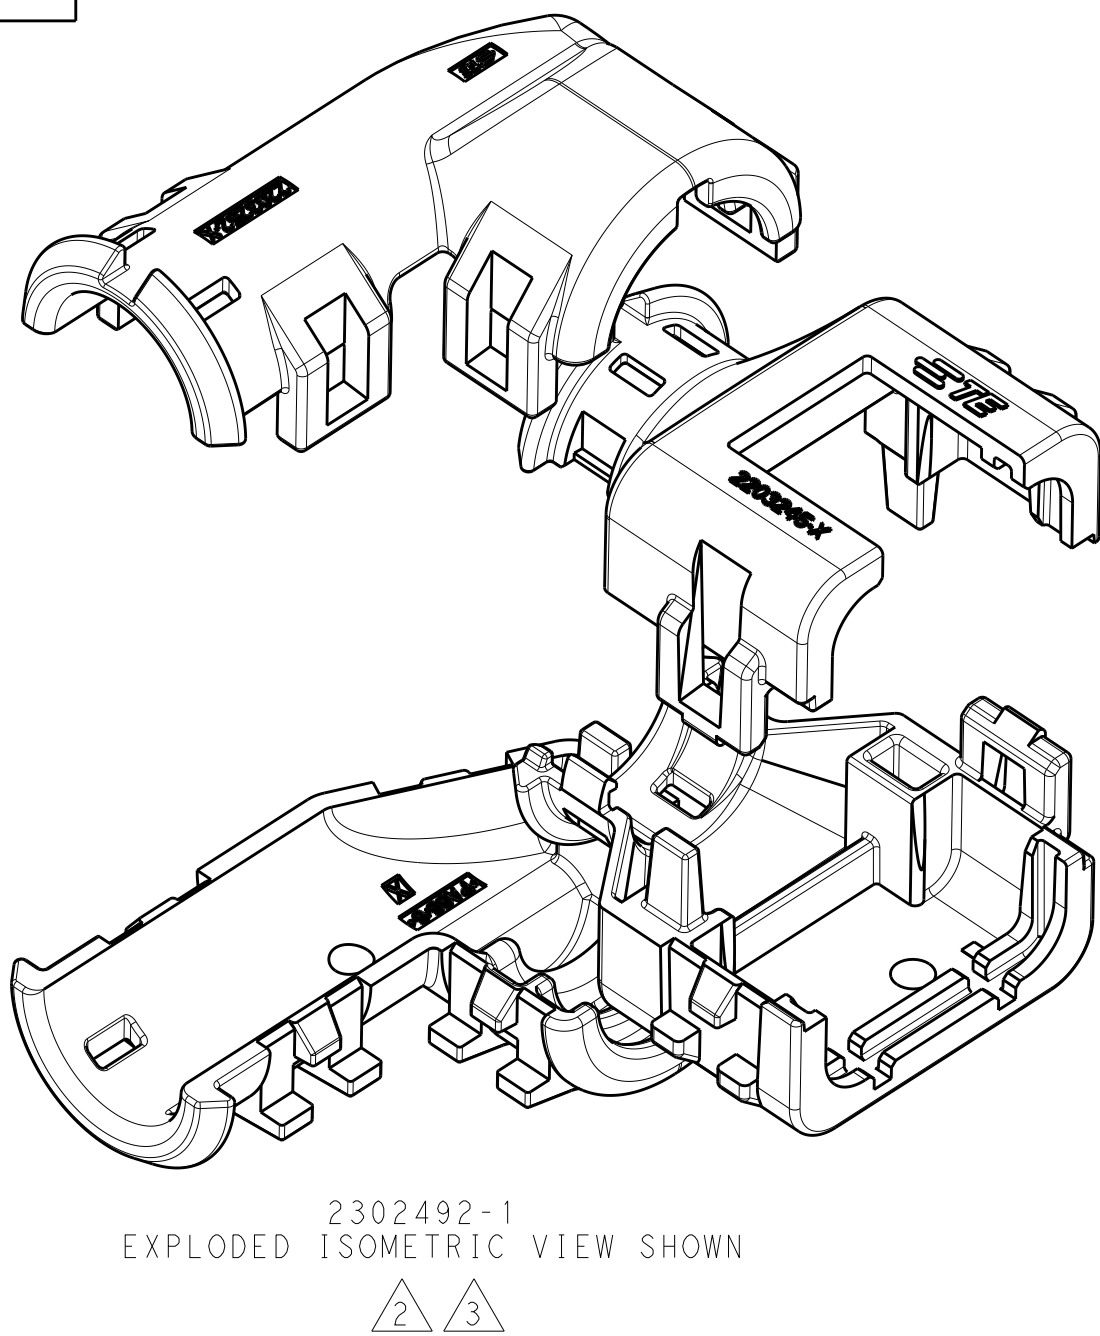


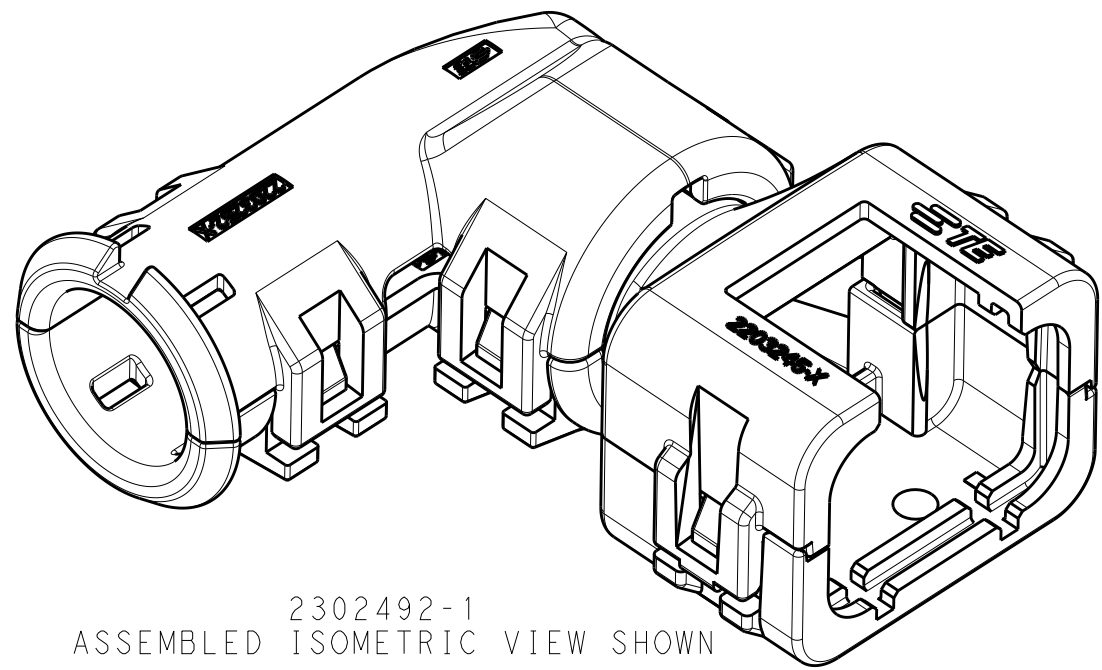

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECO-16-008203	01JUN2016	JM	RB
	A2	REV PER ECO-16-013256	08SEP2016	JM	RB

- 1 MATERIAL: NYLON MOLDING COMPOUND, BLACK, PA66/6.
- 2 BACKSHELL DESIGNED SUCH THAT TWO HALVES ATTACH TO ONE ANOTHER AND CLAMP AROUND THE CONNECTOR COVER.
- 3 ELBOW DESIGNED SUCH THAT TWO HALVES ATTACH TO ONE ANOTHER AND CLAMP AROUND THE BACKSHELL COLLAR.
- 4 DIMENSIONS TO BE MEASURED WHEN ELBOWS AND BACKSHELLS ASSEMBLED.
- 5 PRODUCT WEIGHTS:
2302492-1: 11.15g ASSEMBLED
2302492-2: 11.95g ASSEMBLED
2302492-3: 11.30g ASSEMBLED
- 6 4MM WIDE SLOTS FOR TIE WRAP TO SECURE HARNESS WIRES (-1 ONLY).
- 7 HEAT SHRINK TUBING FEATURE (-1 AND -3 ONLY).
8. INSTRUCTION SHEET: 408-151043
9. CONDUIT PROFILE: NORMAL ONLY.

776487-X 776524-X	NC12	NW10	2302492-3
	NC16	NW13	2302492-2
	SMOOTH	SMOOTH	2302492-1
FITS ON PLUG ASSY	CORREGATE NC	CORREGATE NW	PART NUMBER
	CONDUIT SIZE		

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN J MCNEAL 13APR2016			
DIMENSIONS: mm[INCHES]				CHK R BALTER 13APR2016			
TOLERANCES UNLESS OTHERWISE SPECIFIED:				APVD R BALTER 13APR2016			
0 PLC ±				PRODUCT SPEC			
1 PLC ±				108-151043			
2 PLC ±				APPLICATION SPEC			
3 PLC ±				SIZE CAGE CODE DRAWING NO			
4 PLC ±				A100779C=2302492			
ANGLES ±				RESTRICTED TO			
FINISH ±				SCALE 2:1 SHEET 1 OF 1 REV A2			
MATERIAL 1				CUSTOMER DRAWING			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2302492-3](#)