


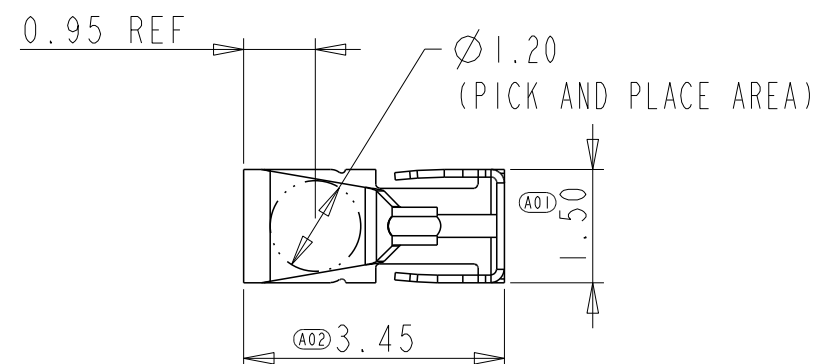



P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	23JUL2014	J. J	W. H
	AI	ECR-15-004731	20APR2015	T. Q	W. H


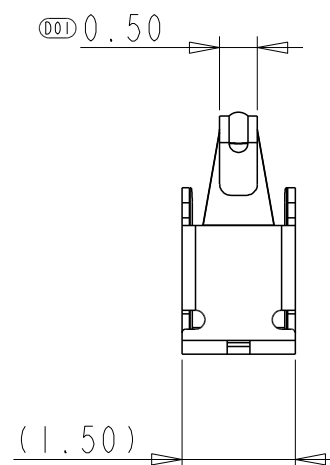


3D VIEW
ONLY FOR REFERENCE

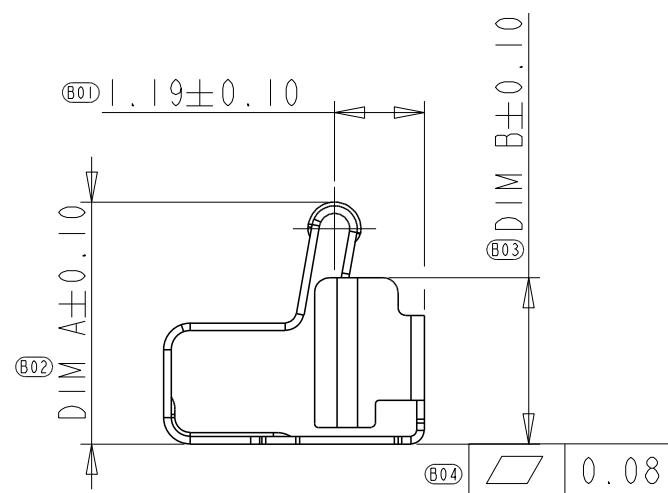



- 1 PART NUMBER: SEE TABLE.
- 2 MATERIAL: COPPER ALLOY, THICKNESS=0.10MM.
- 3 PLATING: 2um MIN. NICKEL UNDERLAYER ALL OVER
0.50um MIN. GOLD ON CONTACT SURFACE
GOLD FLASH ON SOLDERING SURFACE


4 PICK AND PLACE SURFACE $\varnothing 1.2\text{MM}$.

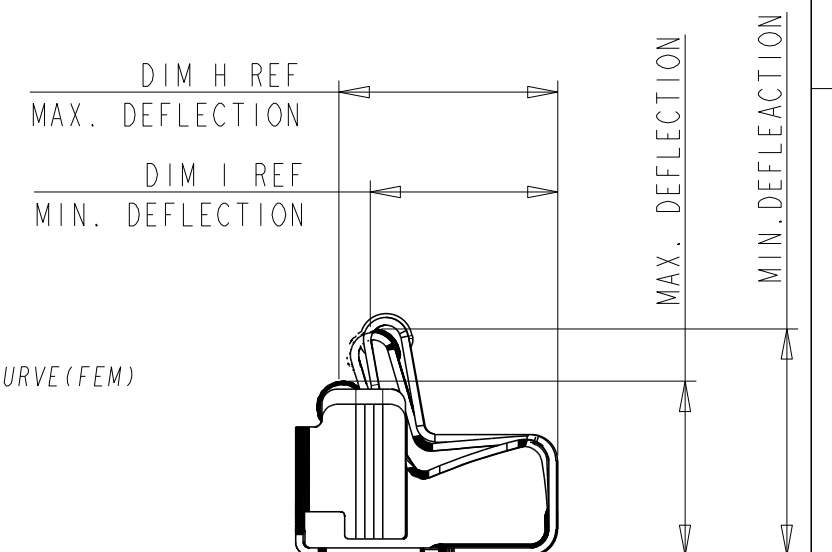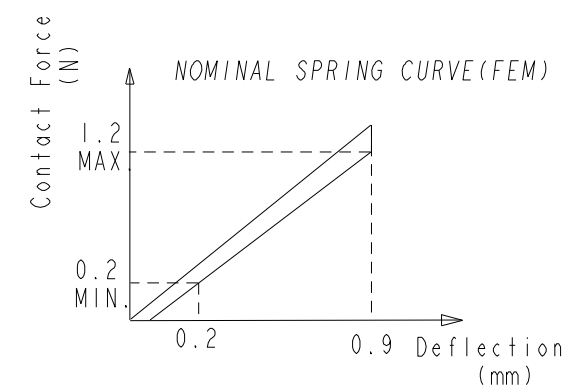

DEFORMED VIEW
FOR REFERENCE

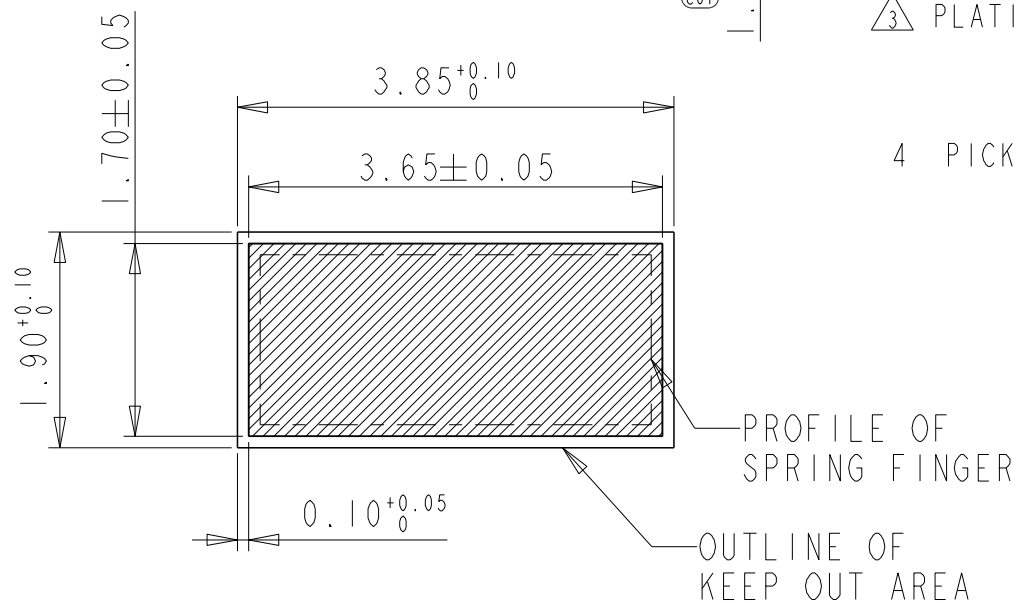

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TONY ZHANG 24MAY2013		 TE Connectivity									
DIMENSIONS: mm		CHK WENKE HE 24MAY2013											
		APVD WENKE HE 24MAY2013		NAME SPRING FINGER TYPE C									
		PRODUCT SPEC 108-115061-1											
MATERIAL		APPLICATION SPEC -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO						
		FINISH 		A3	00779	C-2199250	-						
CUSTOMER DRAWING						SCALE	N/A	SHEET	1	OF	2	REV	A1

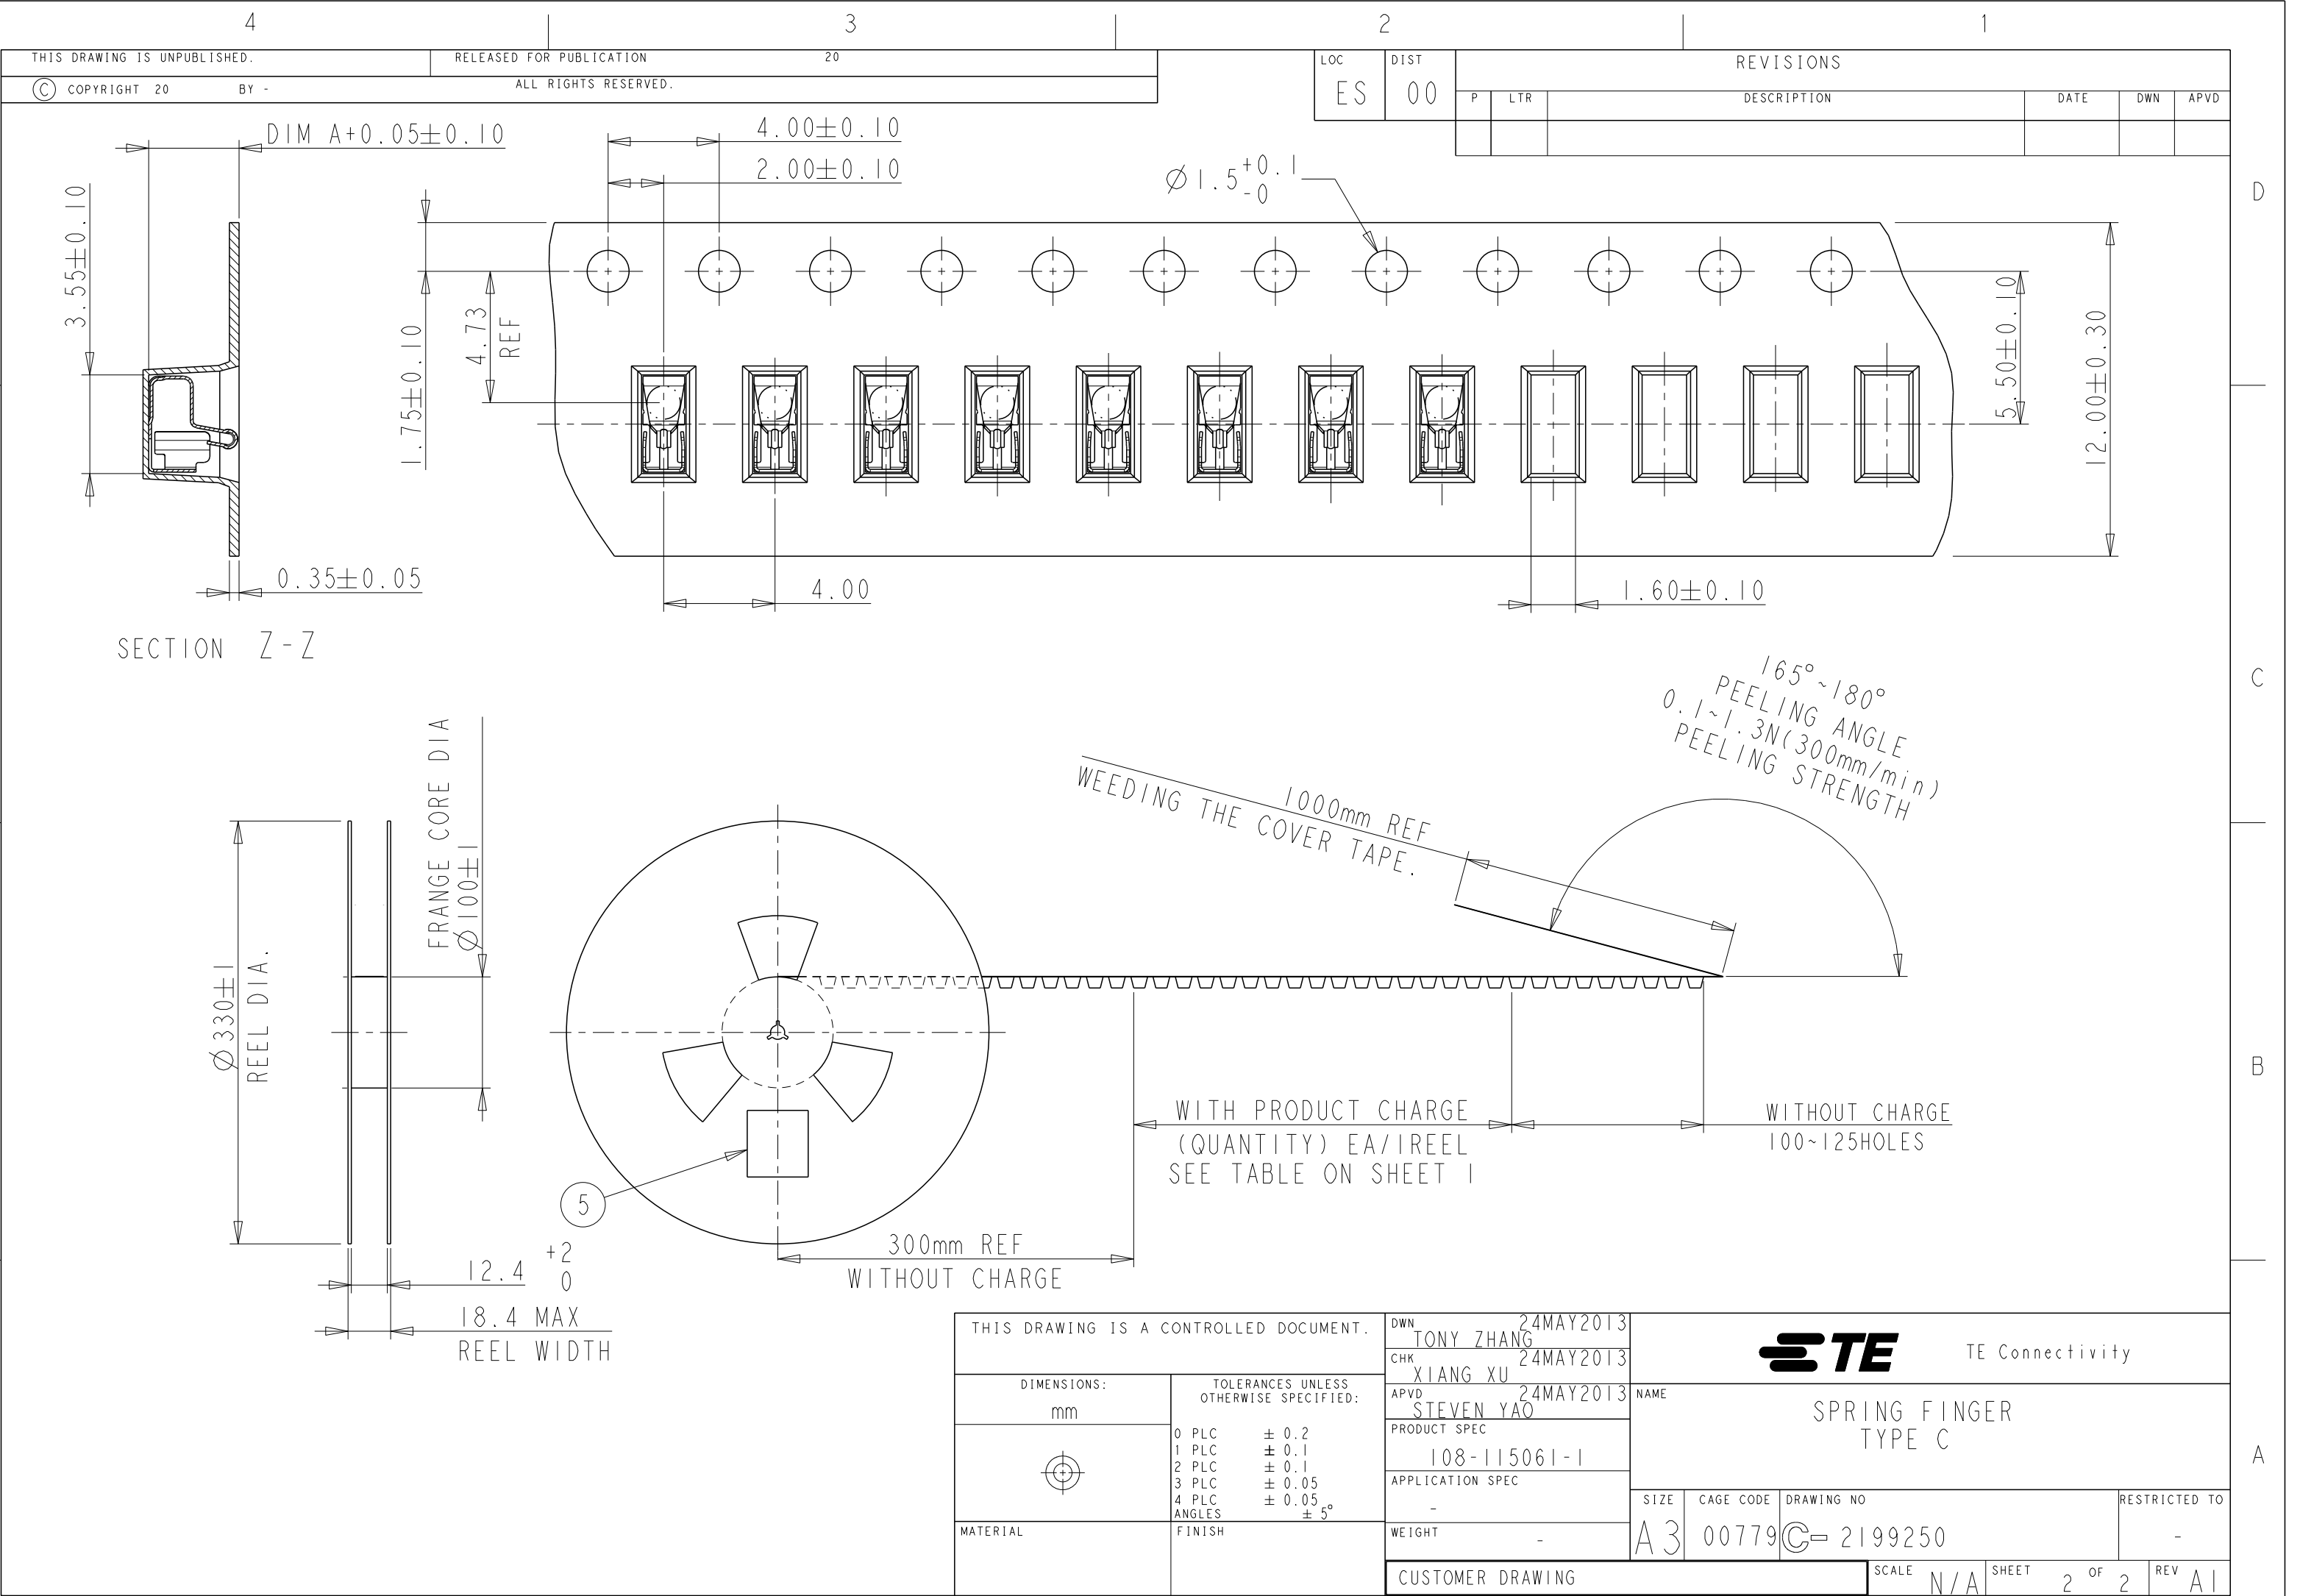

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-2199250-2](#)