


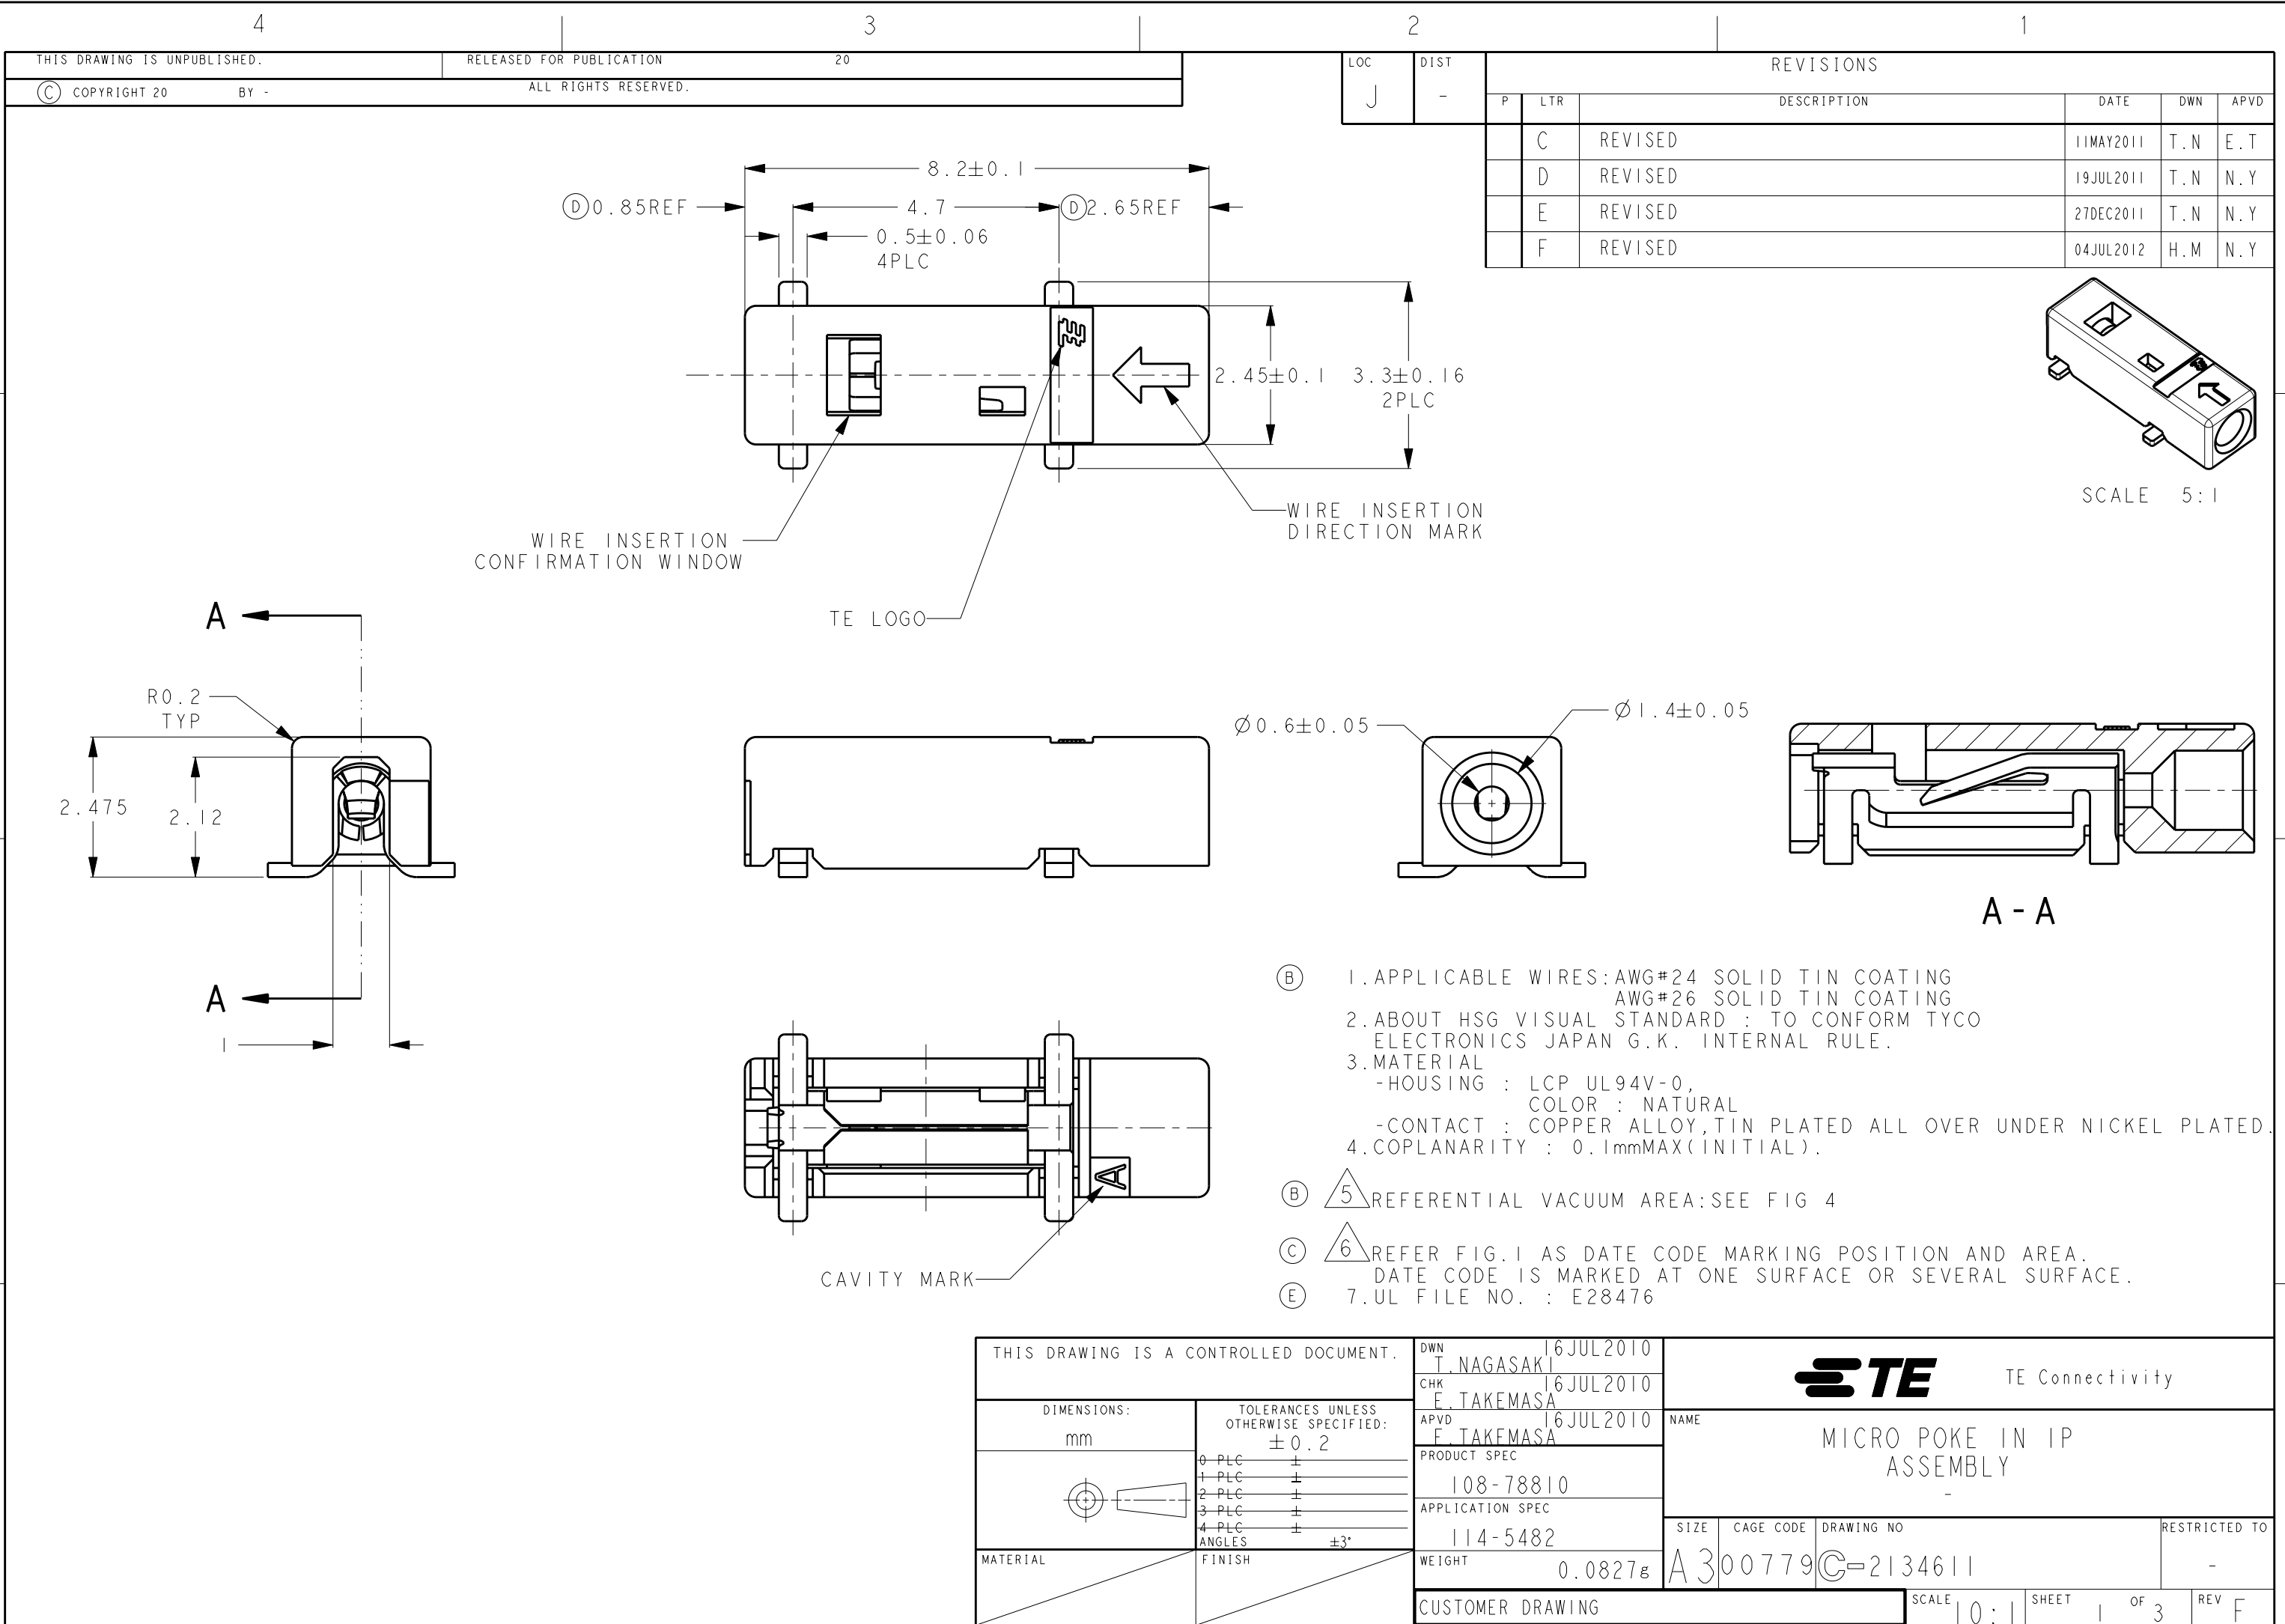

2		1					
LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

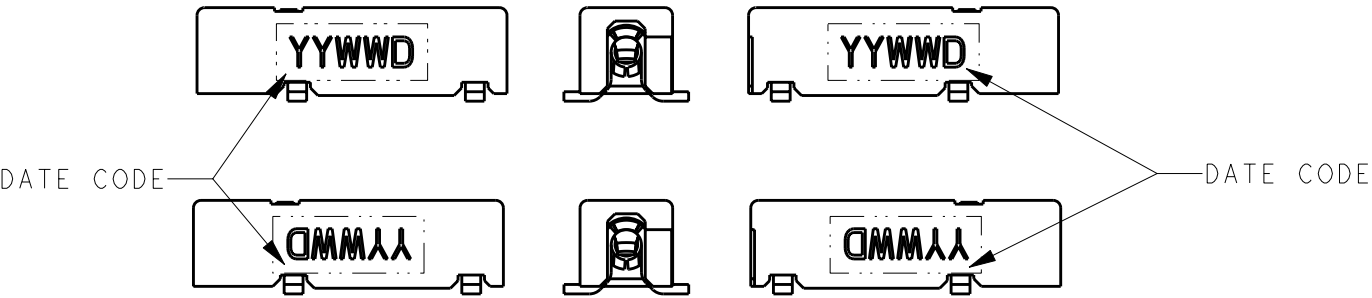


FIG.1 DATE CODE MARKING POSITION AND AREA

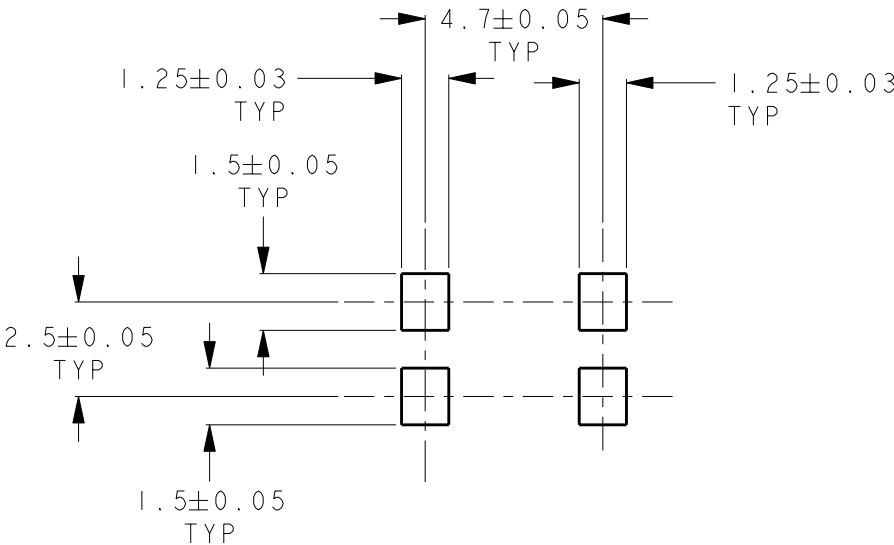


FIG.2 REFERENTIAL P.C.B LAYOUT

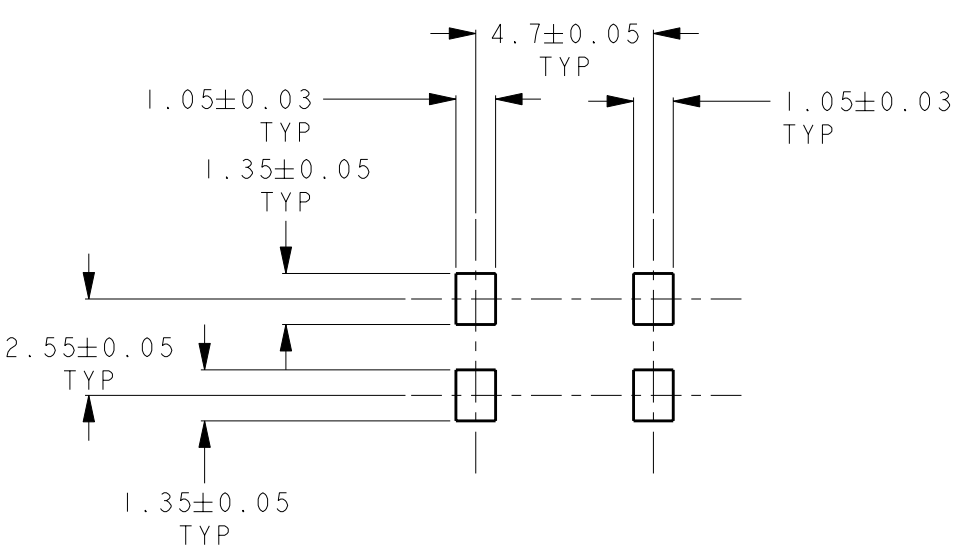


FIG.3 REFERENTIAL METAL MASK PAD OPENING
REFERENTIAL METAL MASK THICKNESS IS 0.15mm

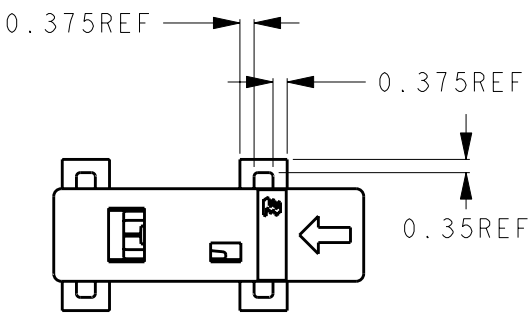


FIG.5 REFERENTIAL CONNECTOR PLACEMENT

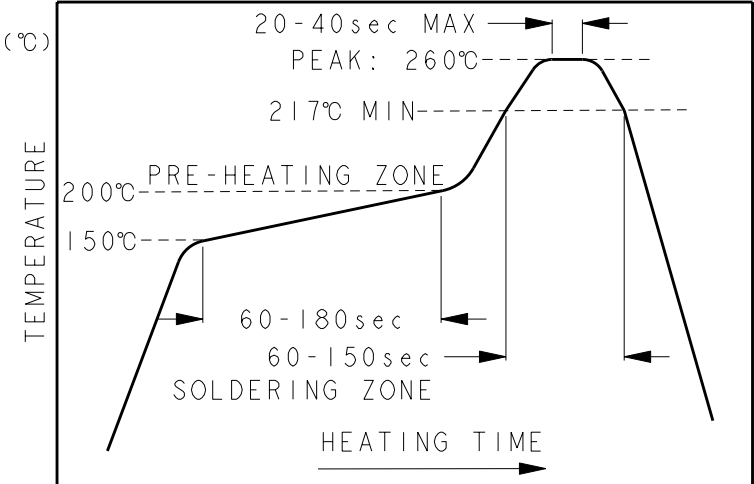


FIG.6 REFERENTIAL REFLOW TEMPERATURE PROFILE
(BASED ON IPC/JEDEC J-STD-020C)



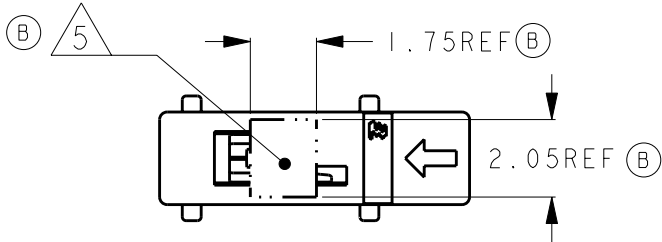


FIG.4 REFERENTIAL VACUUM AREA

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
		CHK			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.2		NAME	
		0 PLC ±		MICRO POKE IN IP ASSEMBLY -	
		1 PLC ±			
		2 PLC ±			
		3 PLC ±			
		4 PLC ±			
ANGLES ±3°		PRODUCT SPEC		DRAWING NO	
APPLICATION SPEC		APVD		RESTRICTED TO	
MATERIAL		FINISH		SIZE	
				CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				-	
				A300779C-2134611	
				SCALE	
				SHEET 2 OF 3	
				REV F	

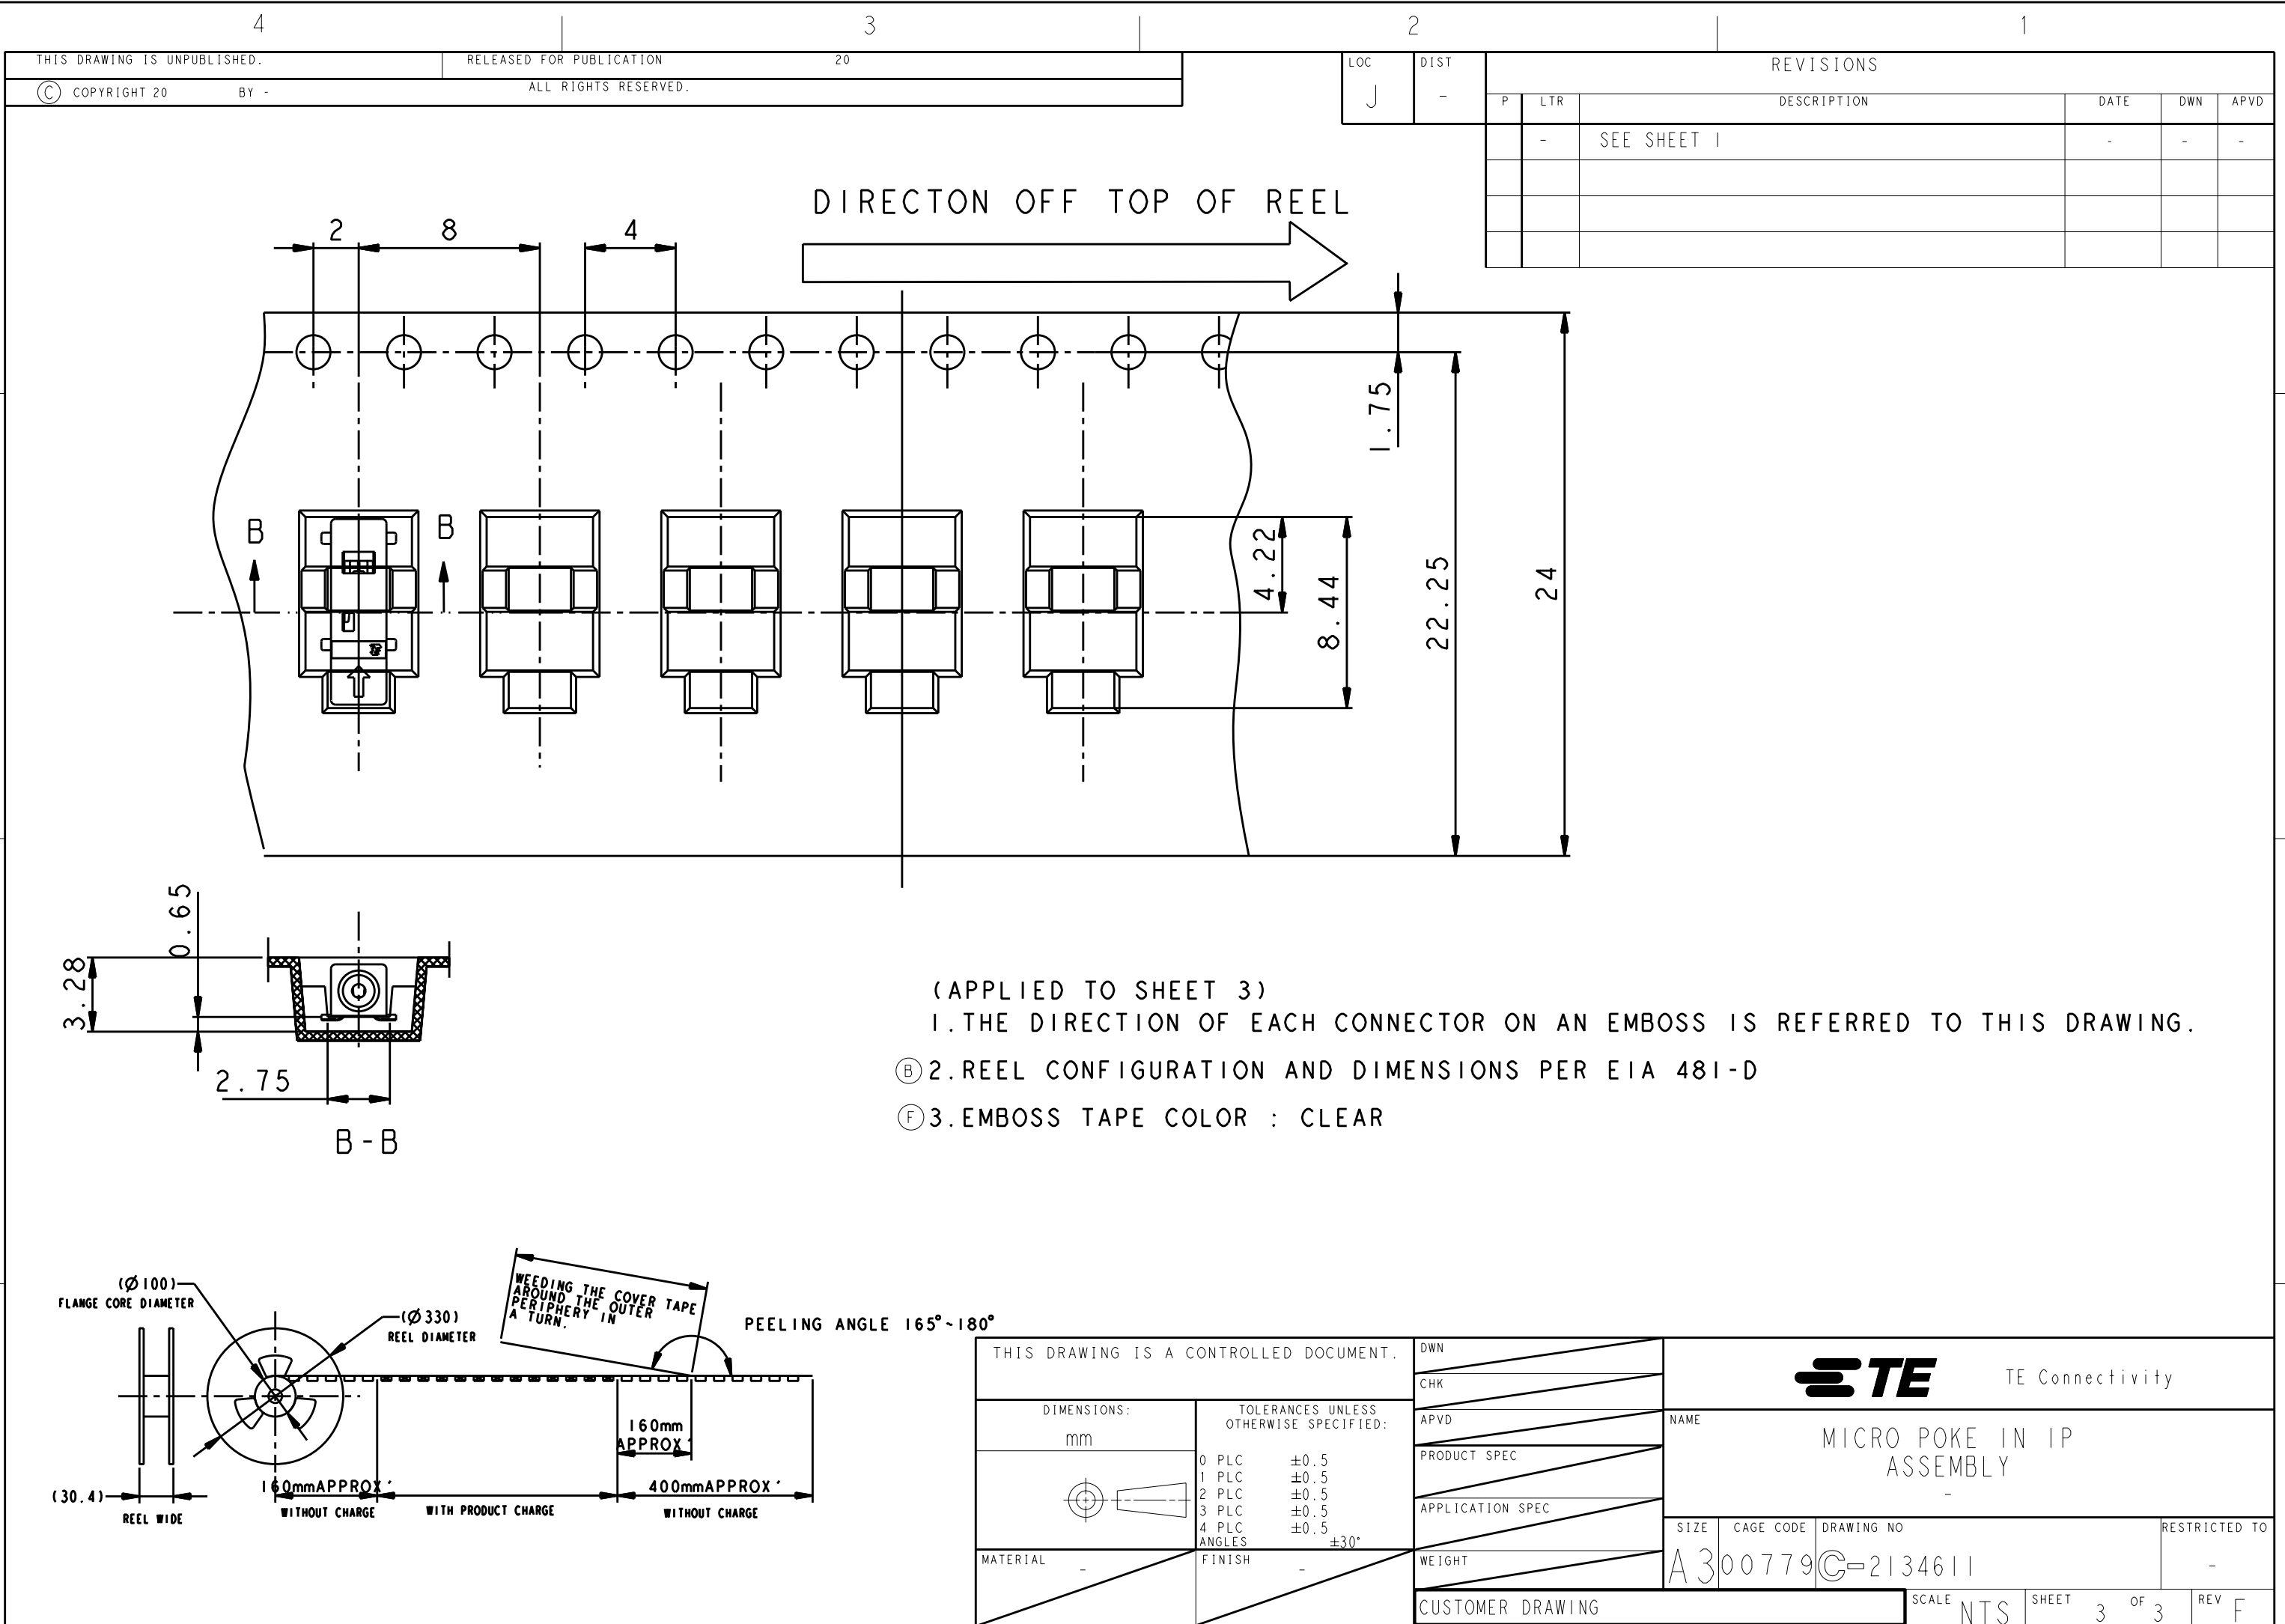

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2134611-1](#)