
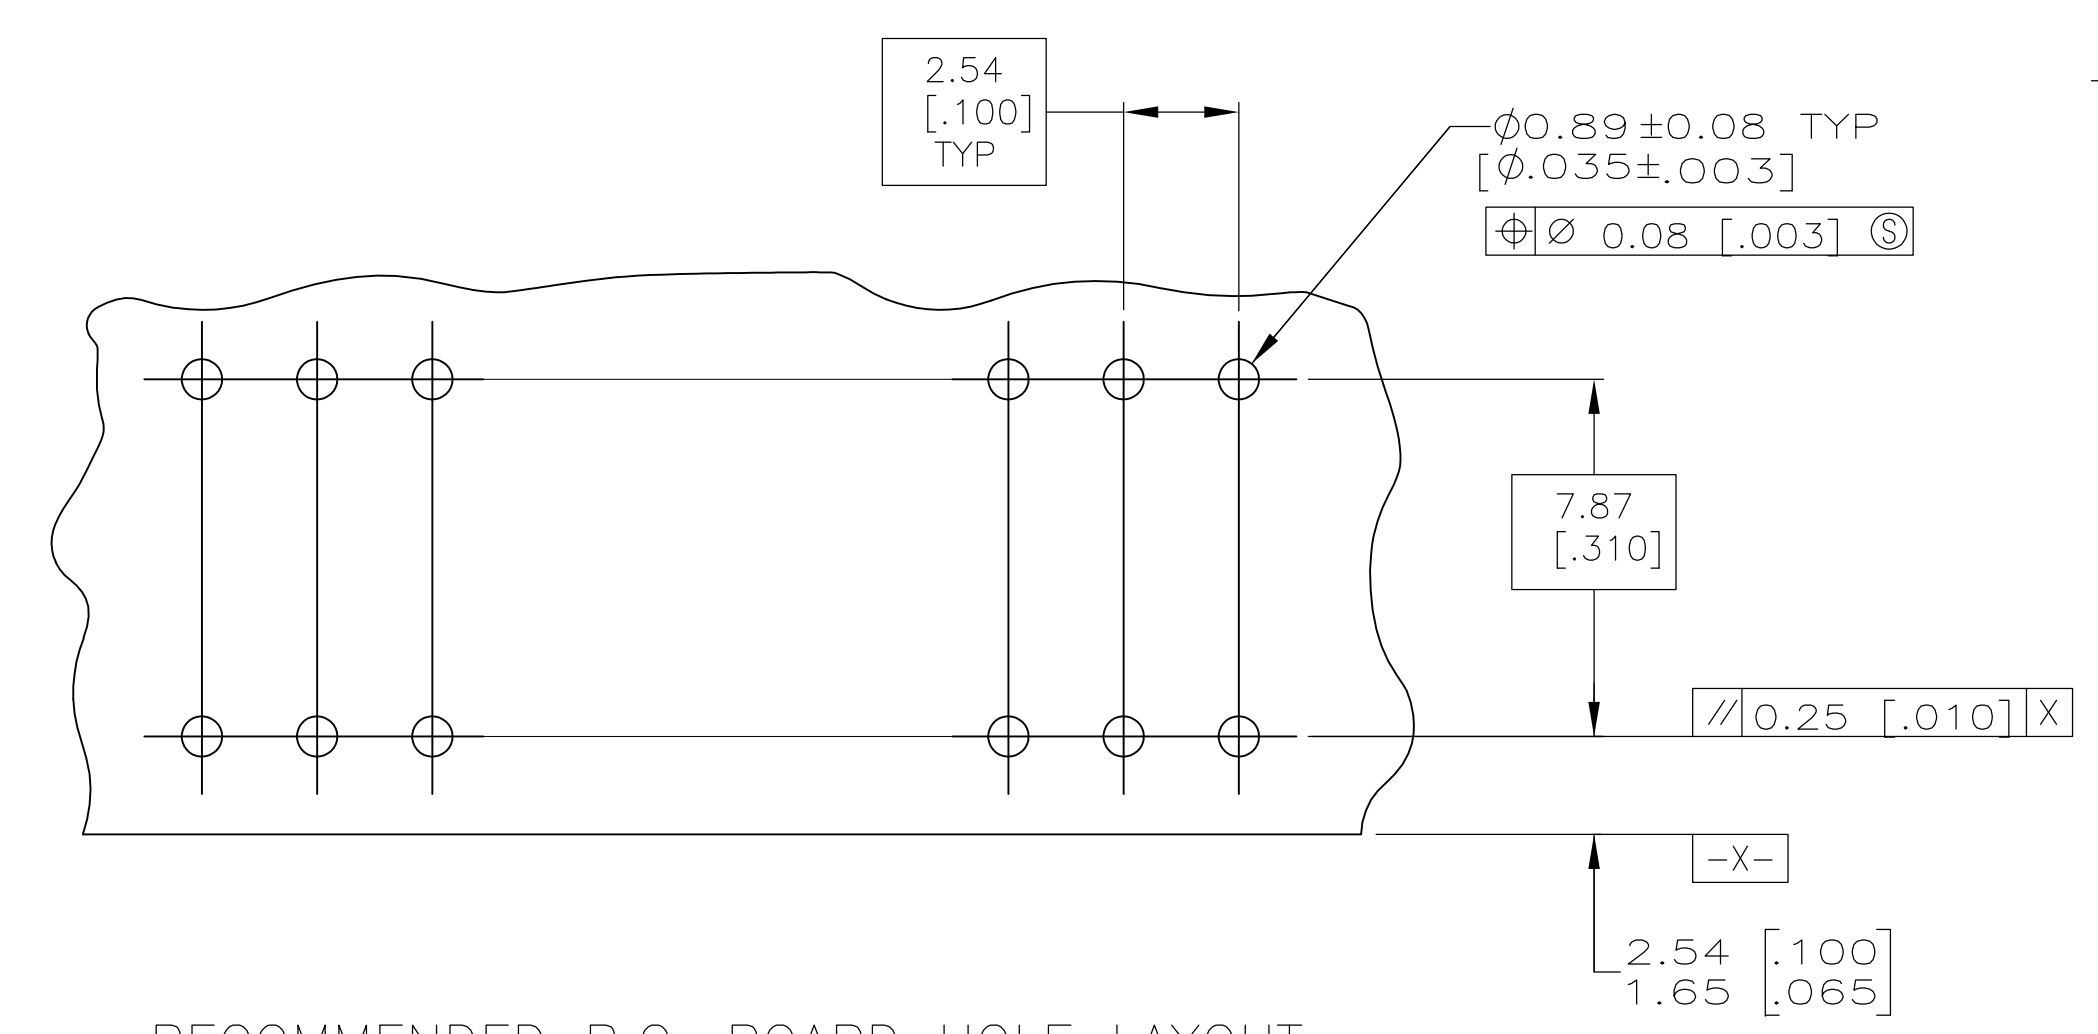
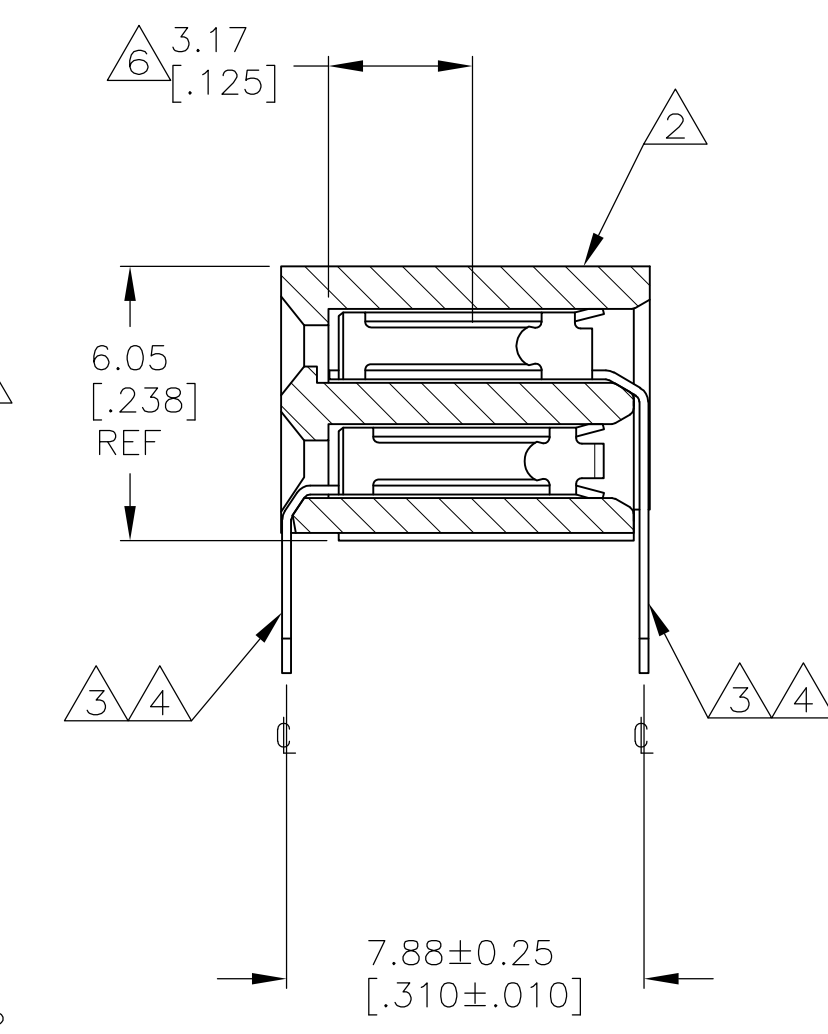
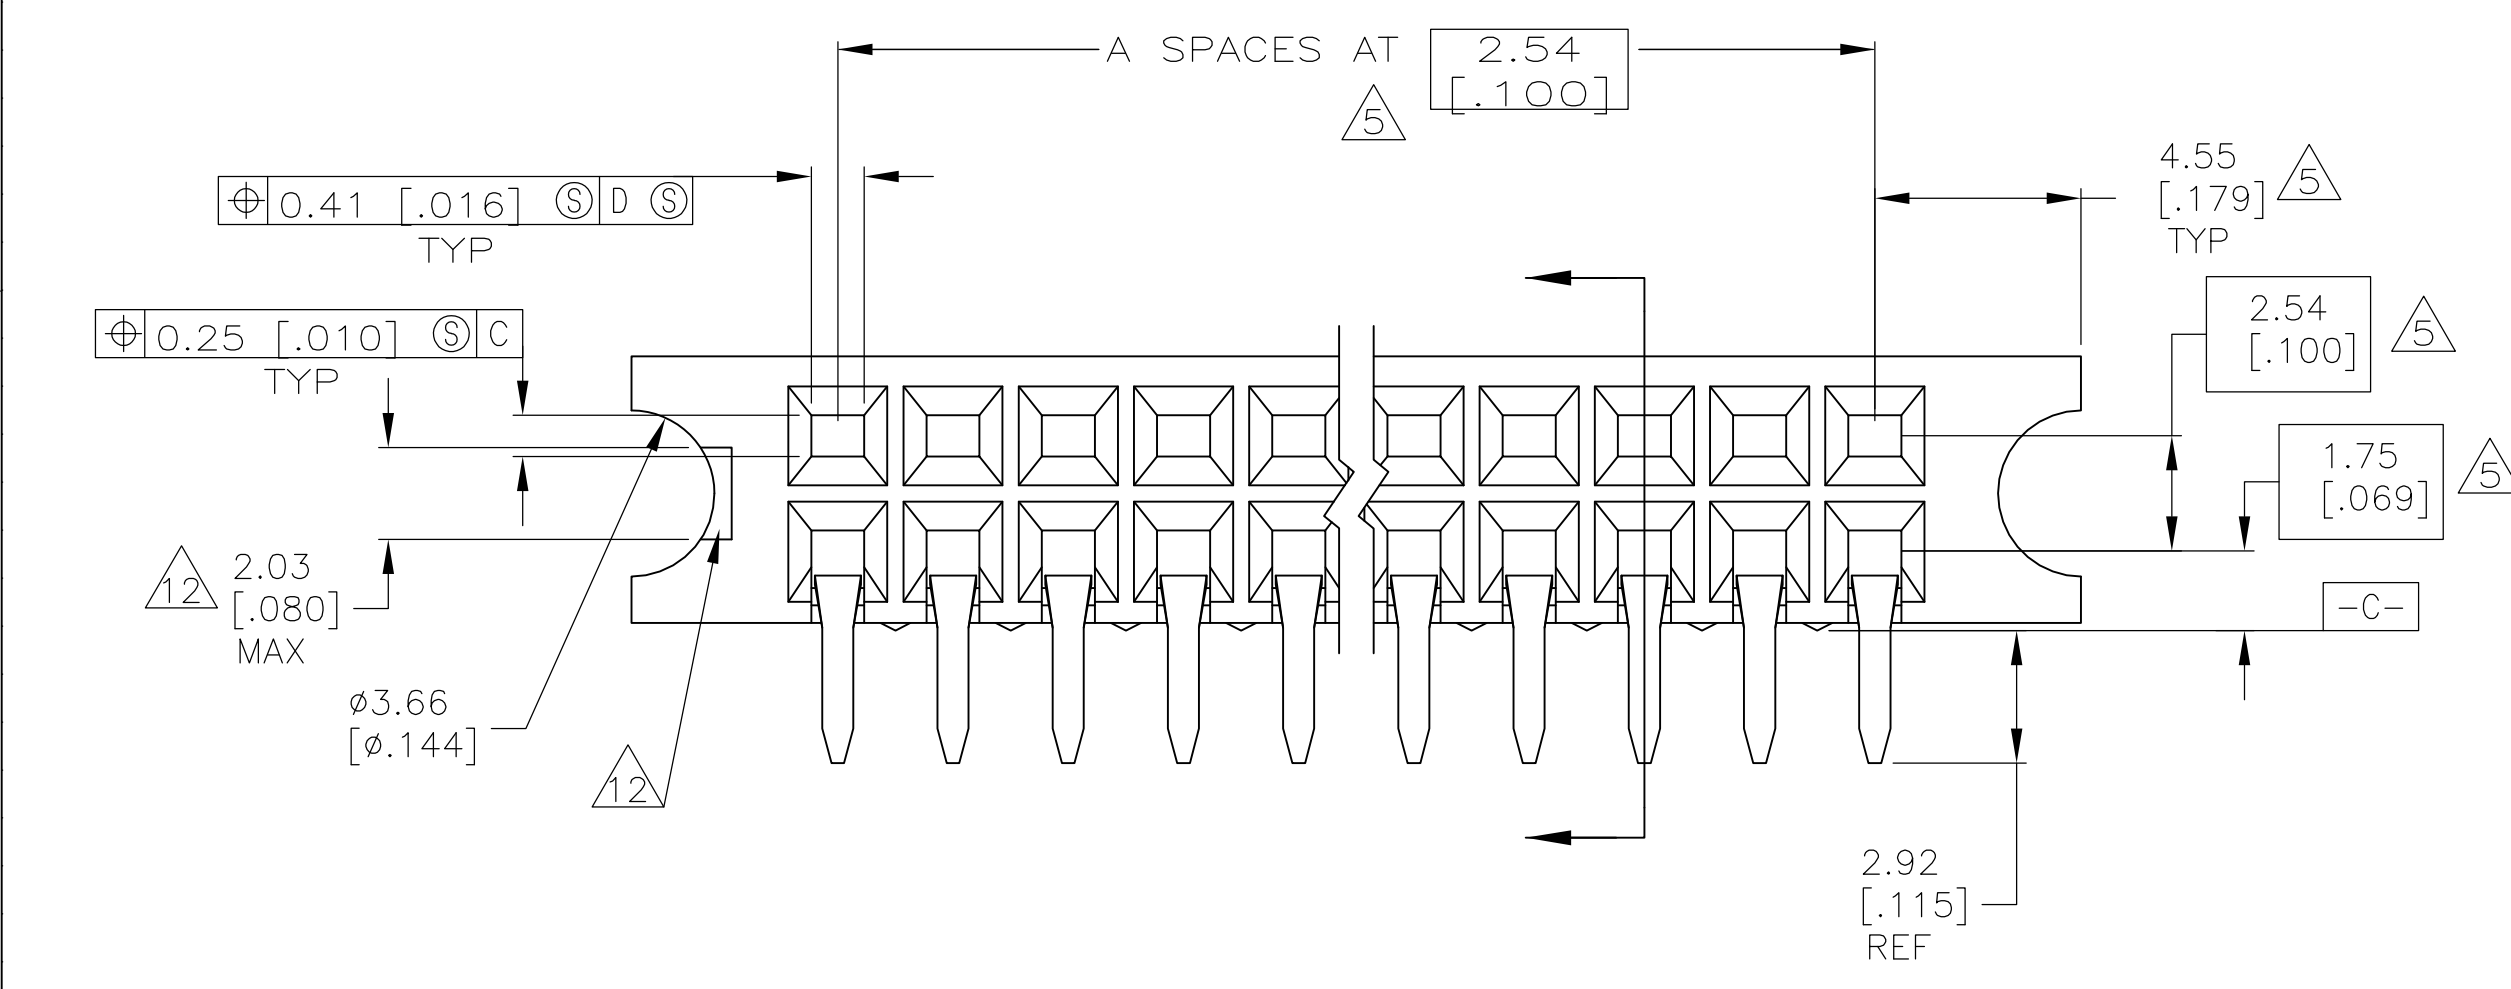


D

C

B

A

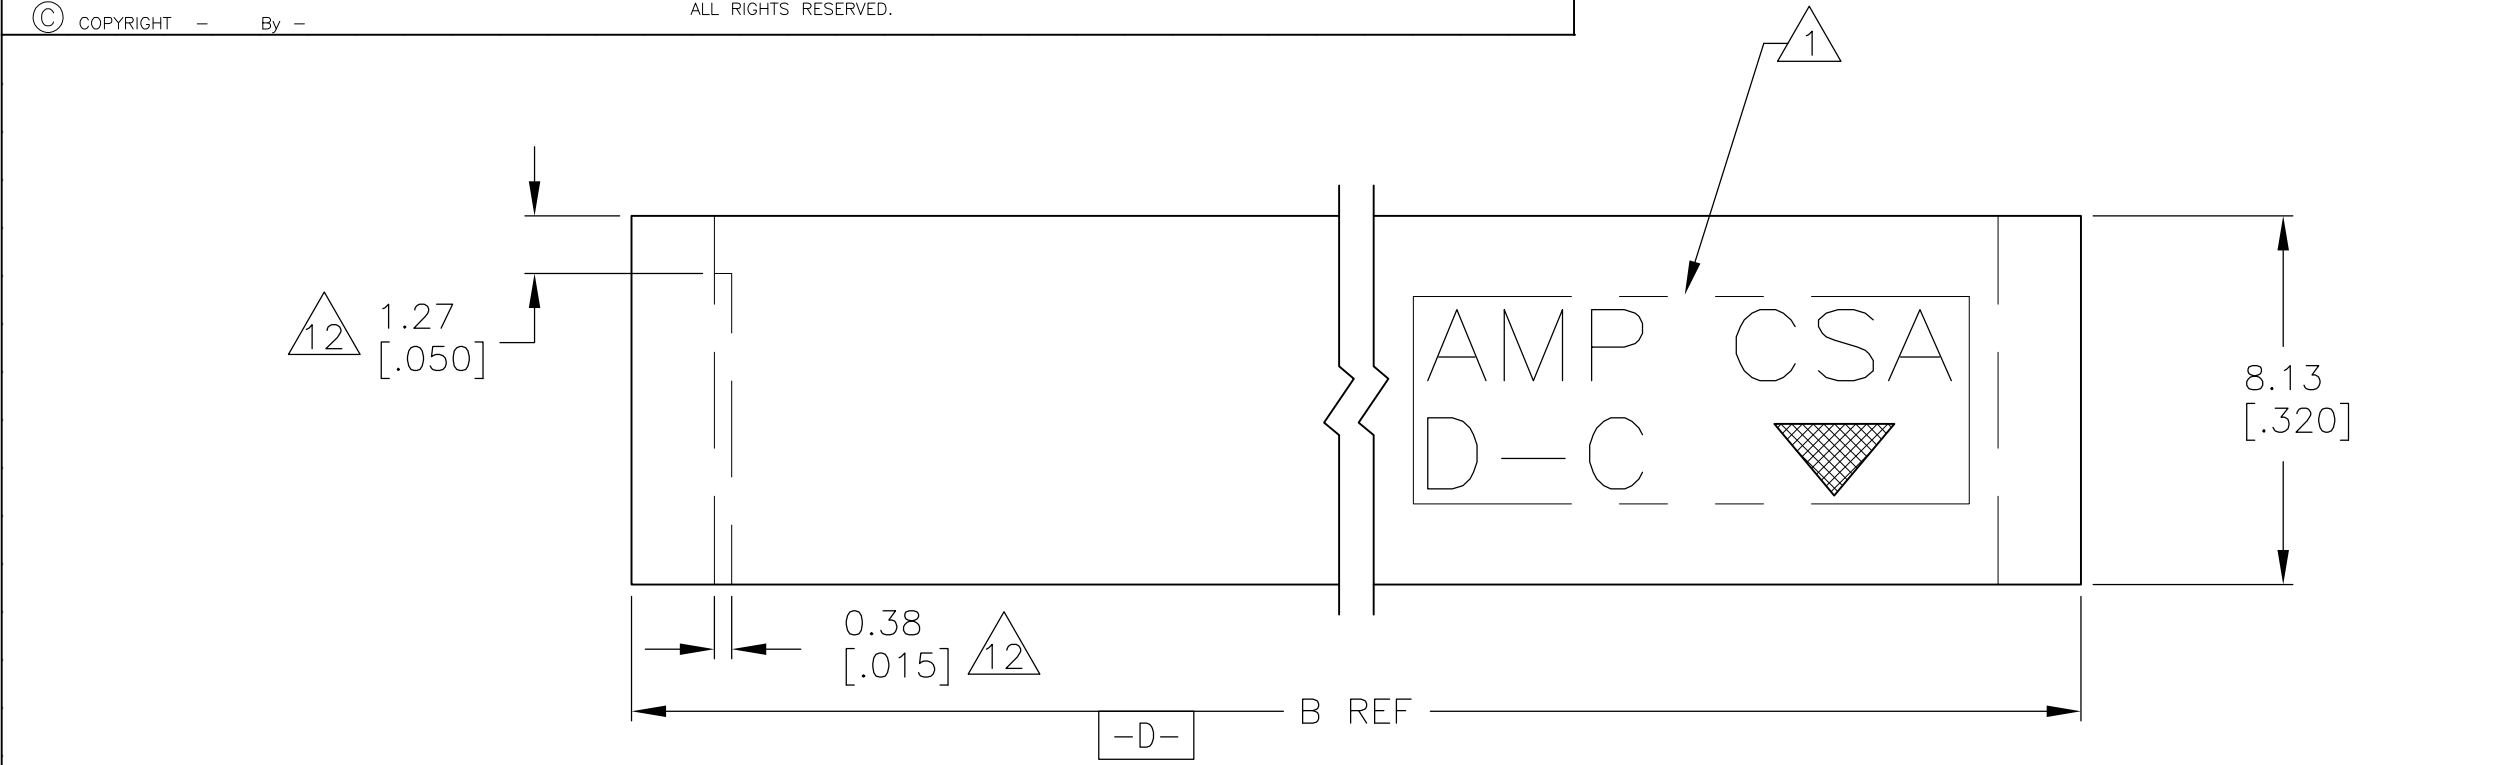

RECOMMENDED P.C. BOARD HOLE LAYOUT

- ① "AMP", "CSA", "▼", AND "DATE CODE" WITH .062 ±015 HIGH CHARACTERS WHERE SIZE PERMITS.
- ② HOUSING: 1-70 POSITION SIZES MAY BE PPS, GLASS-FILLED OR PCT, GLASS-FILLED. POSITION SIZES GREATER THAN 70 WILL BE PPS, GLASS-FILLED.
- ③ CONTACT: PHOSPHOR BRONZE.
- ④ CONTACT FINISH: DUPLEX PLATED 0.00038 [0.00015] GOLD IN CONTACT AREA, 0.00127-0.00254 [0.00050-0.00100] BRIGHT TIN-LEAD ON SOLDER TAILS, ALL OVER 0.00127 [0.00050] NICKEL.
- ⑤ THESE DIMENSIONS PERTAIN TO CAVITY ④'S ONLY, NOT TO CONTACT LOCATIONS.
- ⑥ POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE CONTACT BEAMS).
7. CSA LOGO INK STAMPED WHITE ON HOUSING.
- ⑧ CONTACT FINISH: DUPLEX PLATED 0.00038[0.00015] GOLD IN CONTACT AREA, 0.00127-0.00254[0.00050-0.00100] BRIGHT TIN ON SOLDER TAILS, ALL OVER 0.00127[0.00050] NICKEL.
- ⑨ SUPERSEDED BY 5-532955-1.
- ⑩ ROHS 2002/95/EC COMPLIANT

- | | |
|----|---|
| 11 | CONTACT FINISH: DUPLEX PLATED 0.00038 [.000015] GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] MATTE TIN ON SOLDER TAILS, ALL OVER 0.00127 [.000050] NICKEL. |
| 12 | RECESSED AREA AROUND MOLD GATE IS OPTIONAL. THIS FEATURE IS ALLOWABLE ON EITHER SIDE OF HOUSING OR MAY NOT BE PRESENT AT ALL. |
| 13 | OBSELETE PARTS: OBSELETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.L.CLOUSER/UTA 3/7/91 CHK D SARVER 05-14-91		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P L C ± - 1 P L C ± - 2 P L C ± 0.13 [.005] 3 P L C ± - 4 P L C ± - ANGLES ± -		NAME RECEPTACLE ASSY, MOD II, DBL ROW, 2.54 X 2.54 [100 X .100] CL, GUIDE PIN EARS, CLOSED ENTRY,	
MATERIAL 		FINISH SEE TABLE		SIZE A1	
		WEIGHT -		CASE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C-532955	
				RESTRICTED TO -	
				SCALE 6:1 SHEET 1 OF 1 REV T4	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[532955-4](#)