


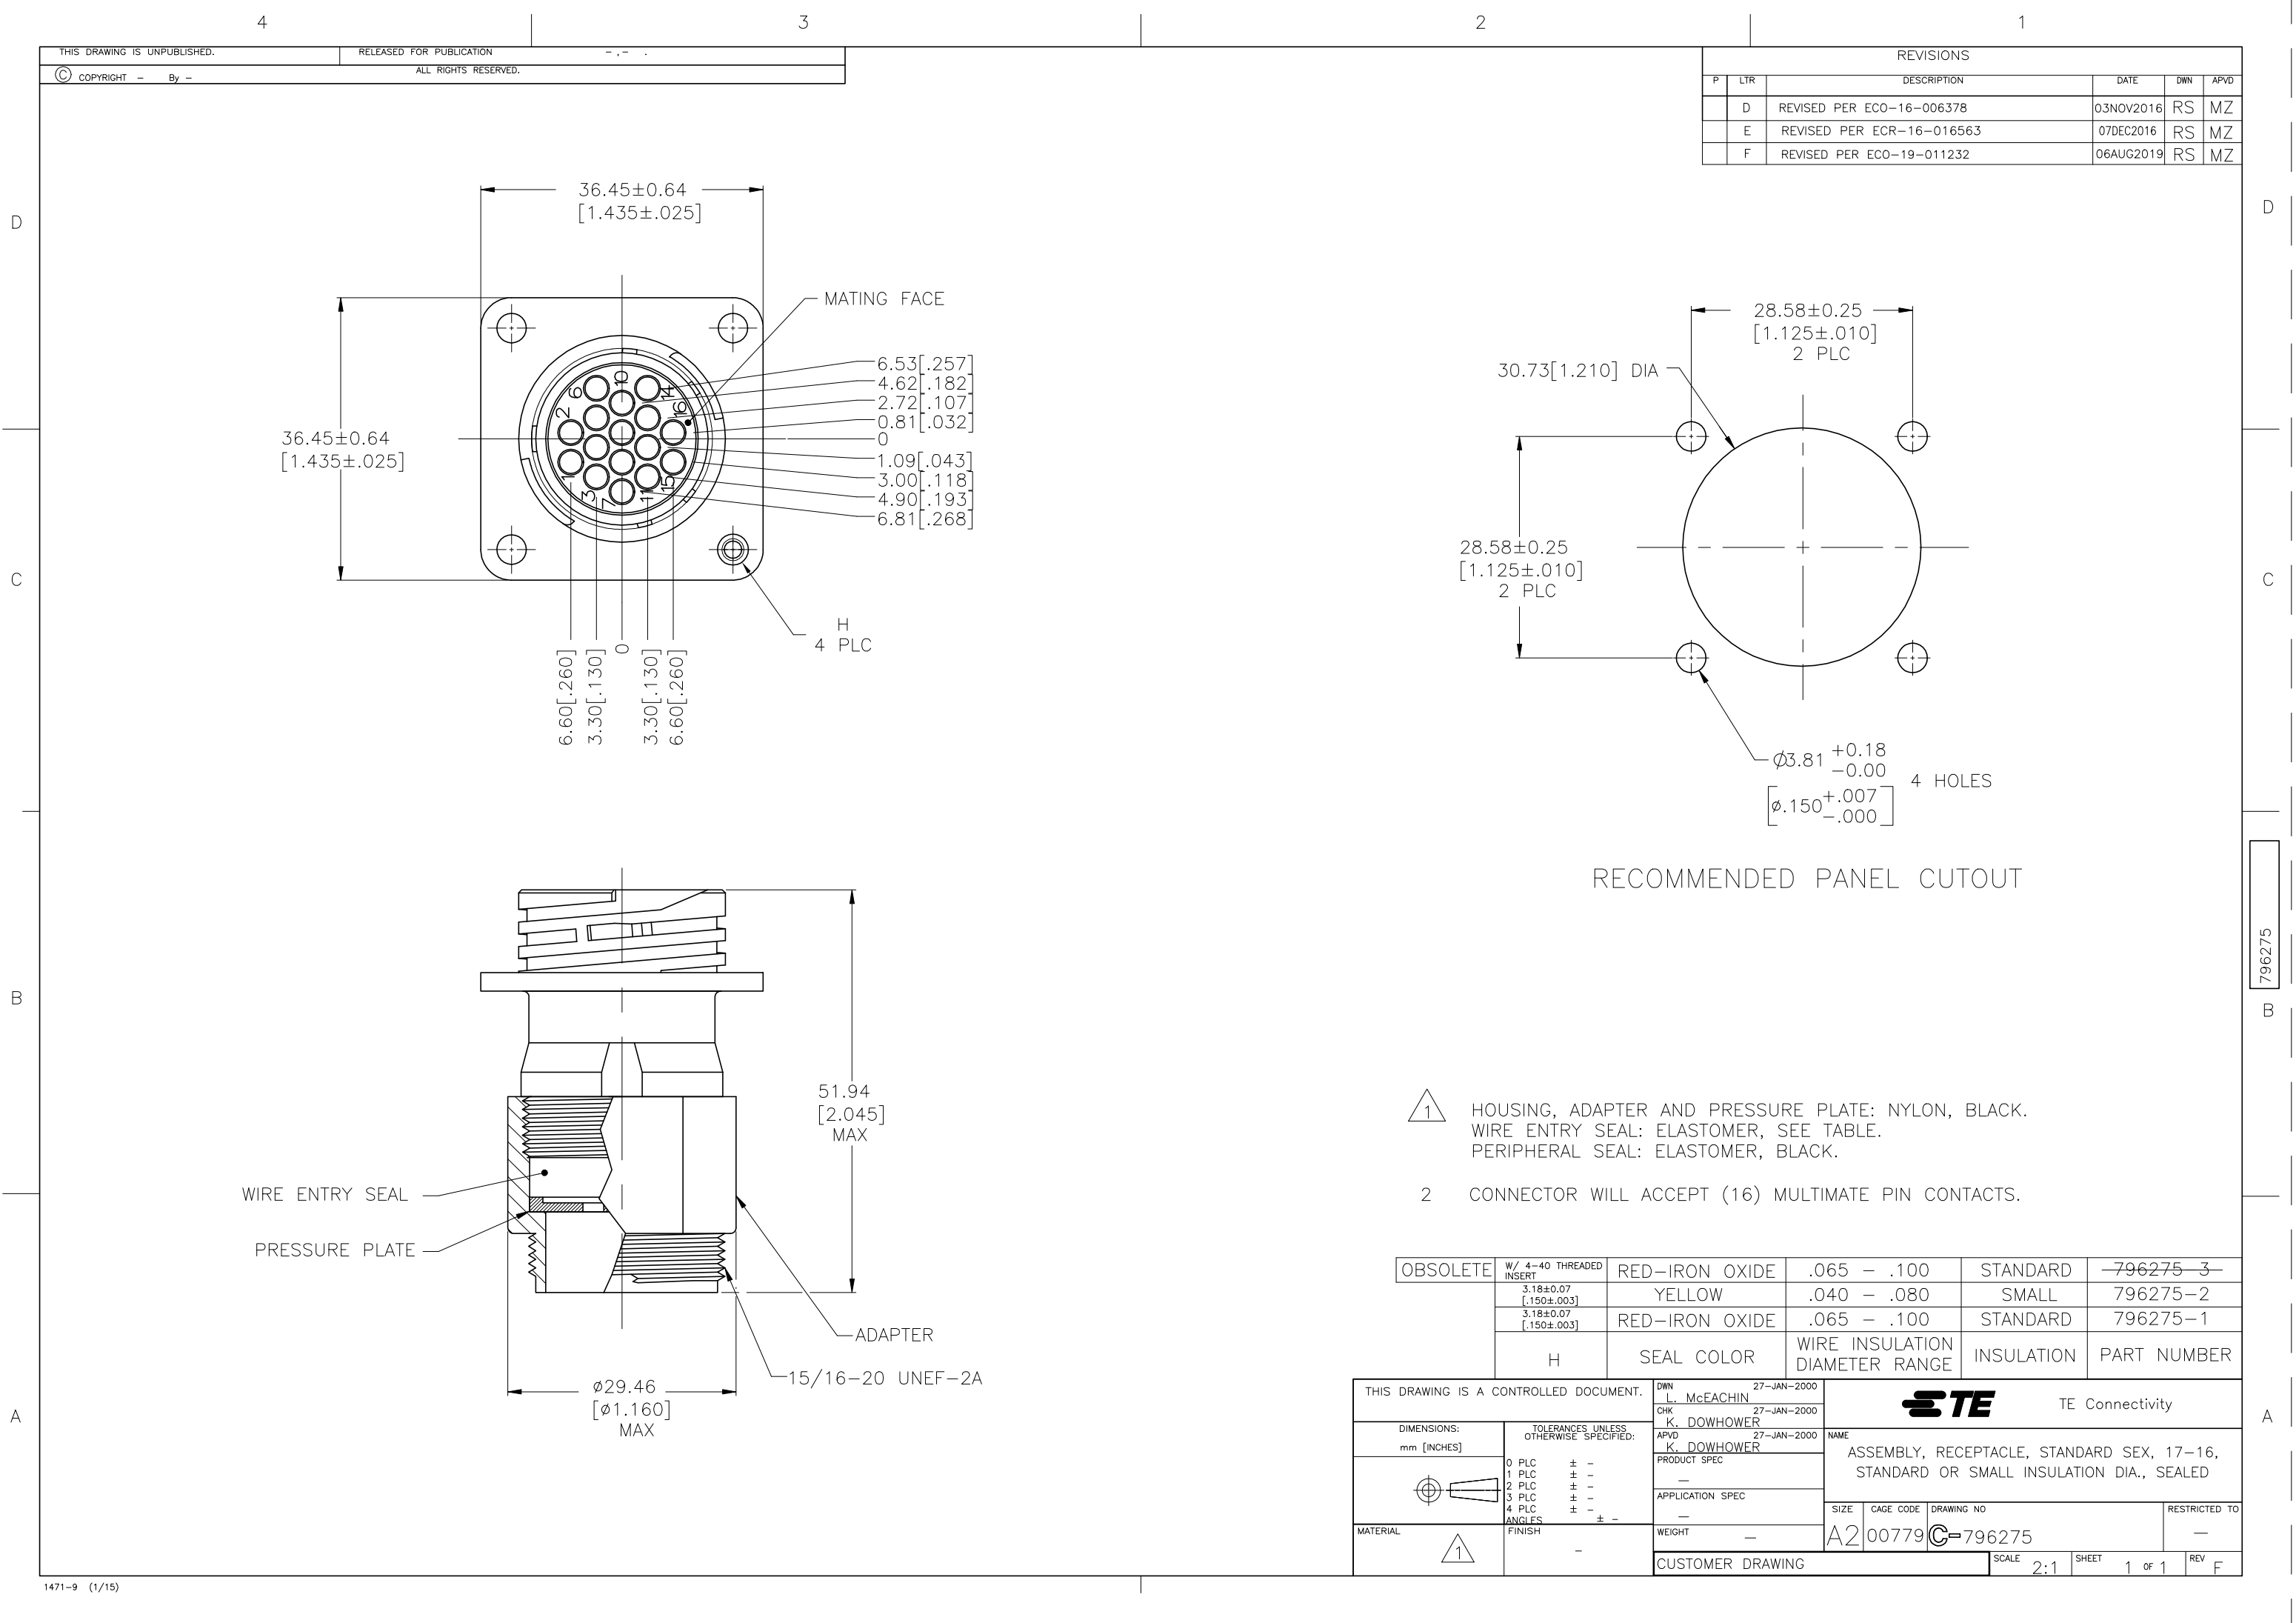

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
D		REVISED PER ECO-16-006378	03NOV2016	RS	MZ
E		REVISED PER ECR-16-016563	07DEC2016	RS	MZ
F		REVISED PER ECO-19-011232	06AUG2019	RS	MZ

- 1 HOUSING, ADAPTER AND PRESSURE PLATE: NYLON, BLACK.
WIRE ENTRY SEAL: ELASTOMER, SEE TABLE.
PERIPHERAL SEAL: ELASTOMER, BLACK.
- 2 CONNECTOR WILL ACCEPT (16) MULTIMATE PIN CONTACTS.

OBSOLETE	W/ 4-40 THREADED INSERT	RED-IRON OXIDE	.065 - .100	STANDARD	796275-3
	3.18 $\pm$ 0.07 [.150 $\pm$.003]	YELLOW	.040 - .080	SMALL	796275-2
	3.18 $\pm$ 0.07 [.150 $\pm$.003]	RED-IRON OXIDE	.065 - .100	STANDARD	796275-1
	H	SEAL COLOR	WIRE INSULATION DIAMETER RANGE	INSULATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. McEACHIN 27-JAN-2000	TE Connectivity		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK K. DOWHOWER 27-JAN-2000	NAME ASSEMBLY, RECEPTACLE, STANDARD SEX, 17-16, STANDARD OR SMALL INSULATION DIA., SEALED		
		APVD K. DOWHOWER 27-JAN-2000			
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC	SIZE A2		
		APPLICATION SPEC			
MATERIAL	FINISH	WEIGHT	CAGE CODE	DRAWING NO	RESTRICTED TO
1	-	-	00779	C=796275	-
CUSTOMER DRAWING			SCALE	SHEET	REV
			2:1	1 OF 1	F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[796275-1](#)