

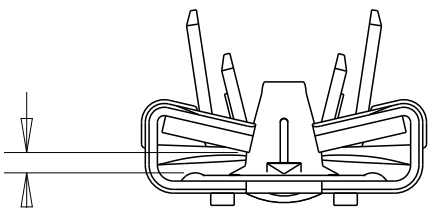
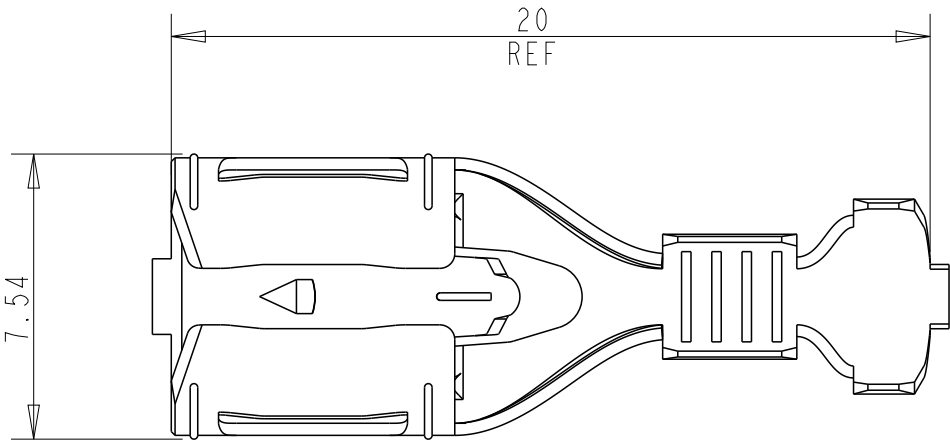


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	ECR-22-144860	06JUL22	DT	EW


NOTES;
1. CONTINUOUS STRIP ON REELS
2. WIRE RANGE: 18-14AWG
INSULATION RANGE: 2.3-3.4mm²




MATING WITH 0.8mm TAB

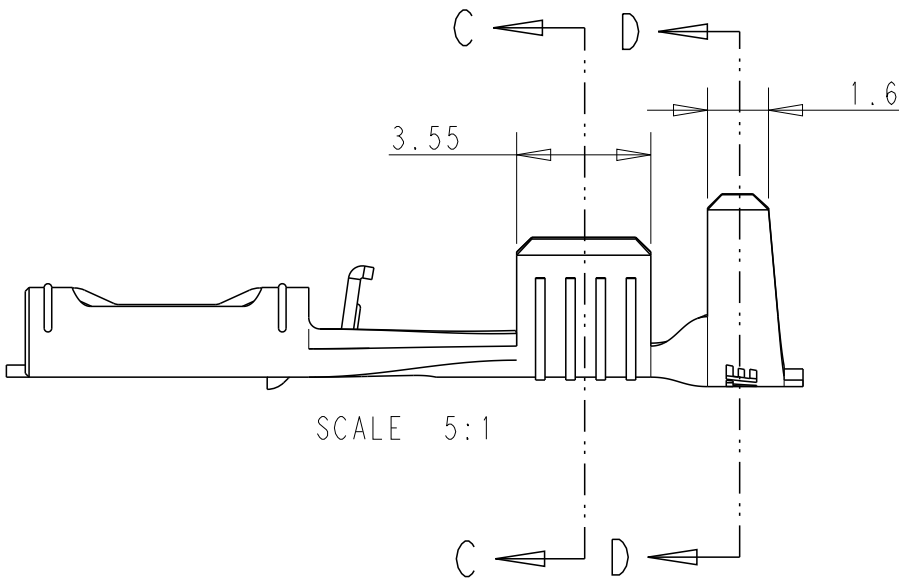

SECTION C-C



SECTION D-D

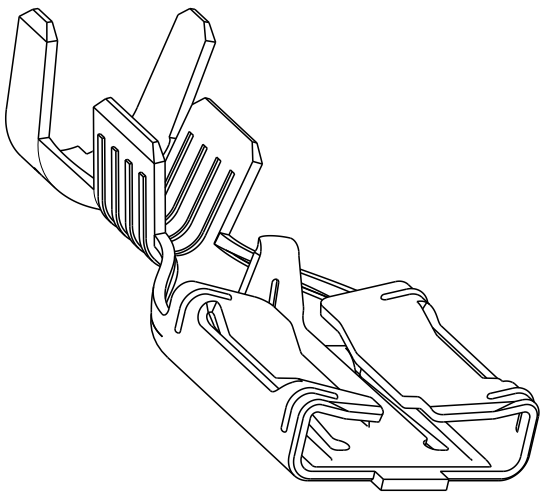

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.3
	1 PLC ±0.25
	2 PLC ±0.2
	3 PLC ±0.2
	4 PLC ±0.2
	ANGLES ±3
MATERIAL	FINISH
-	-
-	-

DWN	06-Jul-22
CHK	06-Jul-22
APVD	06-Jul-22
PRODUCT SPEC	108-106568
APPLICATION SPEC	114-106568
WEIGHT	-
CUSTOMER DRAWING	

THICKNESS	PRE-TIN	BRASS	2379911-1
0.32mm	PLATING	MATERIAL	PN
NAME 250 F-SPRING REC. 18-14 AWG TPBR			
-			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2379911	-
SCALE 5:1		SHEET 1 OF 1	REV A1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2379911-1](#)