

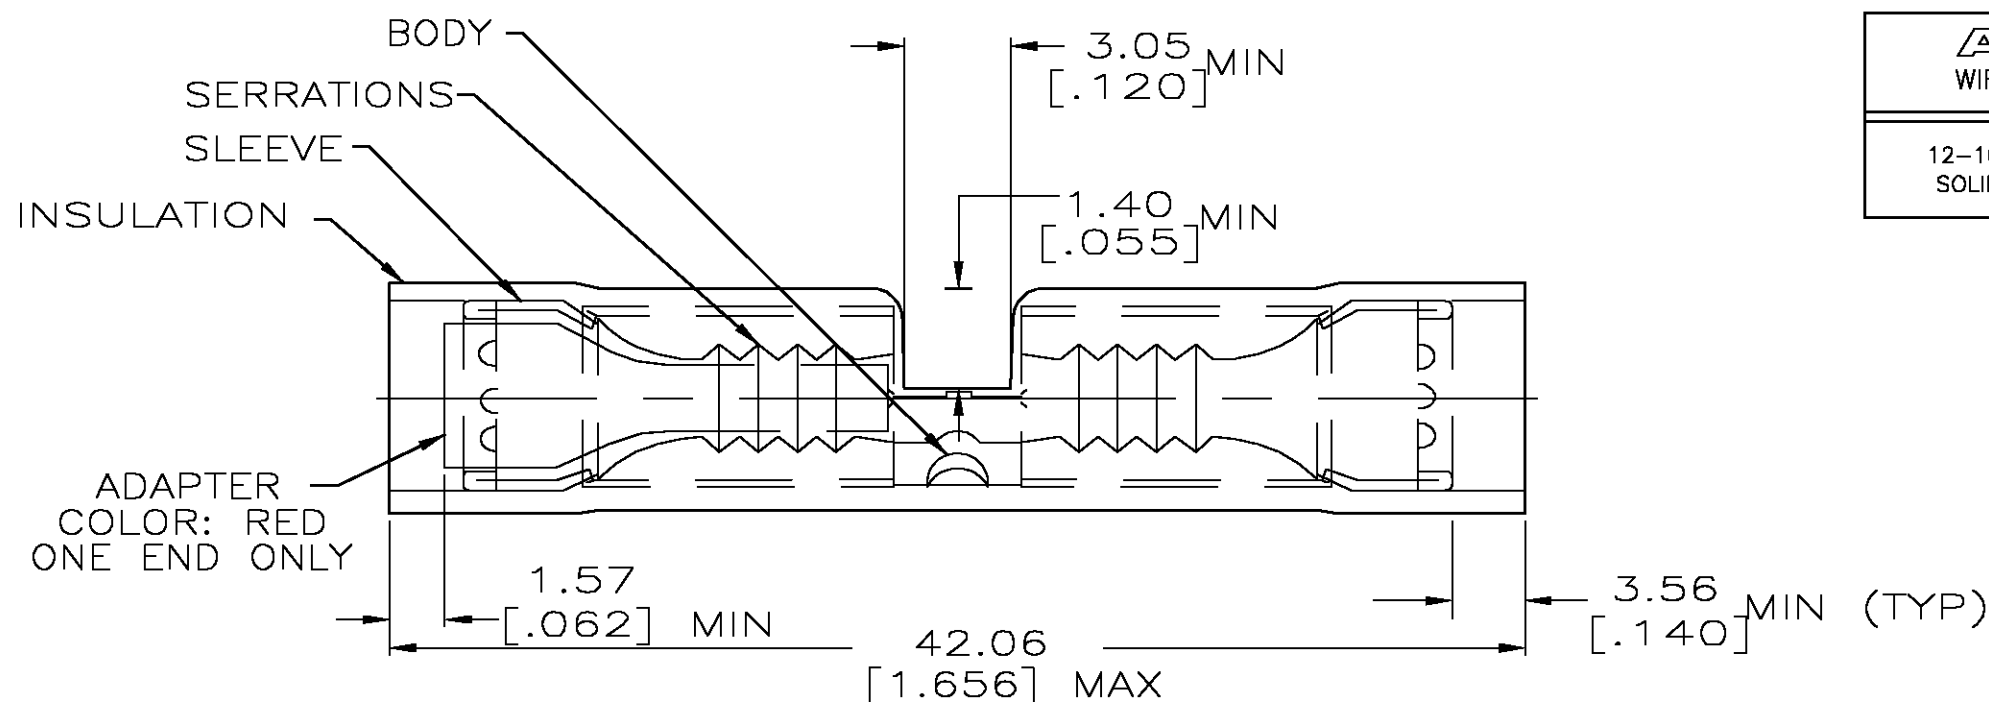
THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
G	14	P	LTR	DESCRIPTION	DATE	APVD
			H1	REV PER 0G3A-0193-05	31MAY05	JR TM

1. WIRE INSULATION DIA 1.52[.060] TO 3.56[.140]
WIRE INSULATION DIA 3.81[.150] TO 5.59[.220]
2. TIN PLATE PER MIL-T-10727
3. PARTS MANUFACTURED AFTER MAY 2005 ARE ROHS COMPLIANT.



AMP WIRE RANGE	 Listed FILE E13288	 LR7189 Certified
12-10 TO 22-16 AWG SOLID OR STRANDED	12-10 TO 22-16 AWG SOLID OR STRANDED	12-10 TO 22-16 AWG SOLID OR STRANDED

50	LOOSE PIECE	327639
QTY	PACKAGE TYPE	PART NO.

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS



FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.MAX RECOMMENDED OPERATING
TEMPERATURE:
105°C [221°F]VOLTAGE RATING:
300V MAXCIRCULAR MIL AREA:
2.62-6.64mm² [5,180-13,100]
0.26-0.96mm² [509-1,900]

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM [INCHES]MATERIAL
COPPER ASTM B-152
NYLON: COLOR-YELLOWTOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± -
2 PLC ± 0.20[.008]
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISHDWN
S.S. GOULDEN 9-28-93
CHK
R. HERSEY 9-28-93
APVD
T. MICHIELUTTI 9-28-93
PRODUCT SPEC
APPLICATION SPEC
WEIGHT

CUSTOMER DRAWING

tyco
ElectronicsTyco Electronics Corporation
Harrisburg, Pa 17105-3608NAME
SPLICE, BUTT, PIDG
WIRE SIZE: 12-10 TO 22-18 AWGSIZE
A3
CAGE CODE
00779
DRAWING NO
C-327639
RESTRICTED TOSCALE
2:1
SHEET
1 OF 1
REV
H1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[327639](#)