

Technical drawing of a cable assembly, showing two views: a side view (top) and a front view (bottom).



Side View (Top):

- Overall length: 22.8
- Crimp area: 6 (with surface texture symbol 1 and 3)
- Crimping range: 4 (with surface texture symbol 2)
- Dimensions: 2.8 $\pm$ 0.1, 4 $\pm$ 0.1, 1 $\pm$ 0.1
- Labels: A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z

Front View (Bottom):


- Overall length: 22.8
- Crimp area: 6 (with surface texture symbol 1 and 3)
- Crimping range: 4 (with surface texture symbol 2)
- Dimensions: 2 $\pm$ 0.5, 0.8 $\pm$ 0.03, 0.2, 8, 12.5, 0.4 (with surface texture symbol 6), 0.1 (with surface texture symbol 1), 0.1 (with surface texture symbol 1), 0.38 $\pm$ 0.05
- Labels: A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z

CUT OFF
max.0.1

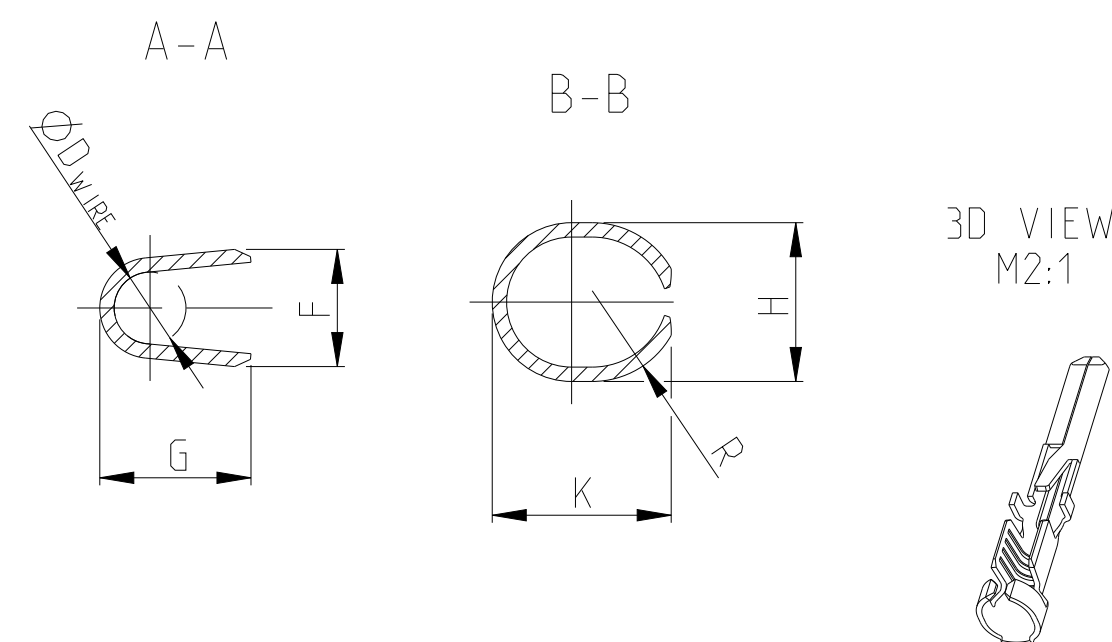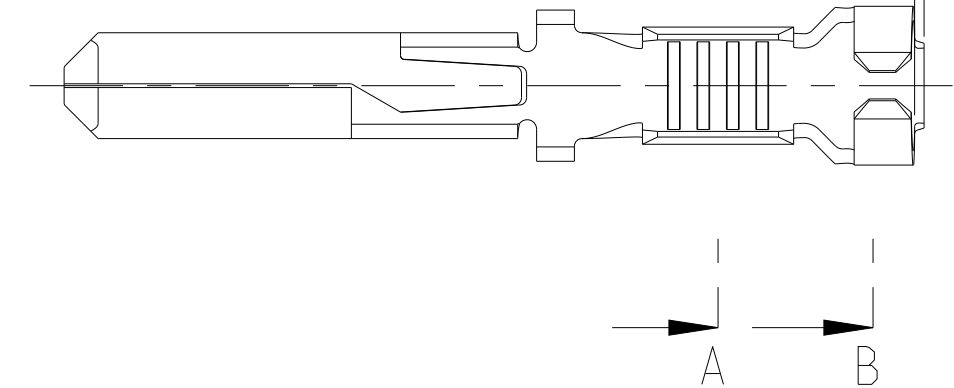

SINGLE WIRE - SEAL/Einzel-Dichtung	N/A	N/A	4.3	4.8	2.8	4.0	3.1	1.7	4.6	5.6	3.6	4.0	3.8	1.7	0.85	0.95	7.5	5.9	3.5	B	Ø3.4	1.0 - 2.5 FLR	PRETINNED min.1µm	CuSn4	 0-965975-5	J	 0-929949-5		
																				B					SEL. GOLD PLATED  1  2	CuZn30	 0-965975-4	J	 0-929949-4
																				A					PLAIN	CuZn30	 0-965975-3	J	 0-929949-3
																				B					PRETINNED min.1µm	CuZn30	 0-965975-2	J	 0-929949-2
																				B					SEL. SILVER PLATED  3	CuZn30	 0-965975-1	J	 0-929949-1
	N/A	N/A	4.3	4.8	2.8	3.0	2.2	1.2	4.6	5.4	3.2	3.0	2.8	1.2	0.9	0.7	7.0	5.4	3.0	B	Ø3.4	0.5 - 1.0 FLR	SEL. GOLD PLATED  1  2	CuSn4	 0-965974-7	A	 0-929948-7		
																				A					PLAIN	CuSn4	 0-965974-6	A	 0-929948-6
																				B					PRETINNED min.1µm	CuSn4	 0-965974-5	J	 0-929948-5
																				A					SEL. GOLD PLATED  1  2	CuZn30	 0-965974-4	J	 0-929948-4
																				B					PLAIN	CuZn30	 0-965974-3	J	 0-929948-3
																			B			PRETINNED min.1µm	CuZn30	 0-965974-2	J	 0-929948-2			
																			B			SEL. SILVER PLATED  3	CuZn30	 0-965974-1	J	 0-929948-1			
UNSEALED / ungedichtet	2-1579001-1 WITH DIE SET: mit Matrize: 1579001-2	N/A	2.5	2.5	1.4	2.2	2.0	0.8	2.8	2.8	1.4	2.2	2.2	0.8	0.65	0.2	5.7	4.1	2.5	B	Ø1.15 - 1.6	0.2 - 0.5 FLR	PRETINNED min.1µm	CuSn4	 0-963962-5	D	 0-963961-5		
																				B					SEL. GOLD PLATED  1  2	CuZn30	 0-963962-4	D	 0-963961-4
																				A					PLAIN	CuZn30	 0-963962-3	D	 0-963961-3
																				B					PRETINNED min.1µm	CuZn30	 0-963962-2	D	0-963961-2
																				B					SEL. SILVER PLATED  3	CuZn30	 0-963962-1	D	 0-963961-1
	539635-1 WITH DIE SET: mit Matrize: 539743-2	878416-0	3.7	3.1	(1.8)	3.0	2.2	1.2	4.1	3.9	1.8	3.0	2.8	1.2	0.65	0.2	6.2	4.6	3.0	B	Ø1.4 - 2.3	0.5 - 1.0 FLR	PRETINNED min.1µm	CuSn4	0-928931-5	P	0-928930-5		
																				B					SEL. GOLD PLATED  1  2	CuZn30	0-928931-4	P	0-928930-4
																				A					PLAIN	CuZn30	0-928931-3	P	0-928930-3
																				B					PRETINNED min.1µm	CuZn30	0-928931-2	P	0-928930-2
																				B					SEL. SILVER PLATED  3	CuZn30	0-928931-1	P	0-928930-1
	169400 WITH DIE SET: mit Matrize: 734262 - 0	878402-0	4.4	3.8	2.3	4.0	3.1	1.8	4.9	4.7	2.6	4.0	3.8	1.8	1.15	0.3	7.2	5.6	4.0	B	Ø1.8 - 2.9	1.0 - 2.5 FLR	PRETINNED min.1µm	CuSn4	0-928794-5	R	0-928781-5		
																				B					SEL. GOLD PLATED  1  2	CuZn30	 0-928794-4	R	 0-928781-4
																				A					PLAIN	CuZn30	 0-928794-3	R	 0-928781-3
																				B					PRETINNED min.1µm	CuZn30	0-928794-2	R	0-928781-2
																				B					SEL. SILVER PLATED  3	CuZn30	 0-928794-1	R	 0-928781-1
	N/A	878227-0	4.8	4.2	2.4	4.0	3.1	1.9	5.3	4.8	3.1	4.0	3.8	1.9	1.15	0.4	7.2	5.6	4.0	B	Ø2.3 - 3.5 RB-Leitung	1.5 - 3 FLR	PRETINNED min.1µm	CuSn4	 0-928924-5	R	 0-927893-5		
																				B					SEL. SILVER PLATED  3	CuSn4	 0-928924-4	R	 0-927893-4
																				A					PLAIN	CuSn4	 0-928924-3	R	 0-927893-3
																				B					SEL. GOLD PLATED  1  2	CuSn4	 0-928924-2	R	 0-927893-2
																				B					PRETINNED min.1µm	CuZn30	 0-928924-1	R	 0-927893-1
N/A	N/A	3.3	3.1	(1.8)	3.0	2.2	1.2	3.65	3.6	2.0	3.0	2.8	1.2	0.65	0.3	6.2	4.6	3.0	B	Ø1.6 - 2.2 RB-Leitung	0.5 - 1.0 FLR	PRETINNED min.1µm	CuSn4	0-928923-5	S	0-927892-5			
																			B					SEL. SILVER PLATED  3	CuSn4	 0-928923-4	S	 0-927892-4	
																			A					PLAIN	CuSn4	 0-928923-3	S	 0-927892-3	
																			B					SEL. GOLD PLATED  1  2	CuSn4	 0-928923-2	S	 0-927892-2	
																			B					PRETINNED min.1µm	CuZn30	0-928923-1	S	0-927892-1	

10 NUMBER OF SERRATIONS: 2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. Konecny 21AUG2006 CHK P.Hasek 60CT2006 APPV S.Vilek 90CT2006		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: FRACTIONAL DECIMAL H0.2768 +H E		NAME PRODUCT GROUP DRAWING FOR 2.8 mm FASTIN-FASTON® TAB	
		1 PLC ± 0.2 2 PLC ± 0.2 3 PLC ± 0.2 4 PLC ± - ANGLES ± 1.5° FINISH			
MATERIAL see table siehe Tabelle		108-18299 APPLICATION SPEC 114-18014 WEIGHT -		SIZE A	
		CUSTOMER DRAWING		CASE CODE 00779	
				DRAWING NO C-1670467	
				RESTRICTED TO	
				SCALE 5:1 SHEET 1 OF 1 REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[928781-2](#)