
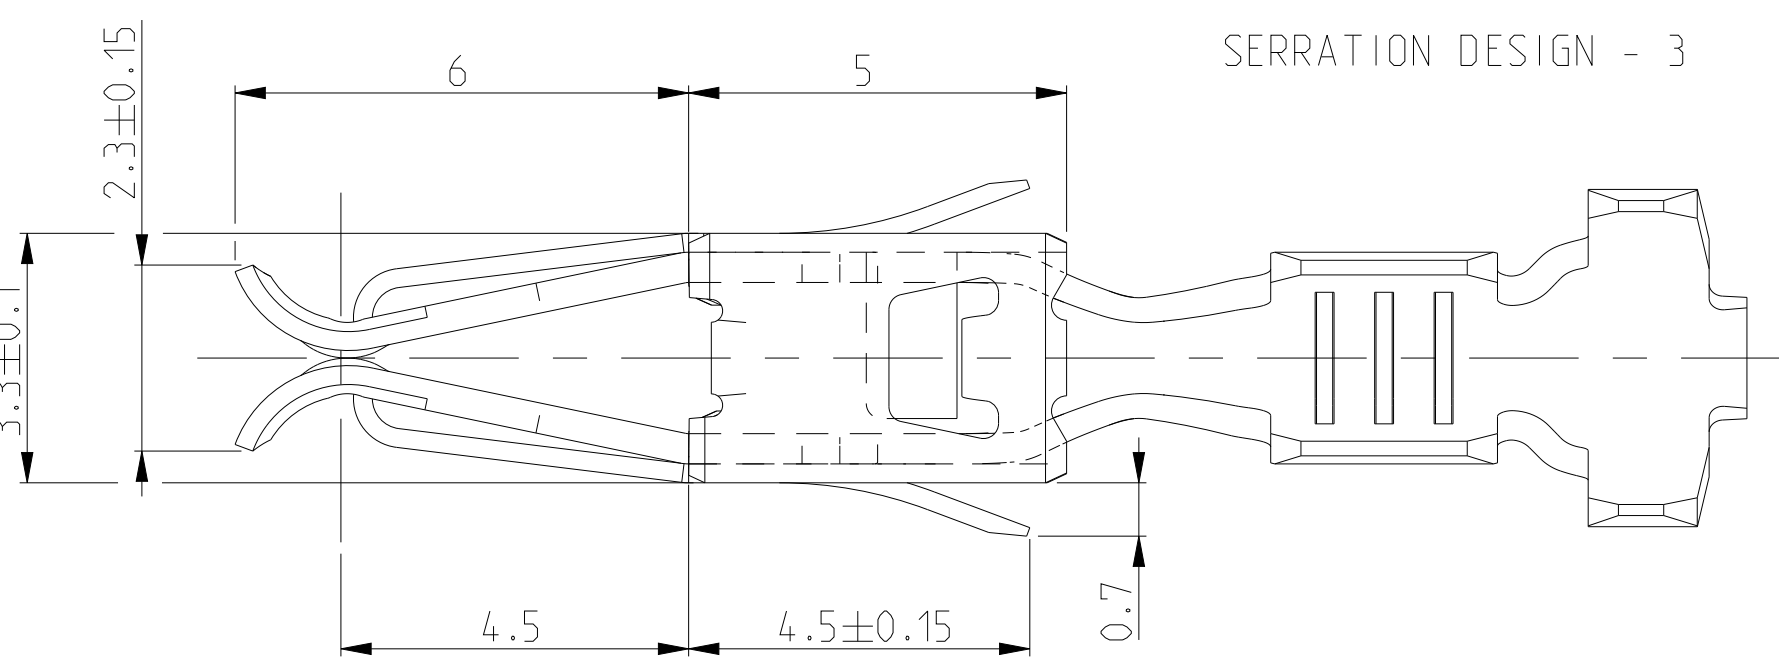
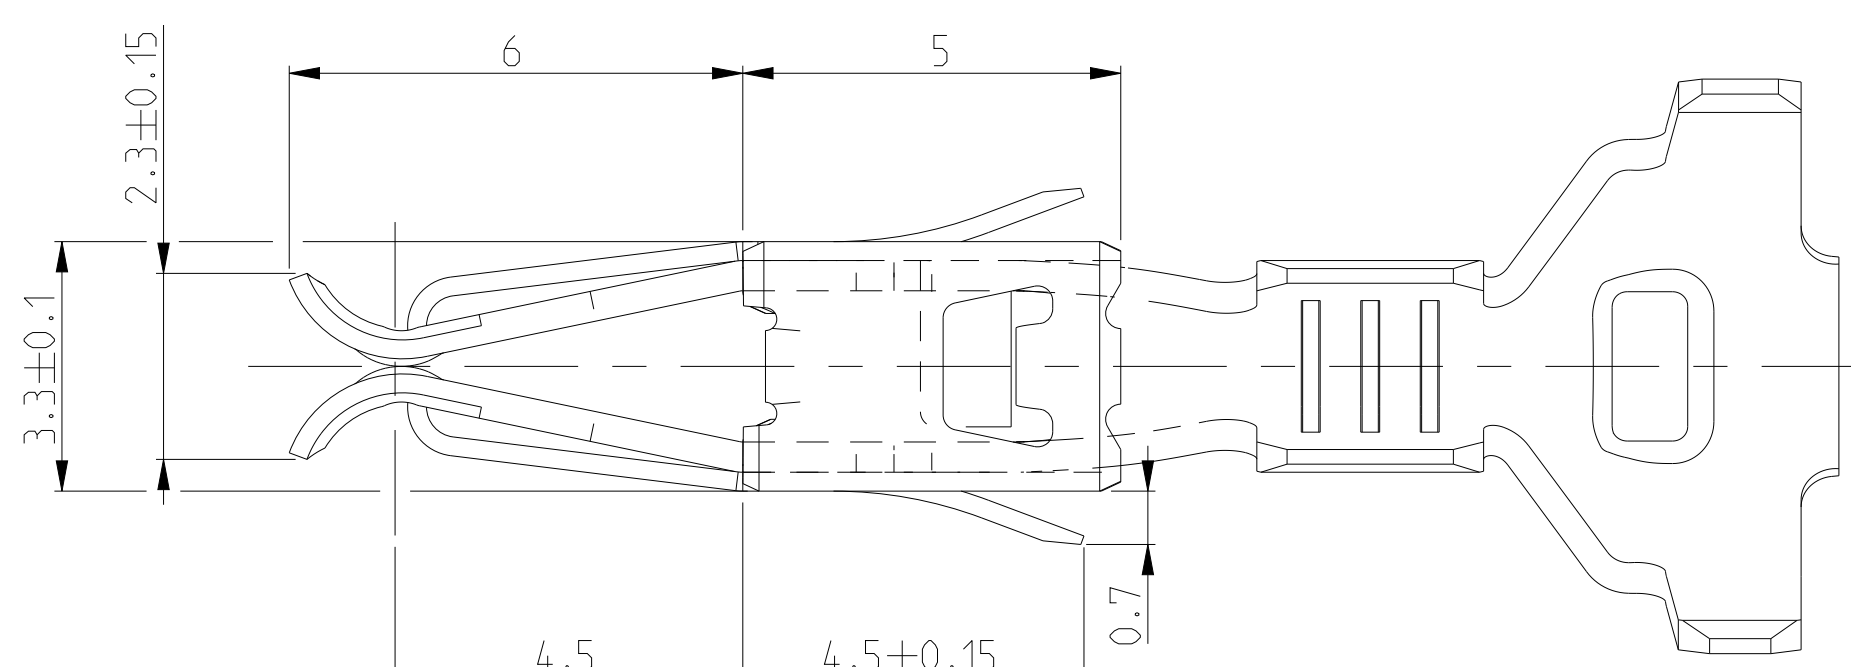


B13

SERRATION DESIGN - 1

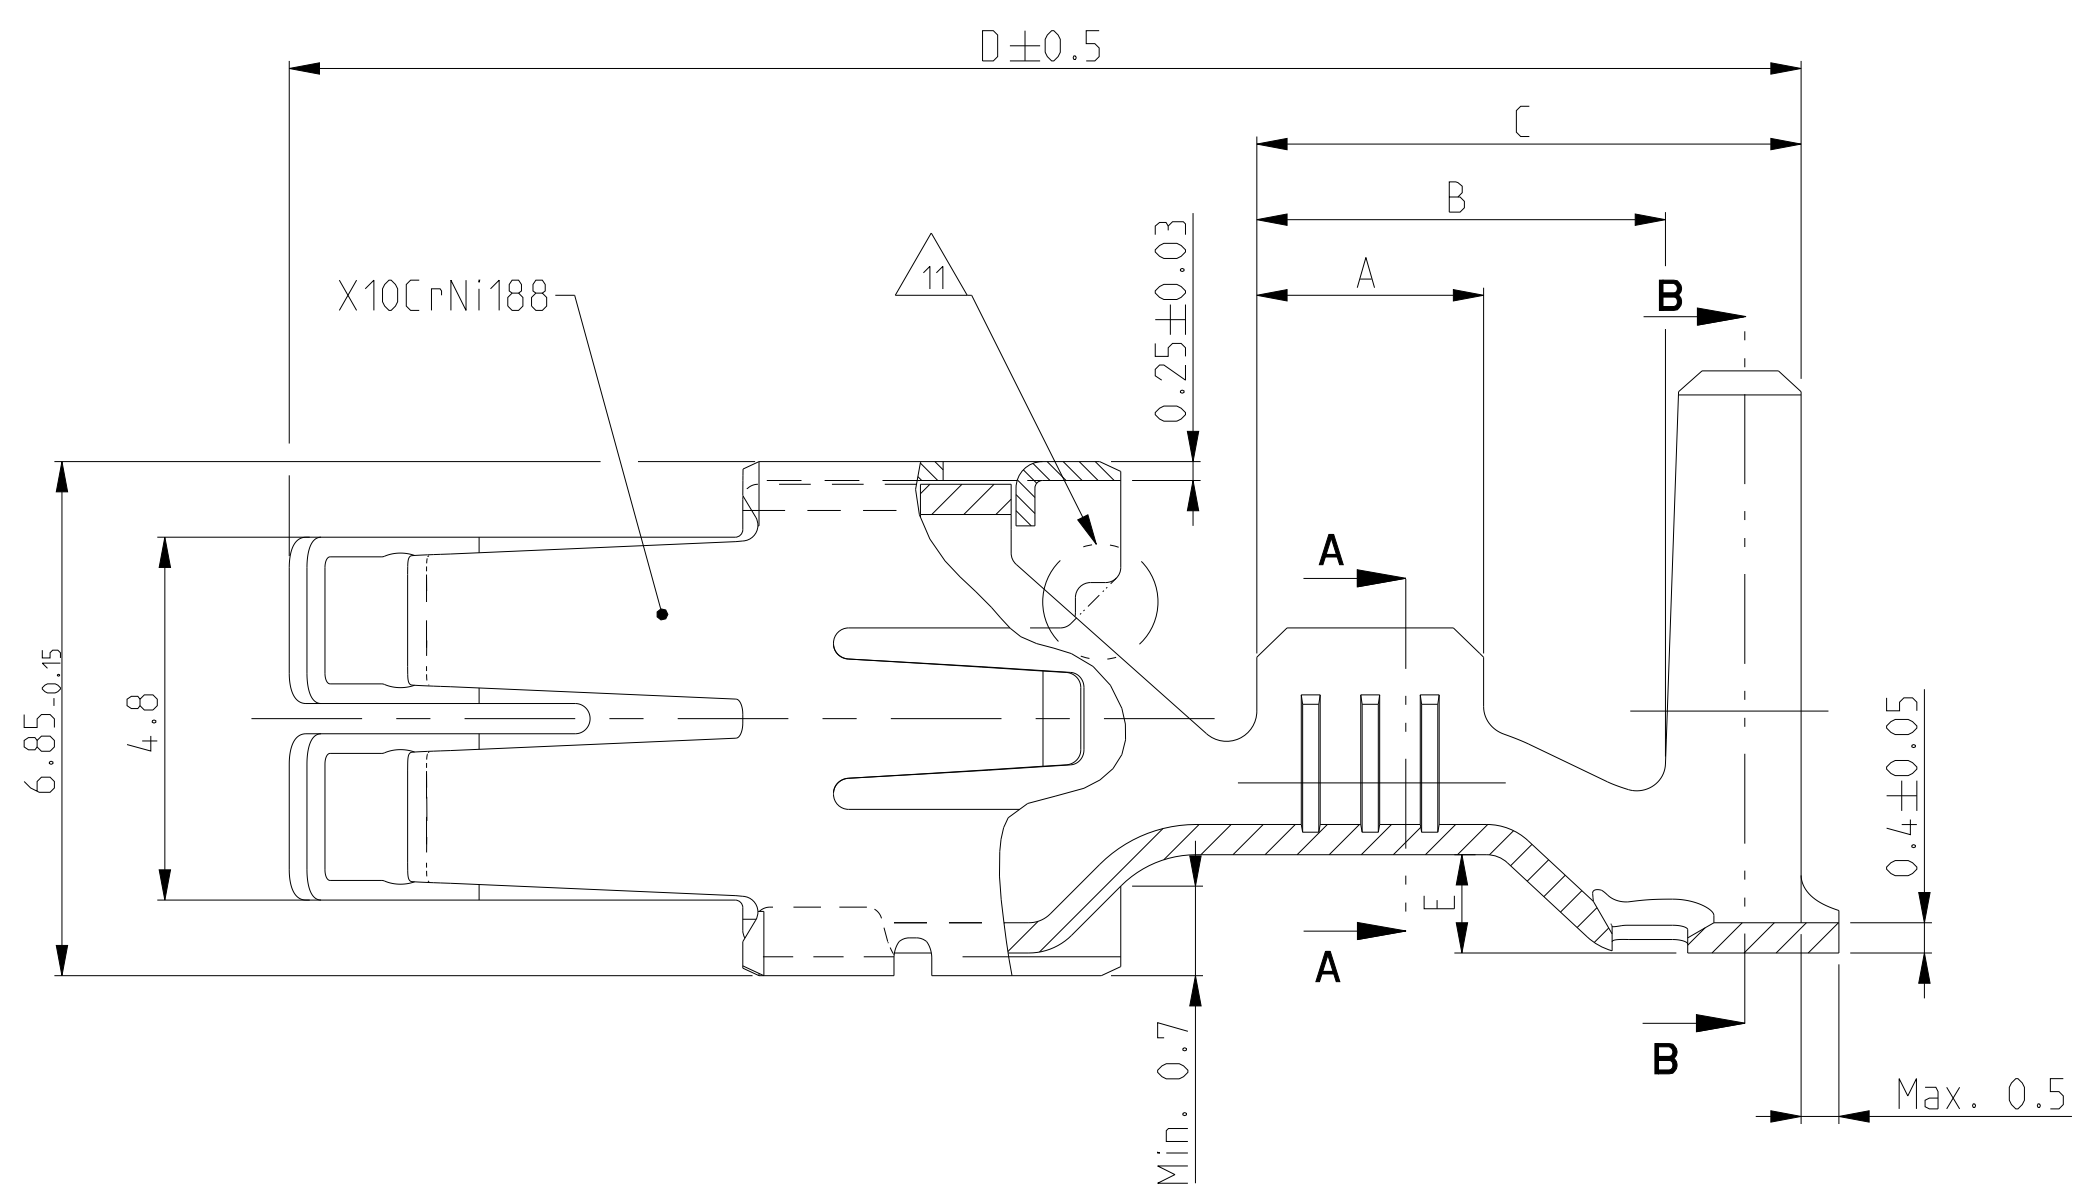

VERSION B
(SINGLE WIRE SEAL/
Einzel-Dichtungs-System)

A


VERSION A

0.35 - 0.5 FLR	E = 2.37 G = 2.45 D ₀ = 0.8	H = 2.8 K = 3.1 D ₀ = 1.4	0.5mm $\varnothing$ = 1.14 0.35mm $\varnothing$ = 1.09 0.5mm $\varnothing$ = 1.14 0.35mm $\varnothing$ = 1.09	MQC- Applicator 2837770-2	-	2.5	3.8	6.6	19.5	 0.3
0.2 - 0.5 FLK	E = 2.2 G = 2.2 D ₀ = 0.8	H = 3.7 K = 3.8 D ₀ = 2.0	0.20mm $\varnothing$ = 1.13 0.25mm $\varnothing$ = 1.15 0.35mm $\varnothing$ = 1.19 0.50mm $\varnothing$ = 1.26	MQC- Applicator 878426-2	539635-1 WITH DIE: mit Matrize 539744-2	2.5	3.8	6.6	19.5	 0.3
0.5 - 1.0 FLK	E = 2.8 G = 3.0 D ₀ = 1.1	H = 4.5 K = 4.7 D ₀ = 2.4	0.5mm $\varnothing$ = 1.38 0.75mm $\varnothing$ = 1.47 1.0mm $\varnothing$ = 1.56	MQC- Applicator 2-541689-2	539733-2 WITH DIE: mit Matrize 734269-0	3	4.2	5.8	19.5	0.4
>1.0 - 2.5 FLK	E = 3.8 G = 4.1 D ₀ = 1.6	H = 5.7 K = 5.8 D ₀ = 3.6	1.5mm $\varnothing$ = 1.76 2.0mm $\varnothing$ = 1.90 2.5mm $\varnothing$ = 2.04	MQC- Applicator 878367-2	539635-1 WITH DIE: mit Matrize 539733-2	3.5	4.7	6.3	19.5	0.4
>2.5 - 4.0 FLK	E = 4.6 G = 4.8 D ₀ = 2.4	H = 6.3 K = 6.6 D ₀ = 4.0	3.0mm $\varnothing$ = 2.13 3.5mm $\varnothing$ = 2.24 4.0mm $\varnothing$ = 2.35	MQC- Applicator 2-878314-2	539635-1 WITH DIE: mit Matrize 539734-2	4	5.2	6.8	19.5	0.6
4.0 - 6.0 FLK	E = 5.2 G = 5.5 D ₀ = 2.9	H = 7.3 K = 7.6 D ₀ = 4.5	4.0mm $\varnothing$ = 2.17 5.0mm $\varnothing$ = 2.36 6.0mm $\varnothing$ = 2.55	MQC- Applicator 2-878738-2	-	4.2	5.6	7.7	20	0.6
									20.4	
0.2 - 0.5 FLR	E = 2.2 G = 2.2 D ₀ = 0.8	H = 2.8 K = 2.8 D ₀ = 1.4	0.2mm $\varnothing$ = 1.13 0.35mm $\varnothing$ = 1.19 0.5mm $\varnothing$ = 1.26	MQC- Applicator 878427-2	-	2.5	3.8	6.6	19.5	 0.3
0.5 - 1.0 FLR	E = 2.8 G = 3.0 D ₀ = 1.1	H = 3.9 K = 4.1 D ₀ = 1.8	0.5mm $\varnothing$ = 1.43 0.75mm $\varnothing$ = 1.52 1.0mm $\varnothing$ = 1.61	MQC- Applicator 878328-2	169400-0 WITH DIE: mit Matrize 734781-1	3	4.2	5.8	19.5	0.4
>1.0 - 2.5 FLR	E = 3.8 G = 4.1 D ₀ = 1.6	H = 4.8 K = 4.9 D ₀ = 2.6	1.25mm $\varnothing$ = 1.69 1.5mm $\varnothing$ = 1.76 2.0mm $\varnothing$ = 1.90 2.5mm $\varnothing$ = 2.04	MQC- Applicator 878356-2	169400-0 WITH DIE: mit Matrize 734251-0	3.5	4.7	6.3	19.5	0.4
>2.5 - 4.0 FLR	E = 4.6 G = 4.8 D ₀ = 2.4	H = 5.5 K = 5.7 D ₀ = 3.3	3.0mm $\varnothing$ = 2.13 3.5mm $\varnothing$ = 2.24 4.0mm $\varnothing$ = 2.35	MQC- Applicator 2-878384-2	169400-0 WITH DIE: mit Matrize 734251-0	4	5.2	6.8	19.5	0.6


VERSION B

0.5 - 1.0 FLR	E = 2.8	H = 7.6	0.5mm ² = 1.43	MQC- Applicator 878337-2	539635-1 WITH DIE: mit Matrize 739736-2	3	5.4	7.2	20	1.25	963243-1 963244-1	100132-1	
	G = 3.0	K = 7.7	0.75mm ² = 1.52										
	D ₀ = 1.1	D ₀ = 5.6	1.0mm ² = 1.61										
>1.0 - 2.5 FLR	E = 3.8	H = 7.6	1.5mm ² = 1.76	MQC- Applicator 878338-2	539635-1 WITH DIE: mit Matrize 539736-2	3.5	5.9	7.7	20	1.25	963244-1 963245-1	100132-1	
	G = 4.1	K = 7.7	2.0mm ² = 1.90										
	D ₀ = 1.6	D ₀ = 5.6	2.5mm ² = 2.04										
>2.5 - 4.0 FLR	E = 4.6	H = 7.6	3.0mm ² = 2.13	MQC- Applicator 878441-2	539635-1 WITH DIE: mit Matrize 539736-2	4	5.9	7.7	20	1.25	963245-1	100132-1	
	G = 4.8	K = 7.7	-										
	D ₀ = 2.4	D ₀ = 5.6	4.0mm ² = 2.35										
>3.0 - 5.0 FLR	E = 4.8	H = 8.15	3.0mm ² = 2.25	MQC- Applicator -	WITH DIE: mit Matrize	4	5.9	7.7	20	1.25	967011-1 963245-1	100132-1	
	G = 5.2	K = 7.8	4.0mm ² = 2.50										
	D ₀ = 2.5	D ₀ = 6.0	5.0mm ² = 2.75										
DB WIRE RANGE (mm ²)	WIRE CRIMP Drhtcrimp	INSUL-CRIMP Isol - crimp	CRIMP HEIGHT Crimp-Höhe	APPLICATION TOOL Anschlag-WKZ	HAND TOOL Handzange	A	B	C	D	E	SINGLE WIRE SEAL Einzelabdichtung	DEAD END PLUG Blindstopfen	TE CONNECTIVITY ORDER - No. 
	SRTIP FORM / Bandware												
	CRIMP DIMENSIONS (mm) Crimpabmessungen (mm)			EXTRACTION TOOL Ausdruckwerkzeug No. 726563-1									

-  PRE-FORM ISO-AREA
ONLY FOR PN: 1241962-
Isoflanken vorgeformt
nur bei PN:1241962-1



- WRAP CRIMP
ONLY FOR PN: 927839,927840,928989 AND 928990
Umfassungsrimp
nur bei PN: 927839,927840,928989 und 928990

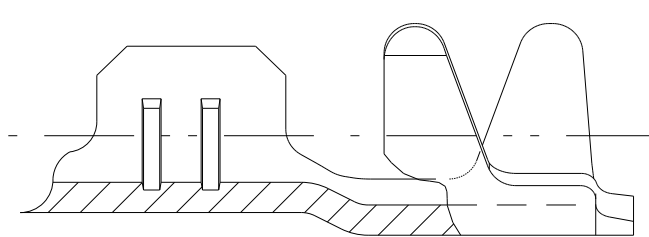

- 9 TRANSITION ONLY FOR PN 927827, 927828, 927829,
 927830, 927833, 927834, 927837 AND 927838
 Übergang nur fuer PN 927827, 927828, 927829,
 927830, 927833, 927834, 927837 und 927838
- 10 1-3 µm Sn28M LAYER FOR HIGHER
 TEMPERATURE REQUIREMENTS
 1-3 µm Sn28M Schicht fuer hoehere
 Temperaturanforderungen
- 11 DOTTED LINE IS ALTERNATIVE SHAPE
 Gestrichelte Linie alternative Form
- 12 OBSOLETE
- 13 SEE APPLICATION SPEC. FOR PREFERRED STANDARD TO MEET NEW REQUIREMENTS
 LV214-2 SLOW MOTION BENDING TEST
 Siehe Verarbeitungs Spezifikation fuer bevorzugten Standard um den neuen
 Anforderungen der LV214-2 Slow Motion Pruefung zu genuegen

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[927829-5 \(Cut Strip\)](#) [927829-2 \(Loose Piece\)](#)