
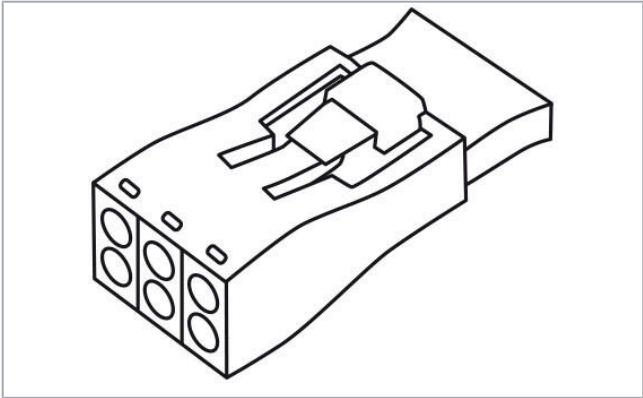


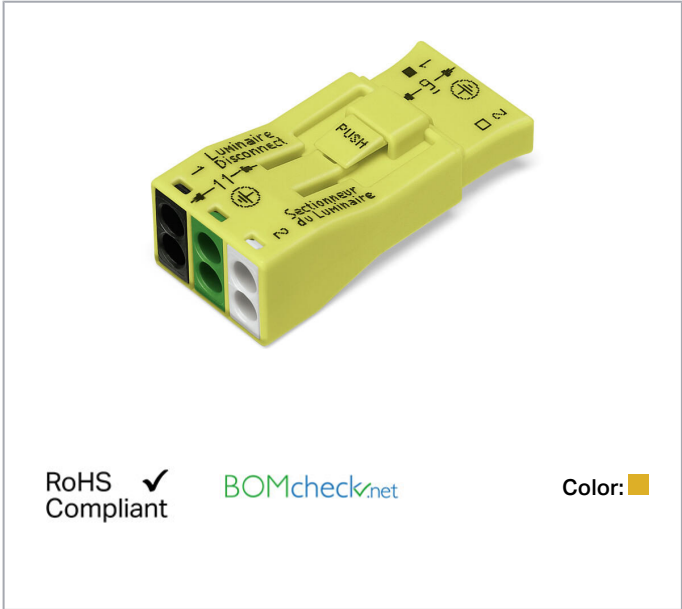

Data
Electrical data

Ratings per IEC/EN

Ratings per	EN 60998
Nominal voltage (II/2)	400 V
Rated surge voltage (II/2)	4 kV
Rated current	6 A
Ratings per	EN 61984

Connection data

Connection type (1)	Plug
Connection technology	PUSH WIRE®
Actuation type	Push-in
Connectable conductor materials	Copper
Solid conductor	0.75 ... 4 mm² / 16 ... 12 AWG
Stranded conductor	1.5 ... 2.5 mm² / 16 ... 12 AWG

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Strip length	11 ... 13 mm / 0.43 ... 0.51 inch
Pole No.	3
Connection type 2	Socket
Solid conductor 2	0.75 mm ² / 18 AWG
Strip length 2	9 ... 11 mm / 0.35 ... 0.43 inch
Total number of connection points	9
Total number of potentials	3

Physical data

Width	19 mm / 0.748 inch
Height	13.2 mm / 0.52 inch
Depth	42 mm / 1.654 inch

Material data

Color	yellow
Fire load	0.144 MJ
Weight	7 g

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
Packaging type	bag
Country of origin	CN
GTIN	4050821857952
Customs tariff number	85366990990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 61984	NTR NL-7390
	CCA DEKRA Certification B.V.	EN 61984	2178521.01
	CCA	EN 60998	2178521.02

Subject to changes. Please also observe the further product documentation!

DEKRA Certification B.V.



	CCA	EN 60998	NTR NL-7391
	DEKRA Certification B.V.		
	CSA	C22.2 No. 182.3	154112 (LR 18677)
	DEKRA Certification B.V.		

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL	UL 2459	E313353
	UL International Germany GmbH		

Downloads Documentation

Bid Text

873-953	2019 Feb 19	xml	Download
X81 - Datei		3.2 kB	
873-953	2019 Feb 21	docx	Download
docx - Datei		15.4 kB	

Additional Information

Technical explanations	2019 Apr 3	pdf	Download
		2.2 MB	

CAD/CAE-Data

CAE data

ZUKEN Portal 873-953	URL	Download
----------------------	-----	----------

CAD data

Subject to changes. Please also observe the further product documentation!



2D/3D Models 873-953

[URL](#)

[Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 873-953

[URL](#)

[Download](#)

Luminaire disconnect connector; 3-pole; 4,00 mm²; yellow

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.