

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	1.22 ohms ±10%
D.C. RESISTANCE	6-7 @20°C	1.22 ohms ±10%
INDUCTANCE	1-4 10kHz, 100mVAC, Ls	470uH ±10%
SATURATION CURRENT	1-4 20% rolloff from initial	450mA
LEAKAGE INDUCTANCE	1-4 tie(6+7), 100kHz, 100mVAC, Ls	0.5uH typ., 1.0uH max.
DIELECTRIC	1-7 1500VAC, 2 seconds	1500VAC, 1 minute
URNS RATIO	(1-4):(7-6)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Functional insulation only.

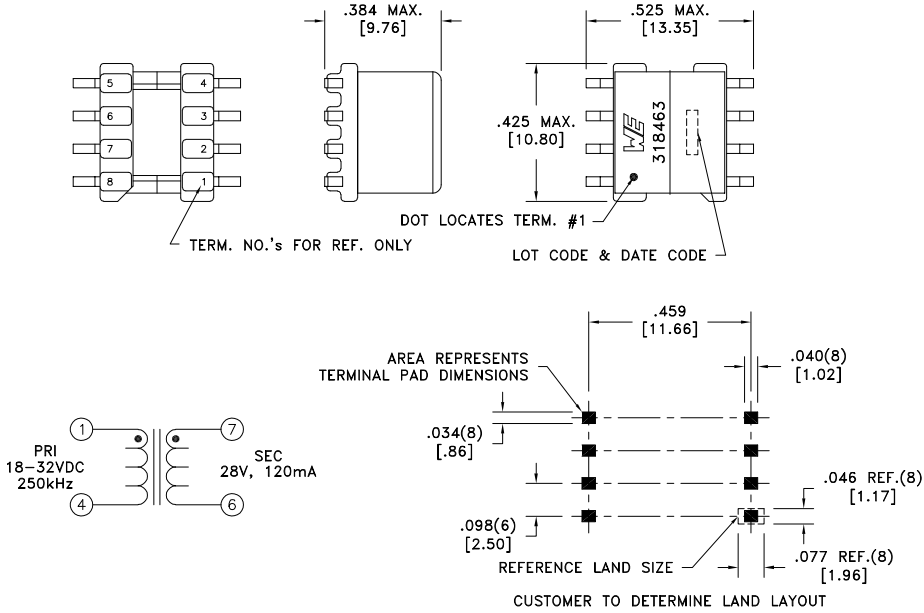

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel		Angles: ±1°	TRANSFORMER	750318463
		PKG-1095		Fractions: ±1/64		
6B	11/19	www.we-online.com/midcom		Decimals: ±.005 [.13]		
6A	8/19	SEE REVISION SHEET FOR REVISION LEVEL		Footprint: ±.005 [.13]	eiSos p/n: 750318463	SPECIFICATION SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[750318463](#)