


REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
C		ECR-20-007705:CORRECT REELING DIRECTION	1JUNE2020	A.L
B1		REVISED PER ECO-17-015614	16OCT2017	R.L



PACKAGE WITHOUT MYLAR

引出し方向
TOP OF REEL
FOR P/N 1565357-1,-3,-4,-5,-9,
5-1565357-3,5-1565357-5

引出し方向
TOP OF REEL
FOR P/N 1565357-6

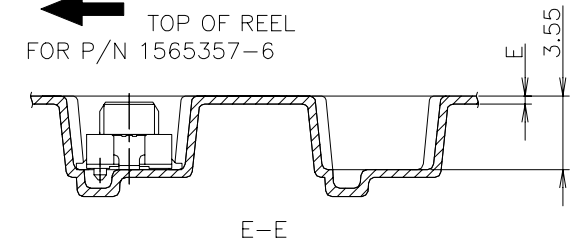

P/N 1565357-6 &-9
have no oval sprocket holes

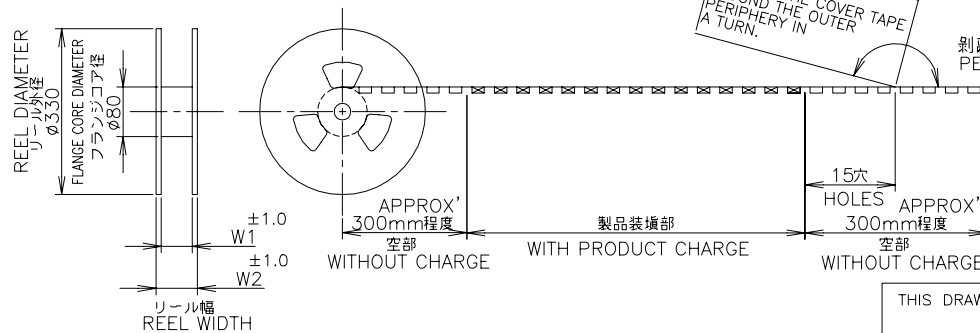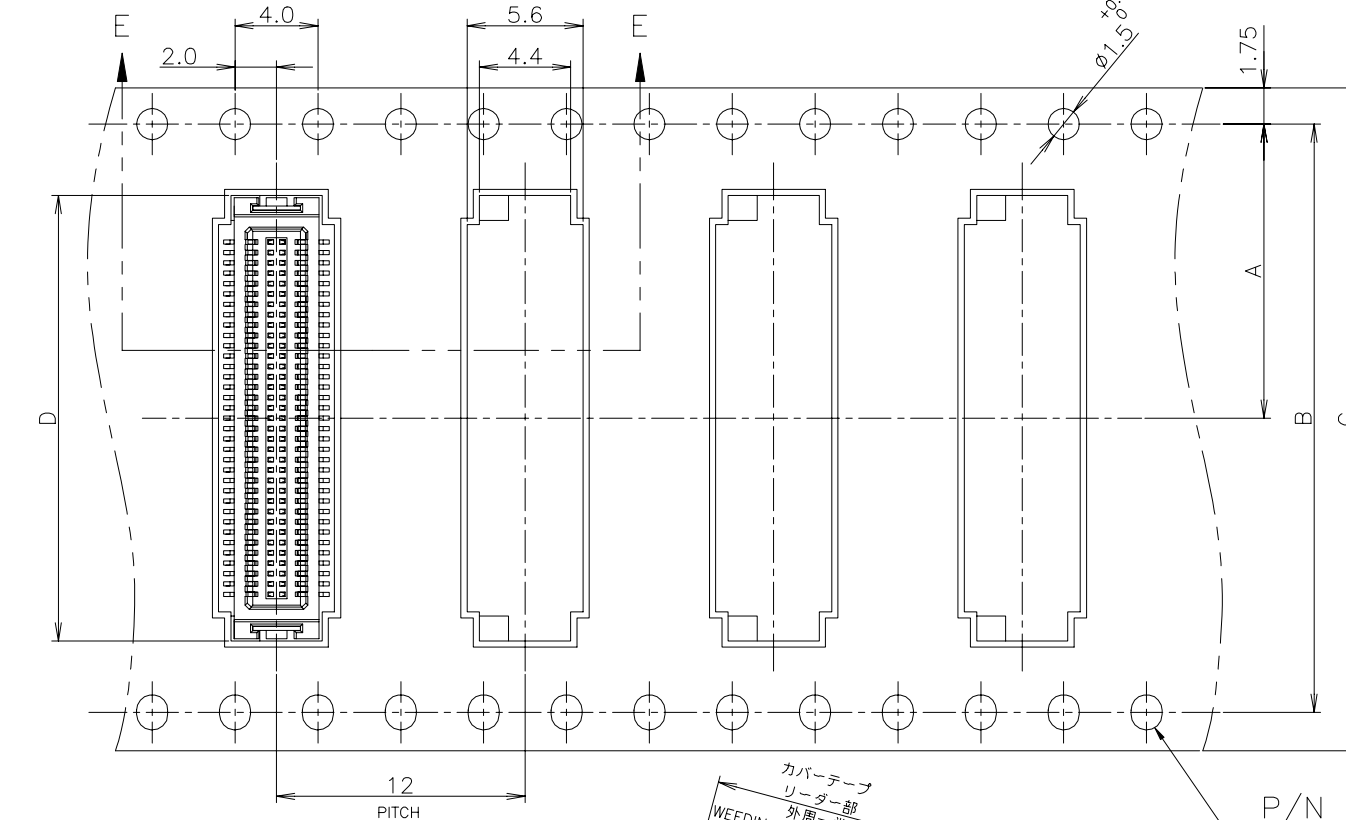

カバーテープ
リーダー部
外周一巻
WEEDING THE COVER TAPE
AROUND THE OUTER
PERIPHERY IN
A TURN.

剥離角度、165°~180°
PEELING ANGLE.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC	± 0.3
1 PLC	± 0.3
2 PLC	± 0.3
3 PLC	± 0.3
4 PLC	± 0.3
ANGLES	± 3°

MATERIAL
材料


FINISH
仕上

INSTRUCTION SHEET 取扱説明書 411-5808		WIRE RANGE 包合電線断面積		INSULATION DIA 被覆外径	
DWN Y.NAKAZAWA 23APR04	CHK T.KUSUHARA 23APR04	TE TE Connectivity Ltd.			
APVD H.MURAMATSU 23APR04	NAME 名称				
PRODUCT SPEC 製品規格 108-5496		ON TAPING (EMBOSS) 0.5mm PITCH FINE MATE CONN. RECEPTACLE ASSEMBLY			
APPLICATION SPEC 取付適用規格		SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
WEIGHT 0		A3	00779	C=1565357	—
CUSTOMER DRAWING				SCALE 尺度	SHEET
				4:1	1 of 3
					REV C

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
—	—	SEE SHEET 1	—	—



PACKAGE WITH MYLAR

引出し方向
TOP OF REEL →

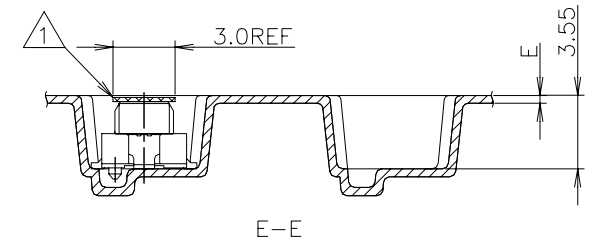

NOTES:

1 POLYIMIDE TAPE FOR PICK AND PLACE.

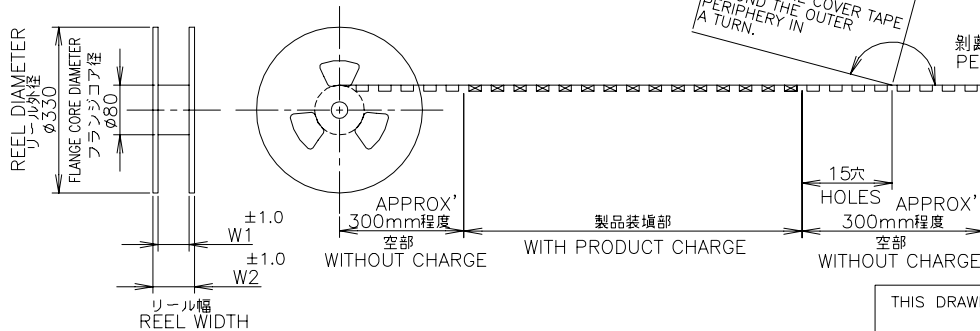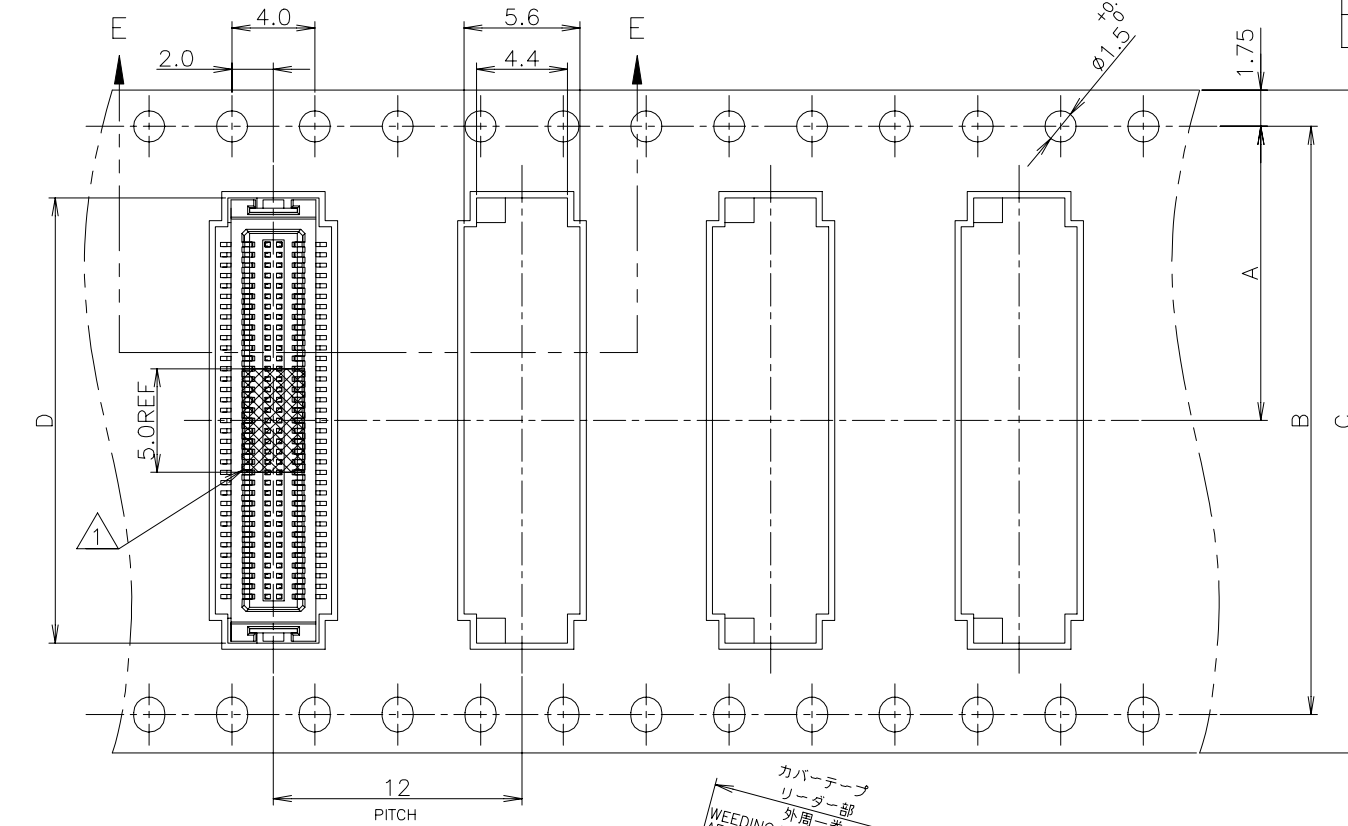

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位: 耗 MM	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
0 PLC	± 0.3
1 PLC	± 0.3
2 PLC	± 0.3
3 PLC	± 0.3
4 PLC	± 0.3
ANGLES	± 3°

MATERIAL 材料	FINISH 仕上
----------------	--------------

INSTRUCTION SHEET 取扱説明書		WIRE RANGE 包合電線断面積		INSULATION DIA 被覆外径		
DWN	 TE Connectivity Ltd.	ON TAPING (EMBOSS) 0.5mm PITCH FINE MATE CONN. RECEPTACLE ASSEMBLY				
CHK						
APVD						NAME 名称
PRODUCT SPEC 製品規格						
APPLICATION SPEC 取付適用規格						
WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C=1565357	RESTRICTED TO		
CUSTOMER DRAWING			SCALE 尺法 4:1	SHEET 2 OF 3	REV C	

FOR P/N 1-1565357-1

REVISIONS					
變更					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

OBSOLETE	WITH BOSS	WITHOUT MYLAR																
			37.5	33.5	0.4	19.1	32	28.4	14.2	1000	60	5	1565358-5	5	1565357-5			
	50.5	45.5	0.4	24	44	40.4	20.2	1000	80	5	1565358-3	5	1565357-3					
OBSOLETE	WITH MYLAR																	
		49.5	45.5	0.38	29.1	44	40.4	20.2	1000	100	1	1565358-1	1	1565357-1				
		20.2	17.5	0.4	9.1	16	11	7.5	1000	20		1565358-9		1565357-9				
	WITHOUT MYLAR																	
		29.5	25.5	0.38	16.6	24	11	11.5	1000	50		1565358-6		1565357-6				
		37.5	33.5	0.38	19.1	32	28.4	14.2	1000	60		1565358-5		1565357-5				
		37.5	33.5	0.4	21.9	32	28.4	14.2	1000	70		1565358-4		1565357-4				
		50.5	45.5	0.4	24	44	40.4	20.2	1000	80		1565358-3		1565357-3				
BOSS	MYLAR	W ₂	W ₁	E	D	C	B	A	QTY/ REEL	POS	CONNECTOR P/N	TAPING P/N						
		DIMENSIONS																

INSTRUCTION SHEET 取扱説明書	WIRE RANGE 抱合電線断面積	INSULATION DIA 被覆外径
----------------------------	-----------------------	------------------------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 單位：耗 MM		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	
		0 PLC	± 0.3
		1 PLC	± 0.3
		2 PLC	± 0.3
		3 PLC	± 0.3
		4 PLC	± 0.3
		ANGLES	± 3°

MATERIAL 材料	FINISH 仕上
----------------	--------------

DWN	 TE Connectivity Ltd.			
CHK				
APVD				
PRODUCT SPEC 製品規格	NAME 名称			
APPLICATION SPEC 取付適用規格		ON TAPING (EMBOSS) 0.5mm PITCH FINE MATE CONN. RECEPTACLE ASSEMBLY		
WEIGHT	SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED T
	A3	00779	C=1565357	
CUSTOMER DRAWING			SCALE 尺度	SHEET
			4:1	3 OF 3
				REV C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1565357-9](#)