
ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 44672	03/20	BNK
Α	DCN 51145	10/21	BNK

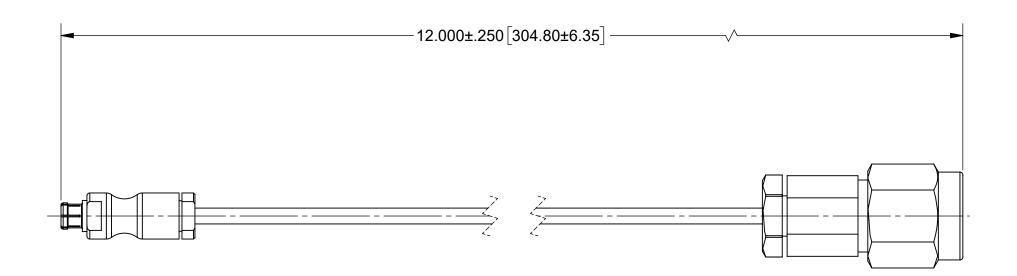

MATERIAL:

SMPM FEMALE (3221-40128) SMA MALE (SF2911-60966) CONNECTORS:

CABLE: SV ∅.047 SUPERFLEX CABLE (200-70-391)

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 26.5 GHz.

MATERIAL:	SEE NOTES	
FINISH:	SEE NOTES	
SURFACE AREA: N/A		
PROPRIETARY		
IS THE SOLE F ANY REPRODI WITHOUT THE	TION CONTAINED IN THIS DRAWI PROPERTY OF SV MICROWAVE, IN UCTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF /E, INC IS PROHIBITED.	

DIMENSIONS ARE IN INCHES TOLERANCES:	
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'	
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES. 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63. MIL-STD-10.
6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

UNLESS OTHERWISE SPECIFIED

. Erritome Tritom 1001		
THIRD ANGLE PROJECTION	DRAWN:	JPM 03/19/20
	CHECKED:	BNK 03/19/20
V U	APPROVED:	BNK 03/19/20



SMPM STR. F TO SMA STR. M SUPERFLEX CABLE ASSEMBLY

SIZE B	DWG. NO.	7032-	7777
S	CALE: 3:1		SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Amphenol</u>: 7032-7777