
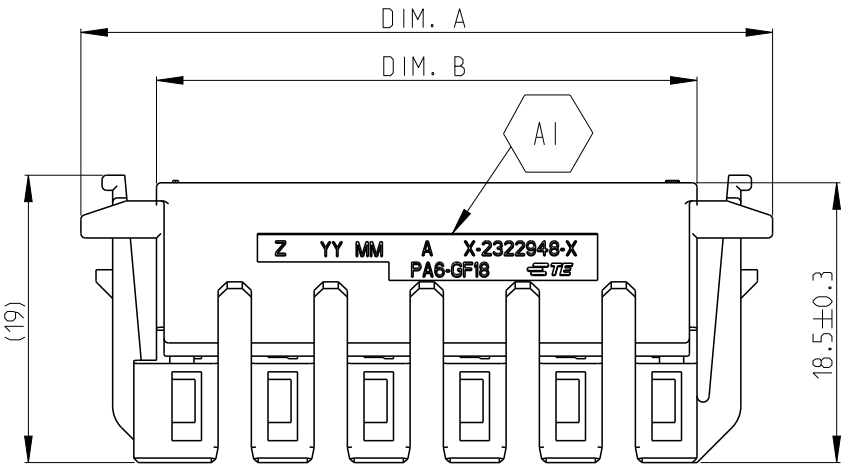
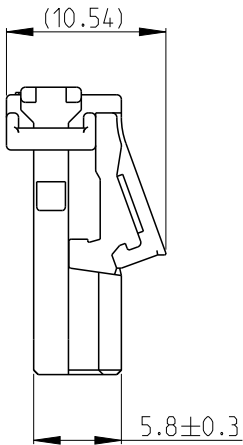


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	20NOV18	W.Z	W.W
	A1	REVISED(ECR-19-008773)	21JUN19	W.Z	W.W

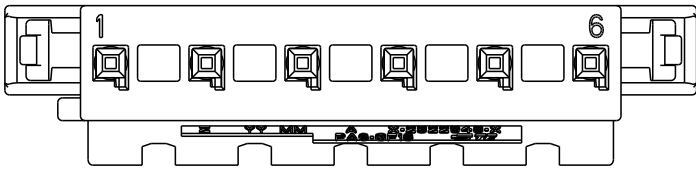

6 POS. CODING AS SHOWN


2 POS. CODING AS SHOWN

2322948-1 CODING A


2-2322948-1 CODING A

2322948-2 CODING B


2-2322948-2 CODING B



SECOND LOCK CLOSED STATUS



- 1 MATERIAL: PA6-GF18, ORANGE
2. SUITABLE TERMINAL P/N:
5-963715-1 , WIRE SIZE: 0.5~0.75mm²
5-928999-1 , WIRE SIZE: 0.25~0.35mm²
3. MATING HEADER P/N:
6P: 2322946-1/2322946-2, 2322949-1/2322949-2
2P: 2-2322946-1/2-2322946-2, 2-2322949-1/2-2322949-2
4. OPERATION TEMPERATURE: -40°C~+125°C
5. RATED OPERATION VOLTAGE: 1000V DC
6. 2322948-1 AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN X.LI 20JUL2017		TE Connectivity							
		CHK W.WU 07AUG2017									
		APVD L.YIN 10AUG2017									
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2		NAME HV DETECTING CONNECTOR							
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±									
MATERIAL 		FINISH - -		SIZE A 3		CAGE CODE 00779		DRAWING NO C-2322948		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 2:1		SHEET 1 OF 1		REV A1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2322948-1](#)