
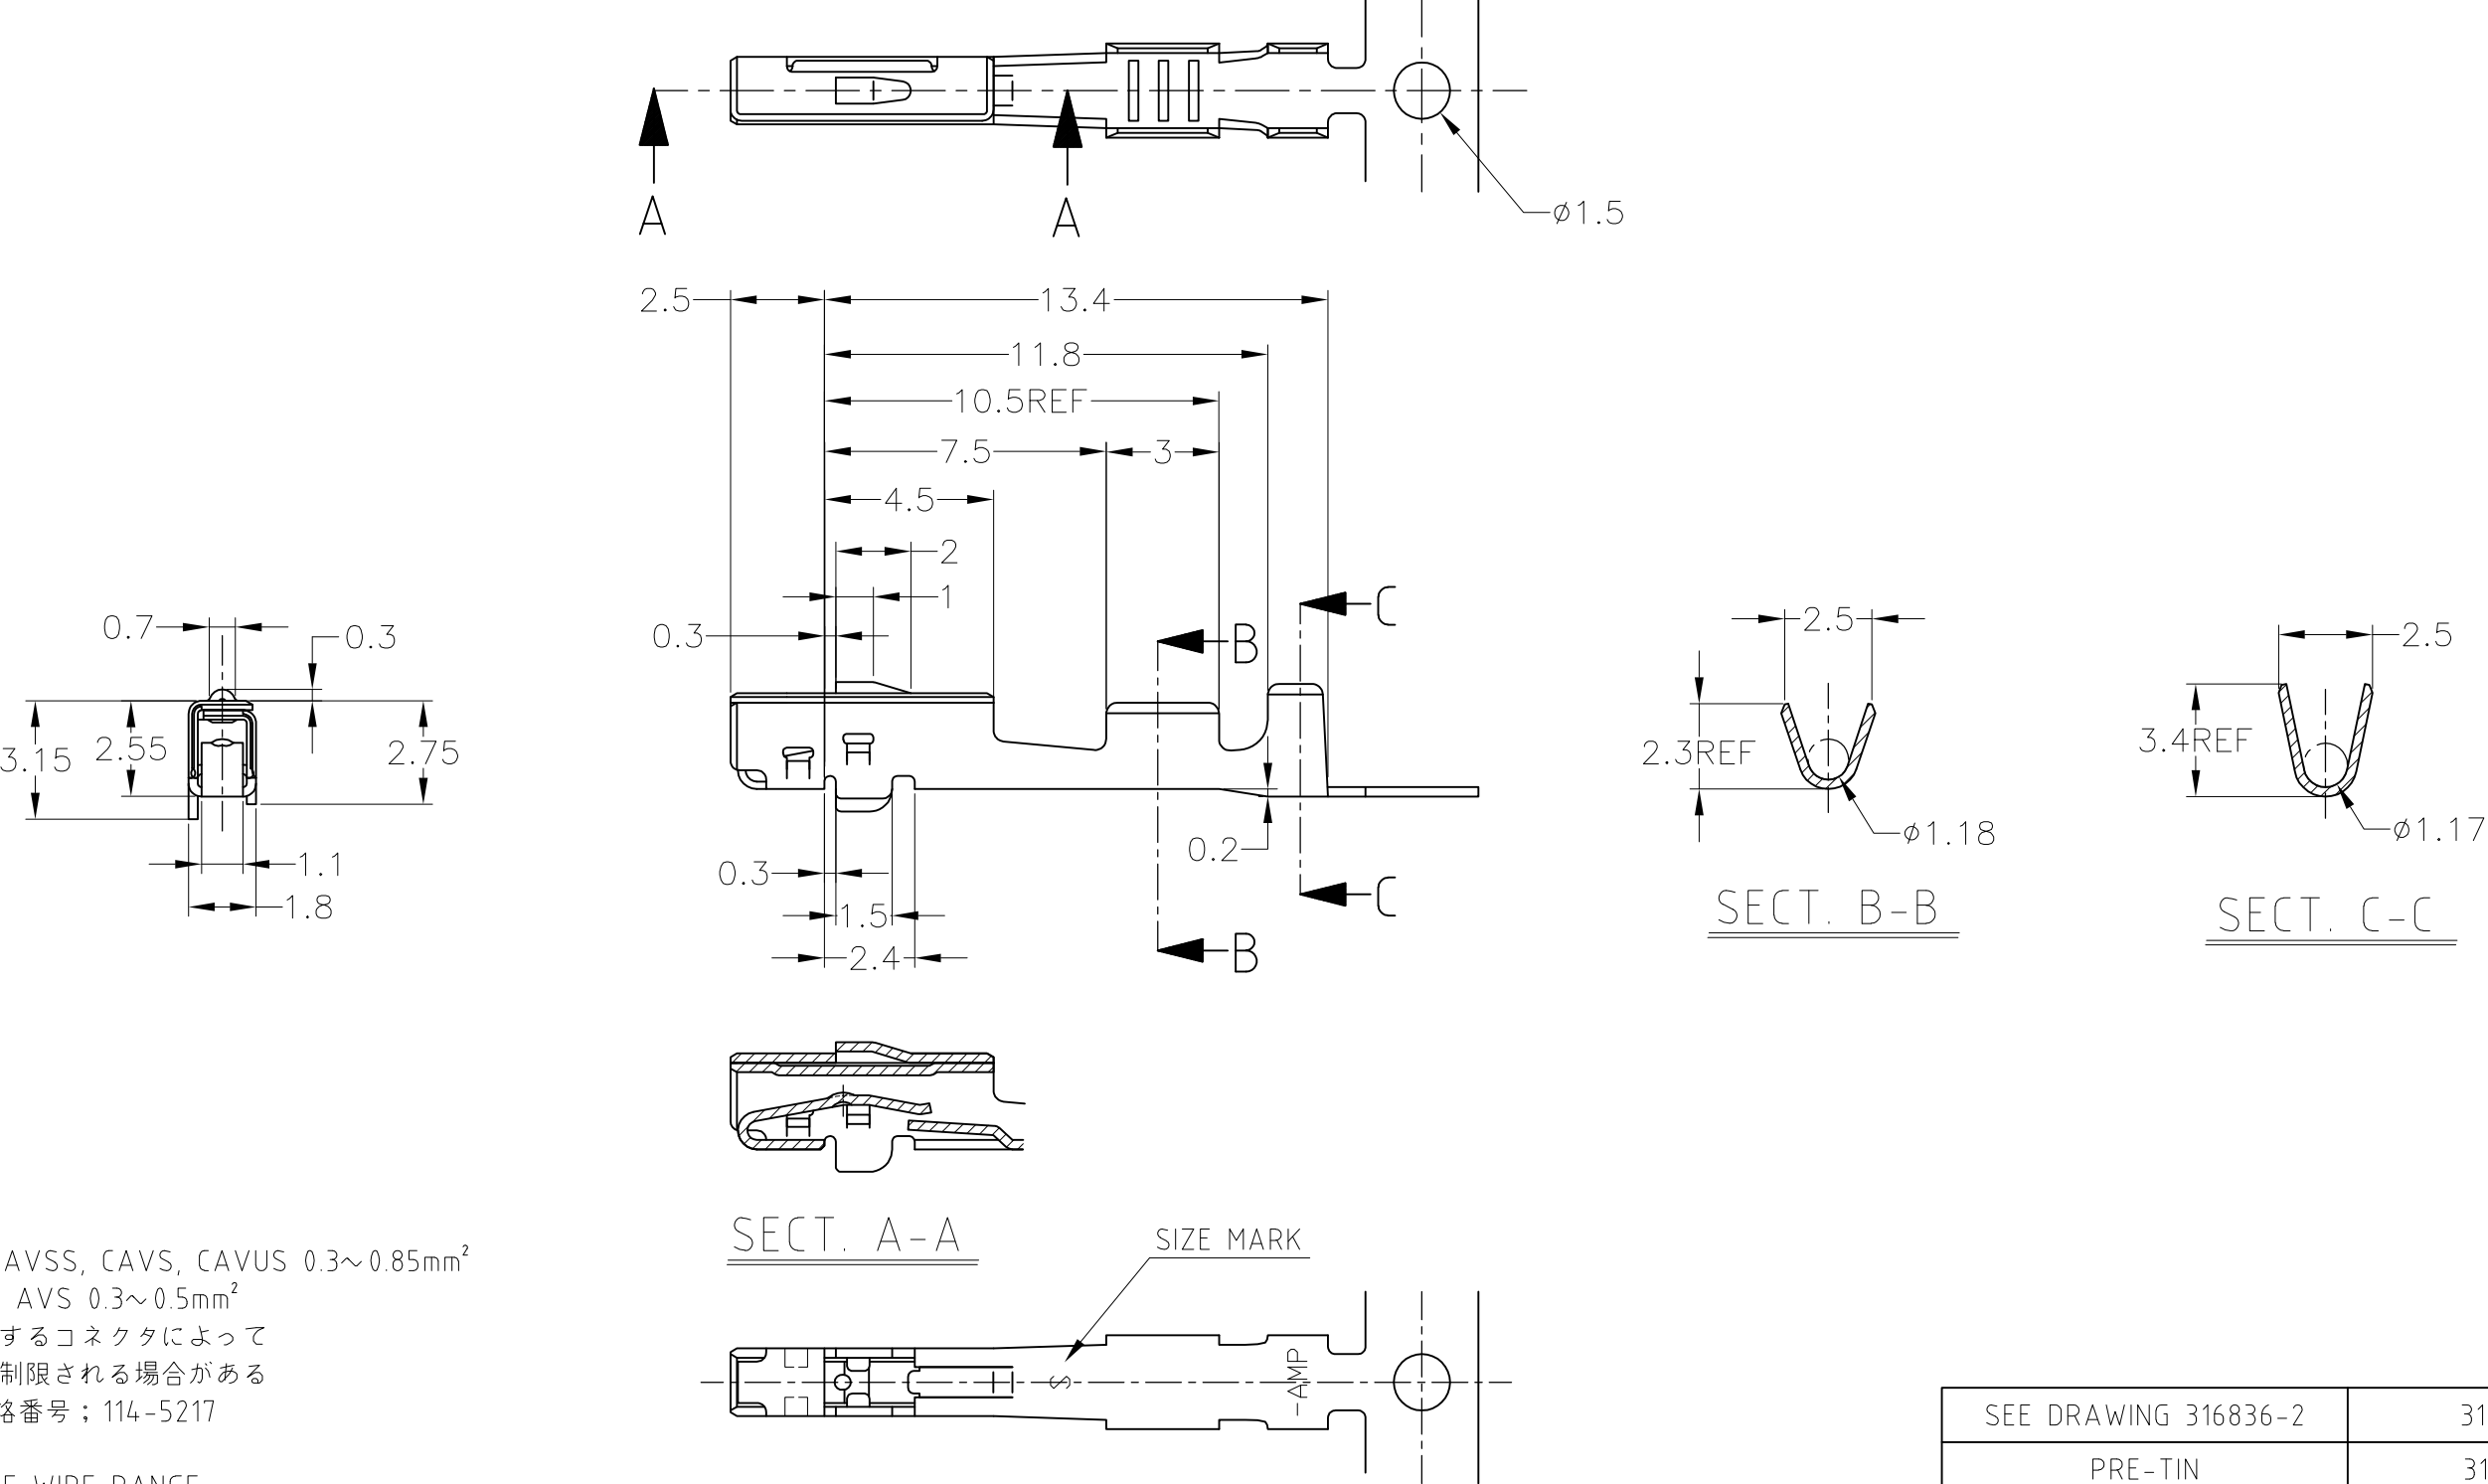


LOC	DIST	REVISIONS				
J	—	変更				
		P	LTR	DESCRIPTION	DATE	DWN
		P		REVISED PER ECO-11-005140	28MAR11	RK



1. 適用電線 ; AVSS, CAVS, CAVUS 0.3~0.85mm²
AVS 0.3~0.5mm²
但し、使用するコネクタによって
適用電線が制限される場合がある
2. 取付適用規格番号 ; 114-5217
1. APPLICABLE WIRE RANGE;
AVSS, CAVS, CAVUS 0.3~0.85mm²
AVS 0.3~0.5mm²
BUT, AN APPLIED CONNECTOR OFTEN MAKE
THE APPLICABLE WIRE RANGE NARROW
2. APPLICATION SPEC NO; 114-5217

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 10± : ±0.2 30± >10 : ±0.25 100± >30 : ±0.3 ANGLE : ±3°		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.SUGAWARA CHK T.SHINOHARA APVD K.BETSUI 17MAY06		TE TE Connectivity									
		DIMENSIONS: 単位 : 耗 mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME 名称 040 III UNSEALED CONTACT RECEPTACLE (S) Sn									
															
		MATERIAL 材料 Cu ALLOY						FINISH 仕上 SEE TABLE							
				PRODUCT SPEC 製品規格 —		SIZE CAGE CODE DRAWING NO 番号 A300779C-316836		RESTRICTED TO —							
				APPLICATION SPEC 取付適用規格 114-5217											
				WEIGHT 0.27g											
				CUSTOMER DRAWING						SCALE 尺度 5:1		SHEET 1 OF 1		REV P	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[316836-1](#)