
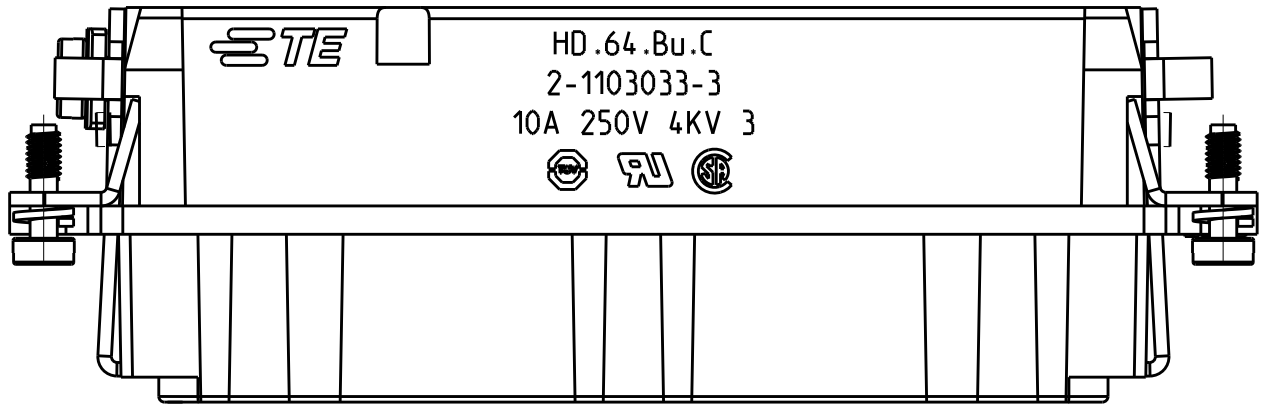
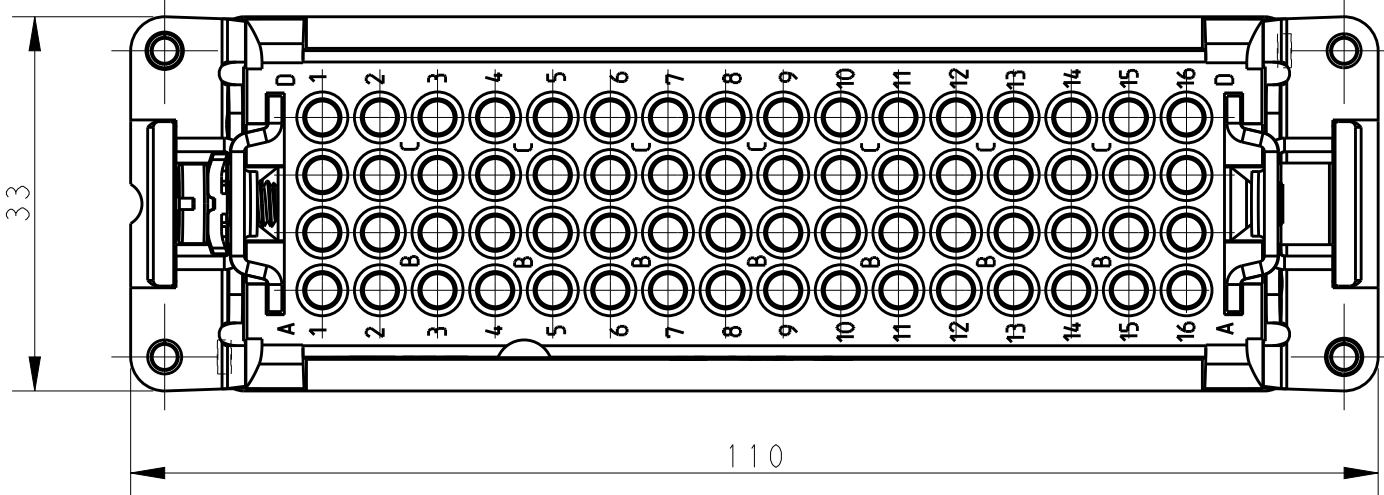


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-20-005011	06APR2020	QY	JB
	D	ECR-20-007704	03JUN2020	QY	JB
	D1	ECR-20-016724	25NOV2020	QY	JB




NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 250V
RATED CURRENT: 10A
INSULATION RESISTANCE: >=400MΩ
RATED IMPULSE VOLTAGE: 4KV
POLLUTION DEGREE: 3
MATING CYCLES: 500 CYCLES
TEMPERATURE RANGE: -40~+125°C
WIRE RANGE: 0.14mm²~2.5mm² (AWG26-AWG14)
2.CONTACT NEED TO BE ORDERED SEPARATELY.

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 250V
额定电流: 10A
绝缘电阻: >=400MΩ
脉冲电压: 4KV
污染等级: 3
插拔次数: 500 次
温度范围: -40~+125°C
接线范围: 0.14mm²~2.5mm² (AWG26-AWG14)
2. 端子需要单独订购.

M4 SCREW RECOMMENDED
TIGHTENING TORQUE 1.2Nm
M4螺丝, 推荐锁紧力矩1.2Nm

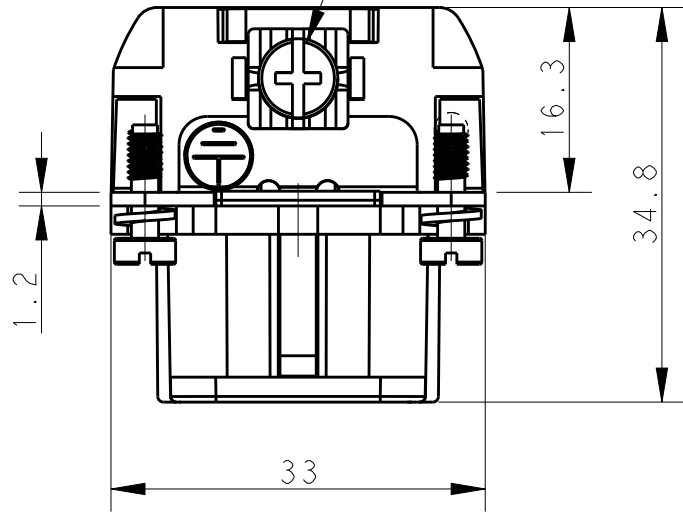

4X M3 SCREW
RECOMMENDED TIGHTENING TORQUE 0.5Nm
4X M3 螺丝, 推荐锁紧力矩0.5Nm

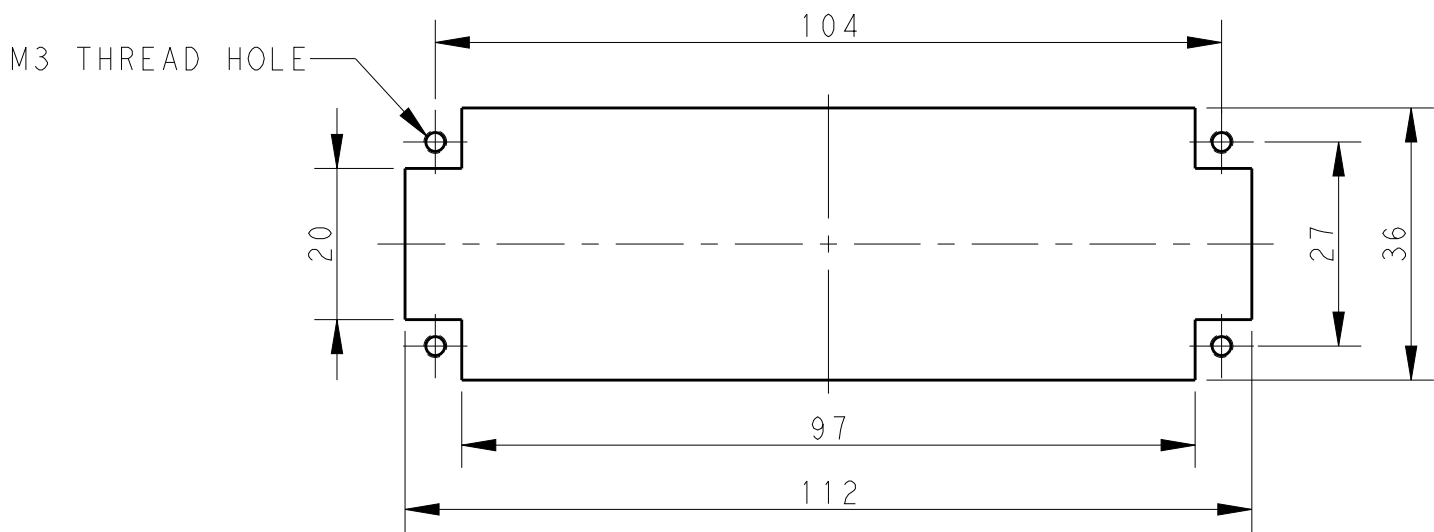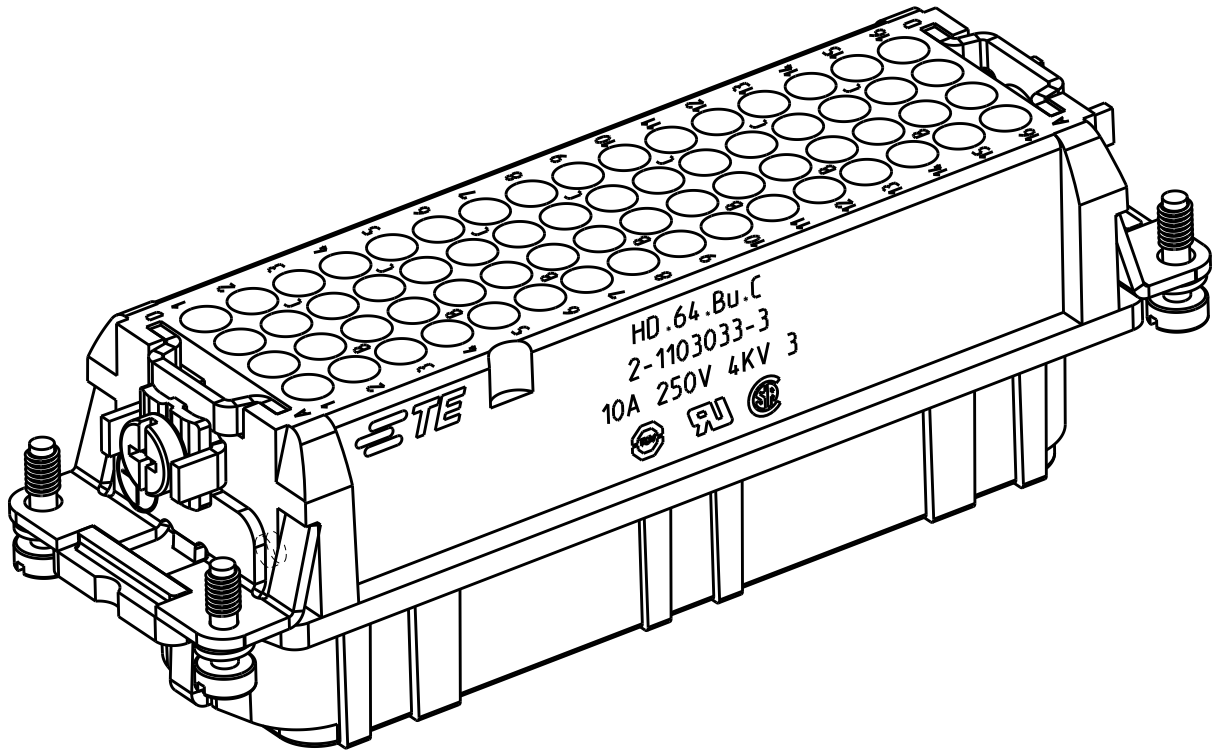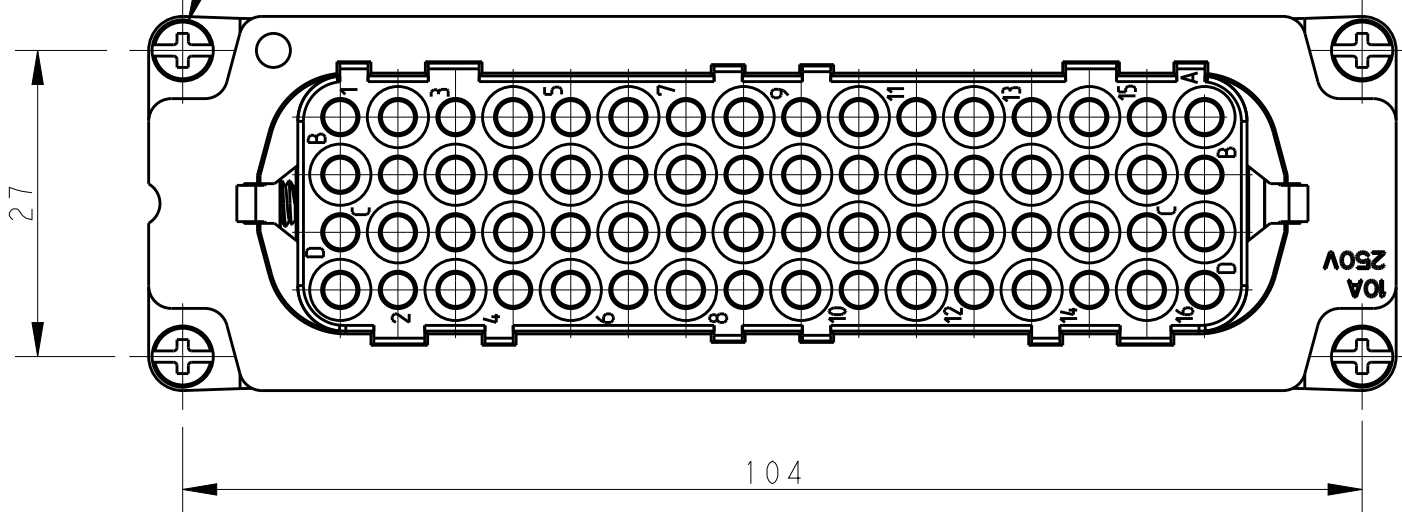

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

2-1103033-3	HD.64.Bu.C	HD-064 FEMALE INSERT FOR STAMPED CONTACT TYPE HD-064 母插, 卷皮针型(HTS)
PART NUMBER 料 号	PART DESCRIPTION 描 述	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 08JAN2020 CHK QIANG YUAN 08JAN2020 APVD JAN BREDOW 08JAN2020 MARCIN KOMAR		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HD.64.Bu.C	
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH -		PRODUCT SPEC 108-74002 APPLICATION SPEC 114-74000 WEIGHT -	
MATERIAL -		CUSTOMER DRAWING		SIZE A200779	CAGE CODE C=1103033
				SCALE 3:2	SHEET 1 OF 1
				REV D1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1103033-3](#)