



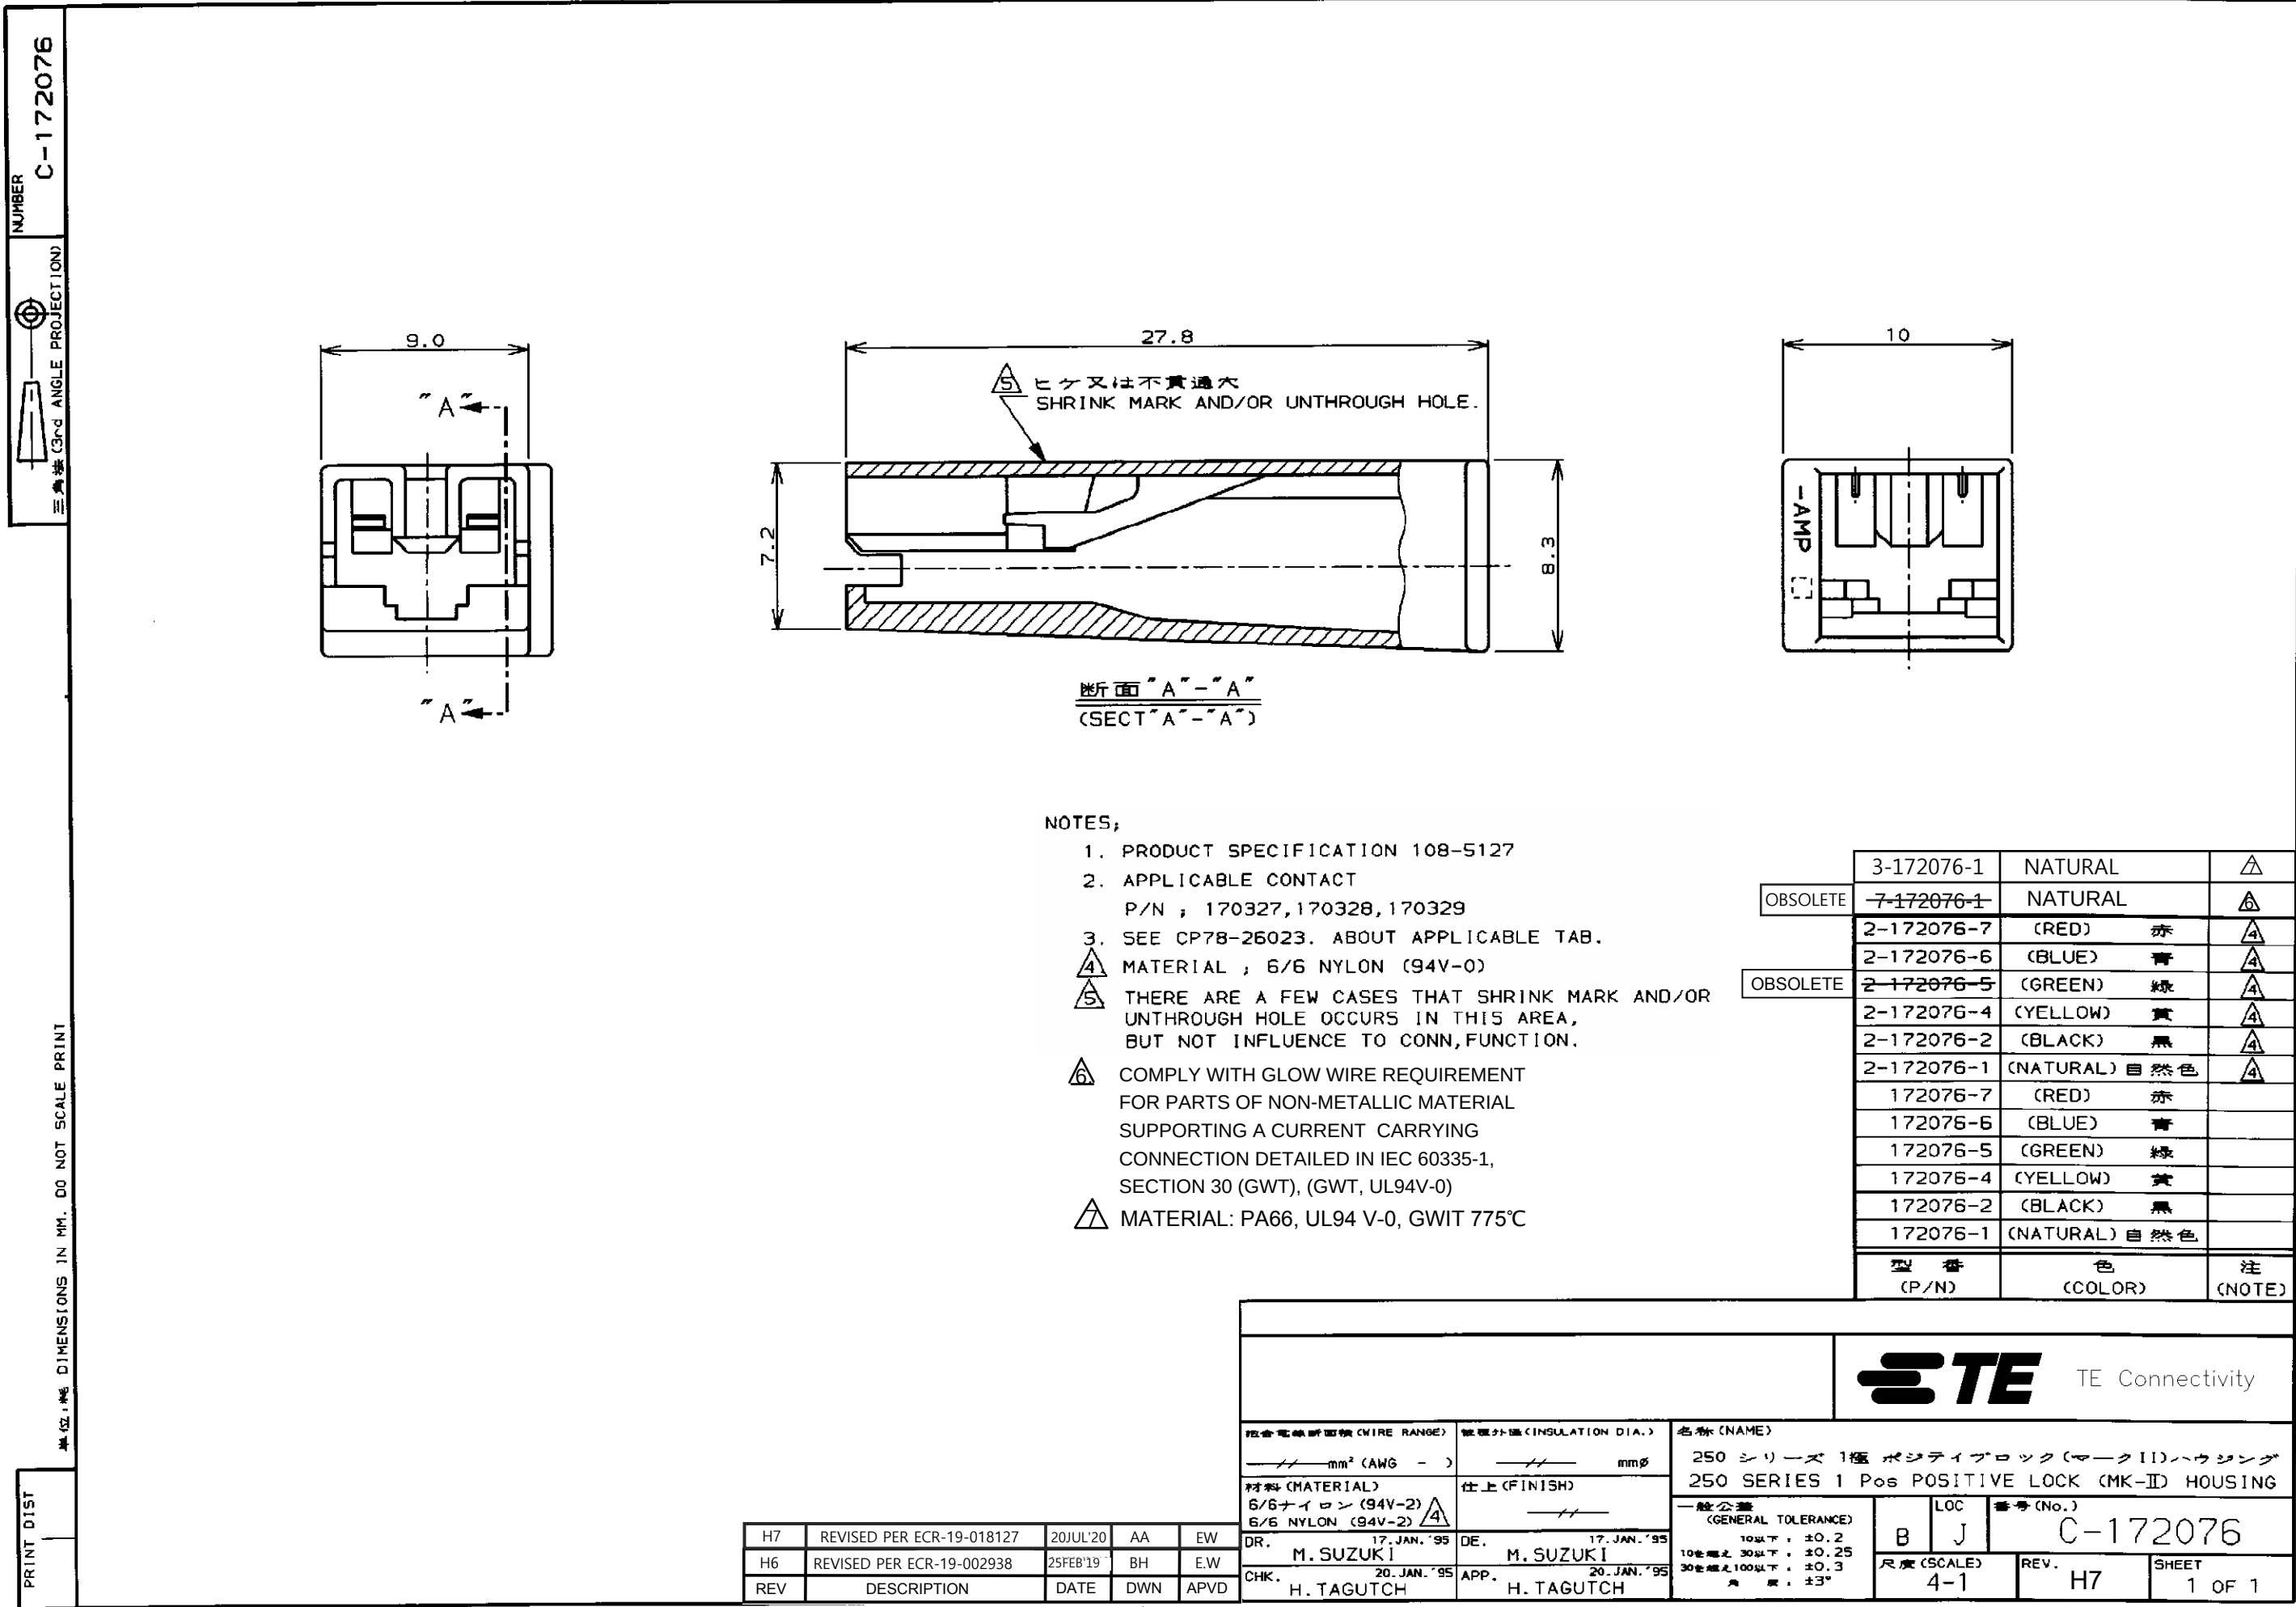

4 3 2 1

NUMBER C-172076

三角接 (3rd ANGLE PROJECTION)

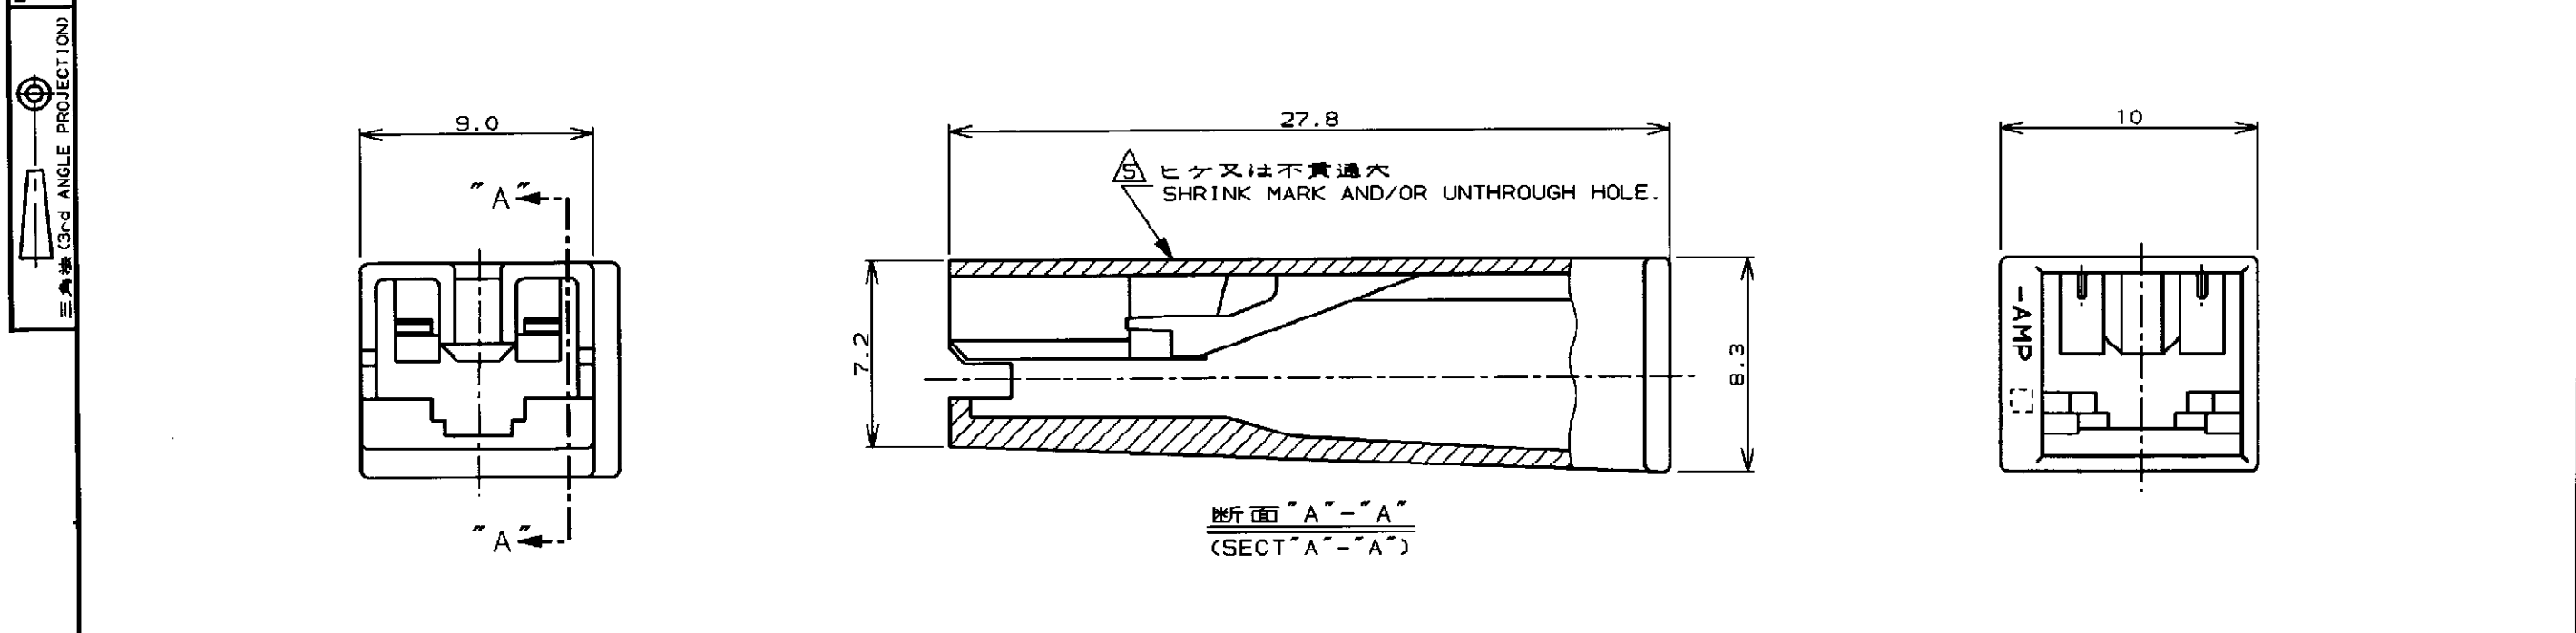

PRINT DIST

単位: mm DIMENSIONS IN MM. DO NOT SCALE PRINT

NOTES;

1. PRODUCT SPECIFICATION 108-5127
2. APPLICABLE CONTACT
P/N ; 170327,170328,170329
3. SEE CP78-26023. ABOUT APPLICABLE TAB.
- △ MATERIAL ; 6/6 NYLON (94V-0)
- △ THERE ARE A FEW CASES THAT SHRINK MARK AND/OR UNTHROUGH HOLE OCCURS IN THIS AREA, BUT NOT INFLUENCE TO CONN,FUNCTION.
- △ COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), (GWT, UL94V-0)
- △ MATERIAL: PA66, UL94 V-0, GWIT 775°C

	3-172076-1	NATURAL	△
OBSOLETE	7-172076-1	NATURAL	△
	2-172076-7	(RED) 赤	△
	2-172076-6	(BLUE) 青	△
OBSOLETE	2-172076-5	(GREEN) 緑	△
	2-172076-4	(YELLOW) 黄	△
	2-172076-2	(BLACK) 黒	△
	2-172076-1	(NATURAL) 自然色	△
	172076-7	(RED) 赤	
	172076-6	(BLUE) 青	
	172076-5	(GREEN) 緑	
	172076-4	(YELLOW) 黄	
	172076-2	(BLACK) 黒	
	172076-1	(NATURAL) 自然色	
	型番 (P/N)	色 (COLOR)	注 (NOTE)

H7	REVISED PER ECR-19-018127	20JUL'20	AA	EW
H6	REVISED PER ECR-19-002938	25FEB'19	BH	E.W
REV	DESCRIPTION	DATE	DWN	APVD

TE Connectivity	
250 シリーズ 1極 ポジティブロック (マークII)ハウジング 250 SERIES 1 Pos POSITIVE LOCK (MK-II) HOUSING	
材料 (MATERIAL) 6/6 ナイロン (94V-2) △ 6/6 NYLON (94V-2) △	仕上 (FINISH) — / —
DR. M. SUZUKI 17. JAN. '95 CHK. H. TAGUTCH 20. JAN. '95	DE. M. SUZUKI 17. JAN. '95 APP. H. TAGUTCH 20. JAN. '95
一般公差 (GENERAL TOLERANCE) 10以下 ±0.2 10を超え 30以下 ±0.25 30を超え 100以下 ±0.3 角 度: ±3°	LOC 番号 (No.) B J C-172076 尺 度 (SCALE) 4-1 REV. H7 SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-172076-1](#)