


REVISIONS DESCRIPTION SEE SHEET 1

TABLE 1: CONNECTOR CONTACT IDENTIFICATION 25/6

			_			
ONTACT NUMBER	SIDE A	SIDE B		CONTACT NUMBER	SIDE A	SIDE B
1	GROUND	GROUND		36	SIGNAL	SIGNAL
2	SIGNAL	SIGNAL		37	SIGNAL	SIGNAL
3	SIGNAL	SIGNAL		38	GROUND	GROUND
4	GROUND	GROUND		39	SIGNAL	SIGNAL
5	SIGNAL	SIGNAL		40	SIGNAL	SIGNAL
6	SIGNAL	SIGNAL		4 1	GROUND	GROUND
7	GROUND	GROUND		42	GROUND	GROUND
8	SIGNAL	SIGNAL		43	GROUND	GROUND
9	SIGNAL	SIGNAL		4 4	SIGNAL	SIGNAL
10	GROUND	GROUND		45	SIGNAL	SIGNAL
1 1	SIGNAL	SIGNAL		46	GROUND	GROUND
12	SIGNAL	SIGNAL		47	SIGNAL	SIGNAL
13	GROUND	GROUND		48	SIGNAL	SIGNAL
1 4	SIGNAL	SIGNAL		4 9	GROUND	GROUND
15	SIGNAL	SIGNAL		50	SIGNAL	SIGNAL
16	GROUND	GROUND		5 1	SIGNAL	SIGNAL
1 7	SIGNAL	SIGNAL		52	GROUND	GROUND
18	SIGNAL	SIGNAL		53	SIGNAL	SIGNAL
19	GROUND	GROUND		5 4	SIGNAL	SIGNAL
20	SIGNAL	SIGNAL		55	GROUND	GROUND
21	SIGNAL	SIGNAL		56	SIGNAL	SIGNAL
22	GROUND	GROUND		57	SIGNAL	SIGNAL
23	SIGNAL	SIGNAL		58	GROUND	GROUND
2 4	SIGNAL	SIGNAL		59	SIGNAL	SIGNAL
25	GROUND	GROUND		60	SIGNAL	SIGNAL
26	SIGNAL	SIGNAL		6 1	GROUND	GROUND
27	SIGNAL	SIGNAL		62	SIGNAL	SIGNAL
28	GROUND	GROUND		6 3	SIGNAL	SIGNAL
29	GROUND	GROUND		6 4	GROUND	GROUND
30	SIGNAL	SIGNAL		6 5	SIGNAL	SIGNAL
3 1	SIGNAL	SIGNAL		6 6	SIGNAL	SIGNAL
32	GROUND	GROUND		6 7	GROUND	GROUND
33	SIGNAL	SIGNAL		68	SIGNAL	SIGNAL
3 4	SIGNAL	SIGNAL		6 9	SIGNAL	SIGNAL
35	GROUND	GROUND		70	GROUND	GROUND

CONTACT NUMBER	SIDE A	SIDE B
36	SIGNAL	SIGNAL
37	SIGNAL	SIGNAL
38	GROUND	GROUND
3 9	SIGNAL	SIGNAL
40	SIGNAL	SIGNAL
4 1	GROUND	GROUND
42	GROUND	GROUND
4 3	GROUND	GROUND
4 4	SIGNAL	SIGNAL
45	SIGNAL	SIGNAL
46	GROUND	GROUND
47	SIGNAL	SIGNAL
48	SIGNAL	SIGNAL
4 9	GROUND	GROUND
50	SIGNAL	SIGNAL
5 1	SIGNAL	SIGNAL
52	GROUND	GROUND
5 3	SIGNAL	SIGNAL
5 4	SIGNAL	SIGNAL
55	GROUND	GROUND
56	SIGNAL	SIGNAL
57	SIGNAL	SIGNAL
58	GROUND	GROUND
59	SIGNAL	SIGNAL
60	SIGNAL	SIGNAL
6 1	GROUND	GROUND
62	SIGNAL	SIGNAL
6 3	SIGNAL	SIGNAL
6 4	GROUND	GROUND
65	SIGNAL	SIGNAL
6 6	SIGNAL	SIGNAL
6 7	GROUND	GROUND
68	SIGNAL	SIGNAL
6 9	SIGNAL	SIGNAL
7 ^	GROUND	GROUND

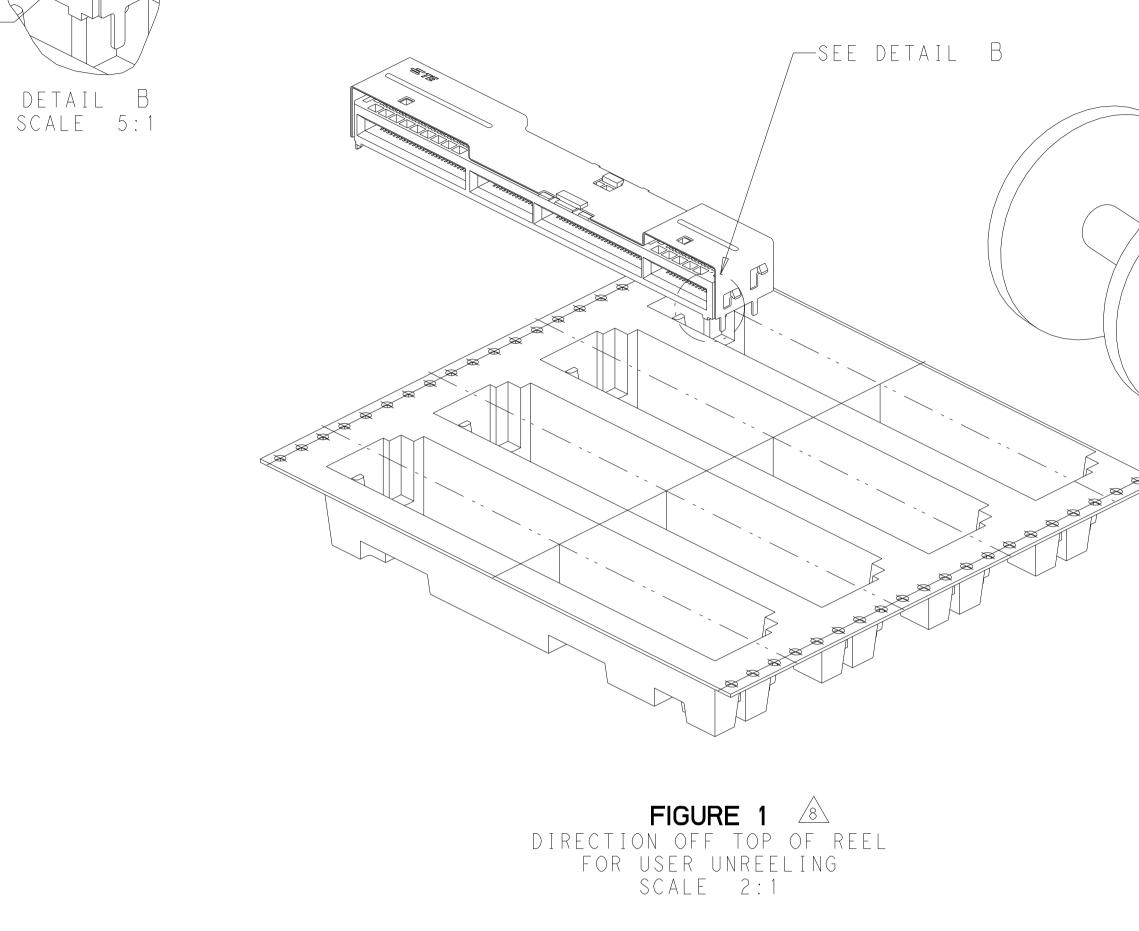

A	HOLD DOWNS	PLATING	POCKET TAPE PITCH	REEL QUANITY	MATING CYCLES	PART NUMBER
1.8 +0.2/-0.1	ALL	0.38µm Au FLASH Au/PdNi	20	350	100 50	2369833-2
		0.76 µm Au			200	2369833-3
		FLASH Au/PdNi			50	2369833-4
1.8 + 0.2/-0.1	ENDS	0.38µm Au	20	350	100	2369833-5
		0.76 µm A u		350	200	2369833-6
		FLASH Au/PdNi			50	2369833-7
1.2±0.2	ENDS	0.38µm Au	20		100	2369833-8
		0.76 µm A u			200	2369833-9
		FLASH Au/PdNi			50	2-2369833-0
1.8 + 0.2 / - 0.1	ENDS AND CENTER	0.38µm Au	20	350	100	2-2369833-1
		0.76µm Au			200	2-2369833-2

Ε,
RICTED TO
-
REV A

04	GROUND	GROUND
05	SIGNAL	SIGNAL
06	SIGNAL	SIGNAL
07	GROUND	GROUND
08	SIGNAL	SIGNAL
09	SIGNAL	SIGNAL
010	GROUND	GROUND
011	SIGNAL	SIGNAL
012	SIGNAL	SIGNAL

GROUND

GROUND

SIDE A

GROUND

SIGNAL

SIGNAL

SIDE B

GROUND

SIGNAL

SIGNAL

GROUND

GROUND

CONTACT NUMBER

01

02

03

013

014

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

C COPYRIGHT 20

TABLE 1: CONNECTOR CONTACT IDENTIFICATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

2369833-1 2369833-2 2369833-3