
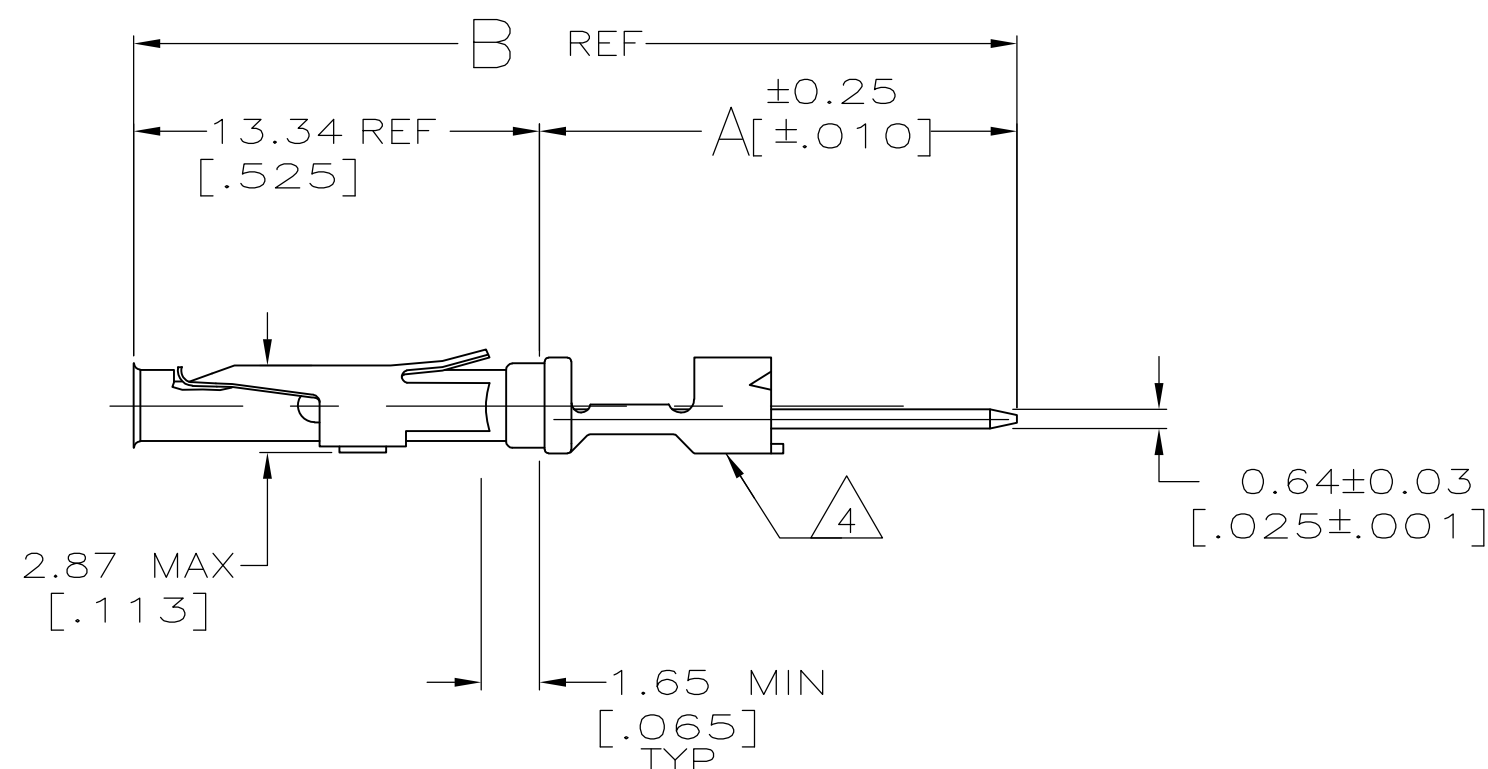


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By -		ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AV6	REVISED PER ECO-16-004223	19JUL2016	NK	MZ
	AW	REVISED PER ECO-16-017462	08MAR2017	RS	MZ

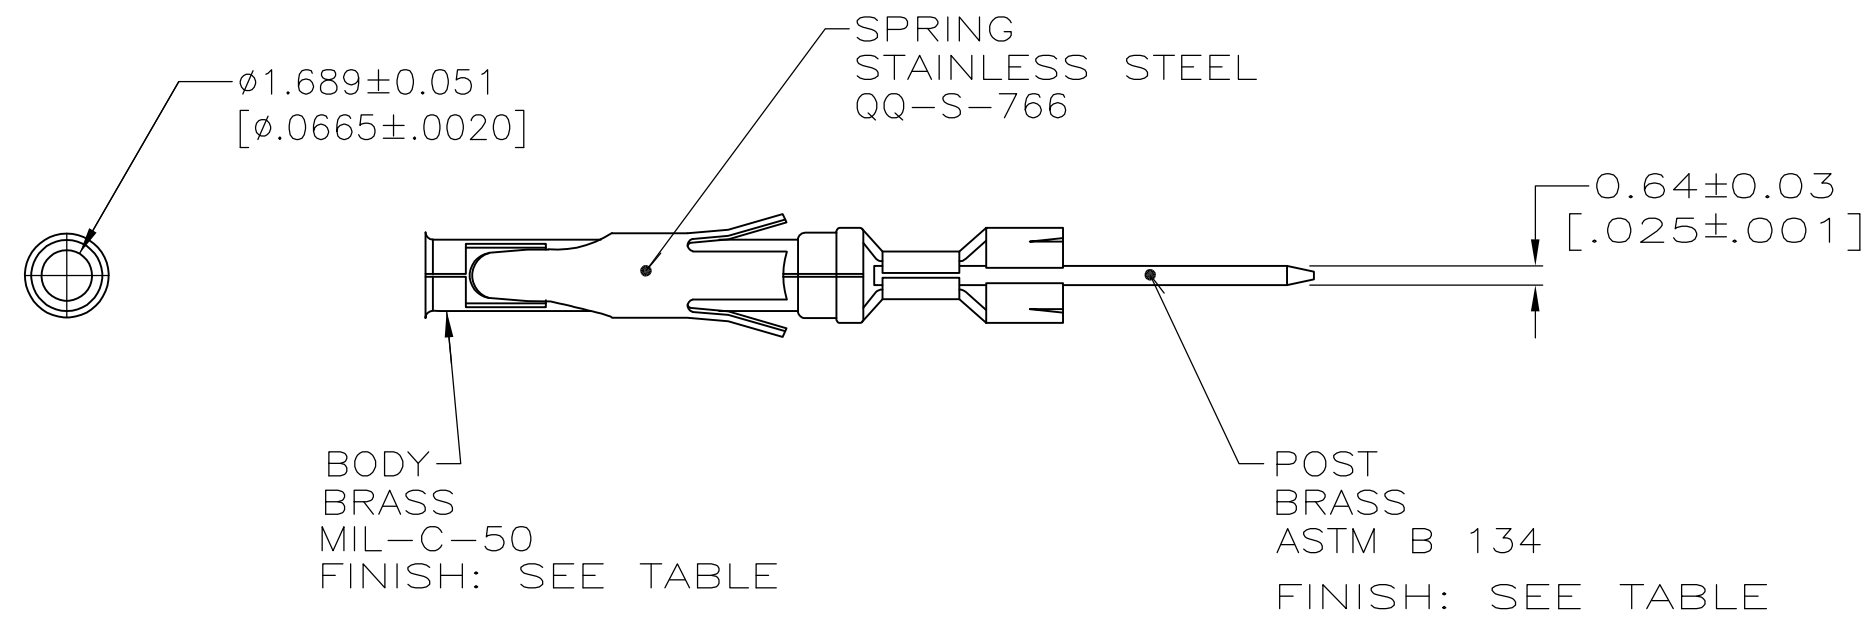

- | | |
|---|---|
| 1 | 2.54um [.000100] MIN TIN-LEAD PER MIL-T-10727 OVER
1.27um [.000050] MIN NICKEL PER QQ-N-290. |
| 2 | 2.76um [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR
A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25um
[.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER
1.27um [.000050] MIN NICKEL PER QQ-N-290. |
| 3 | 2.54um [.000100] MIN TIN-LEAD PER MIL-T-10727 OVER
1.27um [.000050] MIN NICKEL PER QQ-N-290. |
| 4 | GOLD PLATING NEED NOT APPEAR ON WIRE BARREL. |
| 5 | 0.76um [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR
A LENGTH OF 5.08 [.200] MIN, GOLD FLASH ON THE REMAINDER OVER
1.27um [.000050] MIN NICKEL PER QQ-N-290. |
| 6 | .000100 MIN TIN PER MIL-T-10727, OVER
.000050 MIN NICKEL PER QQ-N-290. |
| 7 | .000030 MIN GOLD PER MIL-G-45204, OVER
.000050 MIN NICKEL PER QQ-N-290. |
| 8 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

	PRELIMINARY	34.44 [1.356]	21.11 [.831]	2			5-66461-7
		29.13 [1.147]	15.80 [.622]	1			5-66461-6
		29.13 [1.147]	15.80 [.622]	1			5-66461-5
		29.13 [1.147]	15.80 [.622]	1			5-66461-4
	PRELIMINARY	34.44 [1.356]	21.11 [.831]	2			5-66461-3
	OBSOLETE	49.40 [1.945]	36.07 [1.420]	SPECIAL			—5-66461-1—
	OBSOLETE	30.68 [1.208]	17.35 [.683]	SPECIAL			—2-66461-2—
	SUPERSEDED	34.44 [1.356]	21.11 [.831]	2			—2-66461-1—
	OBSOLETE	41.48 [1.633]	28.14 [1.108]	SPECIAL			—2-66461-0—
		30.68 [1.208]	17.35 [.683]	SPECIAL			1-66461-9
	OBSOLETE	29.64 [1.167]	16.31 [.642]	SPECIAL			—1-66461-8—
	OBSOLETE	27.97 [1.101]	14.63 [.576]	SPECIAL			—1-66461-7—
	OBSOLETE	25.68 [1.011]	12.34 [.486]	SPECIAL			—1-66461-3—
		43.46 [1.711]	30.12 [1.186]	SPECIAL			—1-66461-0—
		39.24 [1.545]	25.91 [1.020]	3			66461-9
		34.44 [1.356]	21.11 [.831]	2			66461-8
		29.13 [1.147]	15.80 [.622]	1			66461-7
		39.24 [1.545]	25.91 [1.020]	3			66461-6
		34.44 [1.356]	21.11 [.831]	2			66461-5
		29.13 [1.147]	15.80 [.622]	1			66461-4
		39.24 [1.545]	25.91 [1.020]	3			66461-3
		34.44 [1.356]	21.11 [.831]	2			66461-2
		29.13 [1.147]	15.80 [.622]	1			66461-1
	B	A	NO OF TERM	POST FINISH	BODY FINISH	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.OBERMAN 07/02/92 CHK R.STONE 7-8-92 APVD C.OBERMANN 7-10-92		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME SOCKET CONTACT, CRIMPED .062 DIA, .025 X .025 POST, AUTOWIRE	
MATERIAL SEE CALLOUT		FINISH SEE CALLOUT			
		PRODUCT SPEC - APPLICATION SPEC - WEIGHT -		SIZE A2	GAGE CODE 00779
		CUSTOMER DRAWING		DRAWING NO C-66461	RESTRICTED TO -
				SCALE 4:1	SHEET 1 of 2
				REV AW	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—
	—	SEE TABLE 1	—	—	—

	OBSOLETE	49.40 [1.945]	36.07 [1.420]	SPECIAL			9-66461-9
		30.68 [1.208]	17.35 [.683]	SPECIAL			7-66461-0
	OBSOLETE	30.68 [1.208]	17.35 [.683]	SPECIAL			6-66461-5
		41.48 [1.633]	28.14 [1.108]	SPECIAL			6-66461-4
		39.24 [1.545]	25.91 [1.020]	3			6-66461-3
		34.44 [1.356]	21.11 [.831]	2			6-66461-2
	 OBSOLETE	39.24 [1.545]	25.91 [1.020]	3			6-66461-1
		34.44 [1.356]	21.11 [.831]	2			6-66461-0
		39.24 [1.545]	25.91 [1.020]	3			5-66461-9
		34.44 [1.356]	21.11 [.831]	2			5-66461-8
		B	A	NO OF TERM	POST FINISH	BODY FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.OBERMAN 07/02/92 CHK R.STONE 7-8-92		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED: APVD C.OBERMANN 7-10-92 PRODUCT SPEC — APPLICATION SPEC —		NAME SOCKET CONTACT, CRIMPED .062 DIA, .025 X .025 POST, AUTOWIRE	
		SIZE A2 CAGE CODE 00779 DRAWING NO C-66461 RESTRICTED TO —			
MATERIAL SEE CALLOUT		FINISH SEE CALLOUT WEIGHT —		SCALE 4:1 SHEET 2 of 2 REV AW	
CUSTOMER DRAWING					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-66461-9](#)