
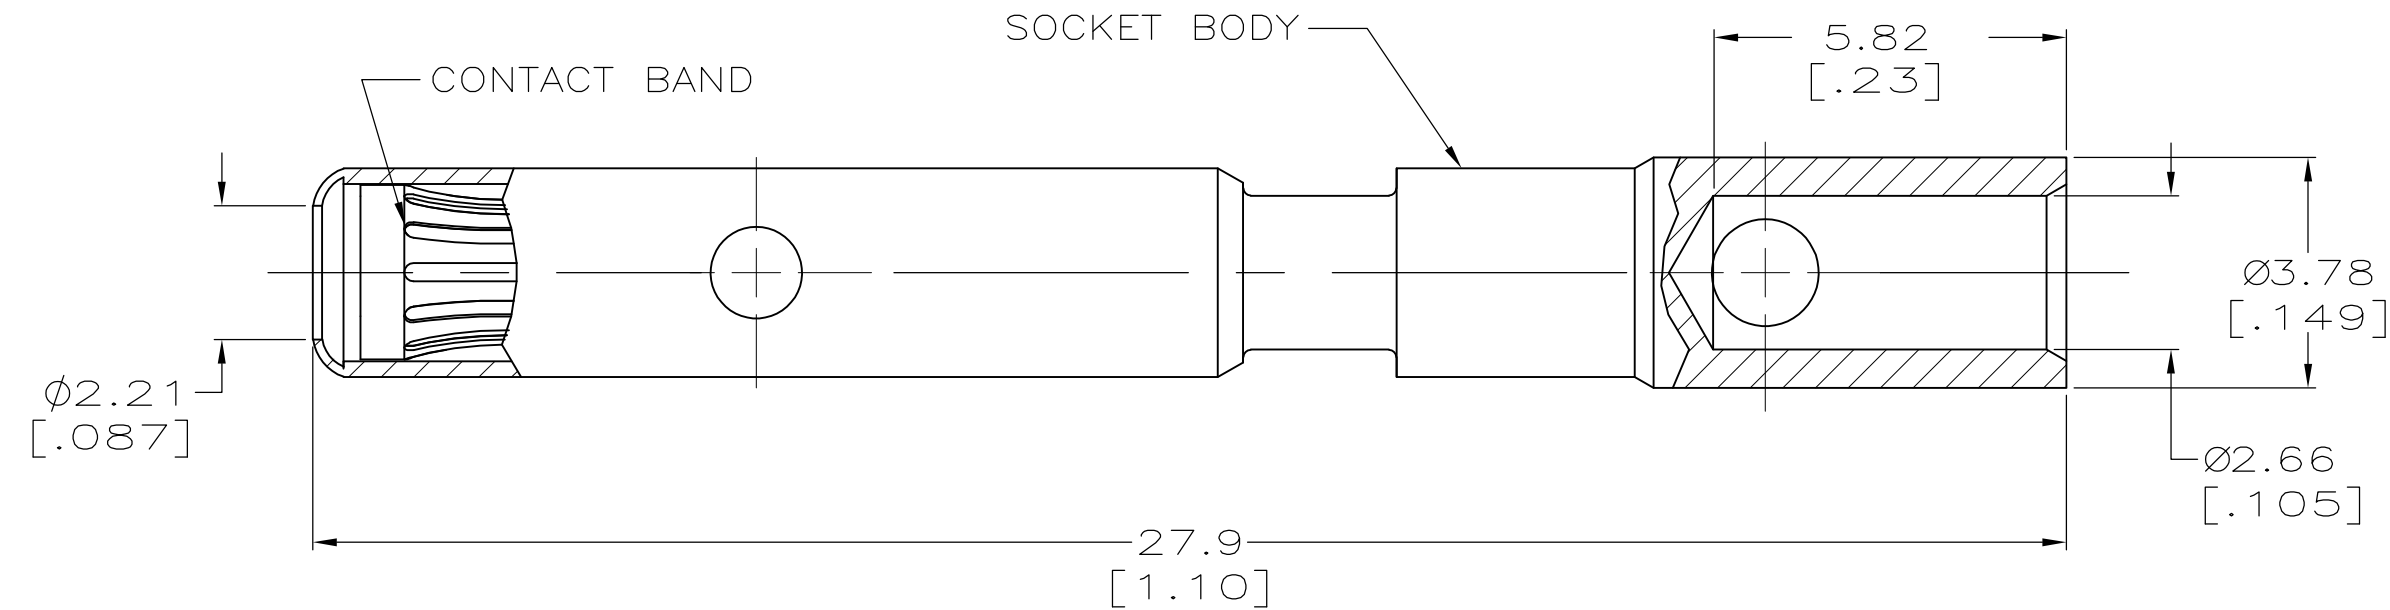


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
FT	0		H2	REVISED PER ECO-11-004917	11MAR11	RK	HMR

- 1 MATERIAL: BODY — COPPER ALLOY
BAND — BeCu
- 2 FINISH: BODY AND BAND — .0002 IN. SILVER
OVER .00004 IN. NICKEL.
3. WIRE BARREL WILL ACCEPT 12–14 AWG WIRE.
4. MATES WITH AMP PART NUMBER 193841–1.
- 5 FINISH: BODY — 30 uIN GOLD MIN. OVER 50 uIN
NICKEL MIN. BAND— GOLD
- 6 FINISH: BODY AND BAND —
AT MINIMUM, HARD GOLD FLASH OVER 40 uINCHES
80–20 Pd/Ni OVER 100 uINCHES NICKEL.
7. ALL DIMENSIONS ARE REFERENCE.



OBSOLETE	6	193842–3
	5	193842–2
	2	193842–1
	FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. M. SVOBODA		03-18-94		 TE Connectivity									
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK —		NAME SOCKET ASSY, 2mm, 12-14 AWG HIGHCURRENT MATE-N-LOK II —									
		0 PLC ± -		APVD —											
		1 PLC ± -		PRODUCT SPEC —											
		2 PLC ± -		APPLICATION SPEC —											
3 PLC ± -		4 PLC ± -		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
MATERIAL 		FINISH —		WEIGHT —		A3		00779		C-193842		—			
CUSTOMER DRAWING										SCALE —		SHEET 1 OF 1		REV H2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[193842-1](#)