


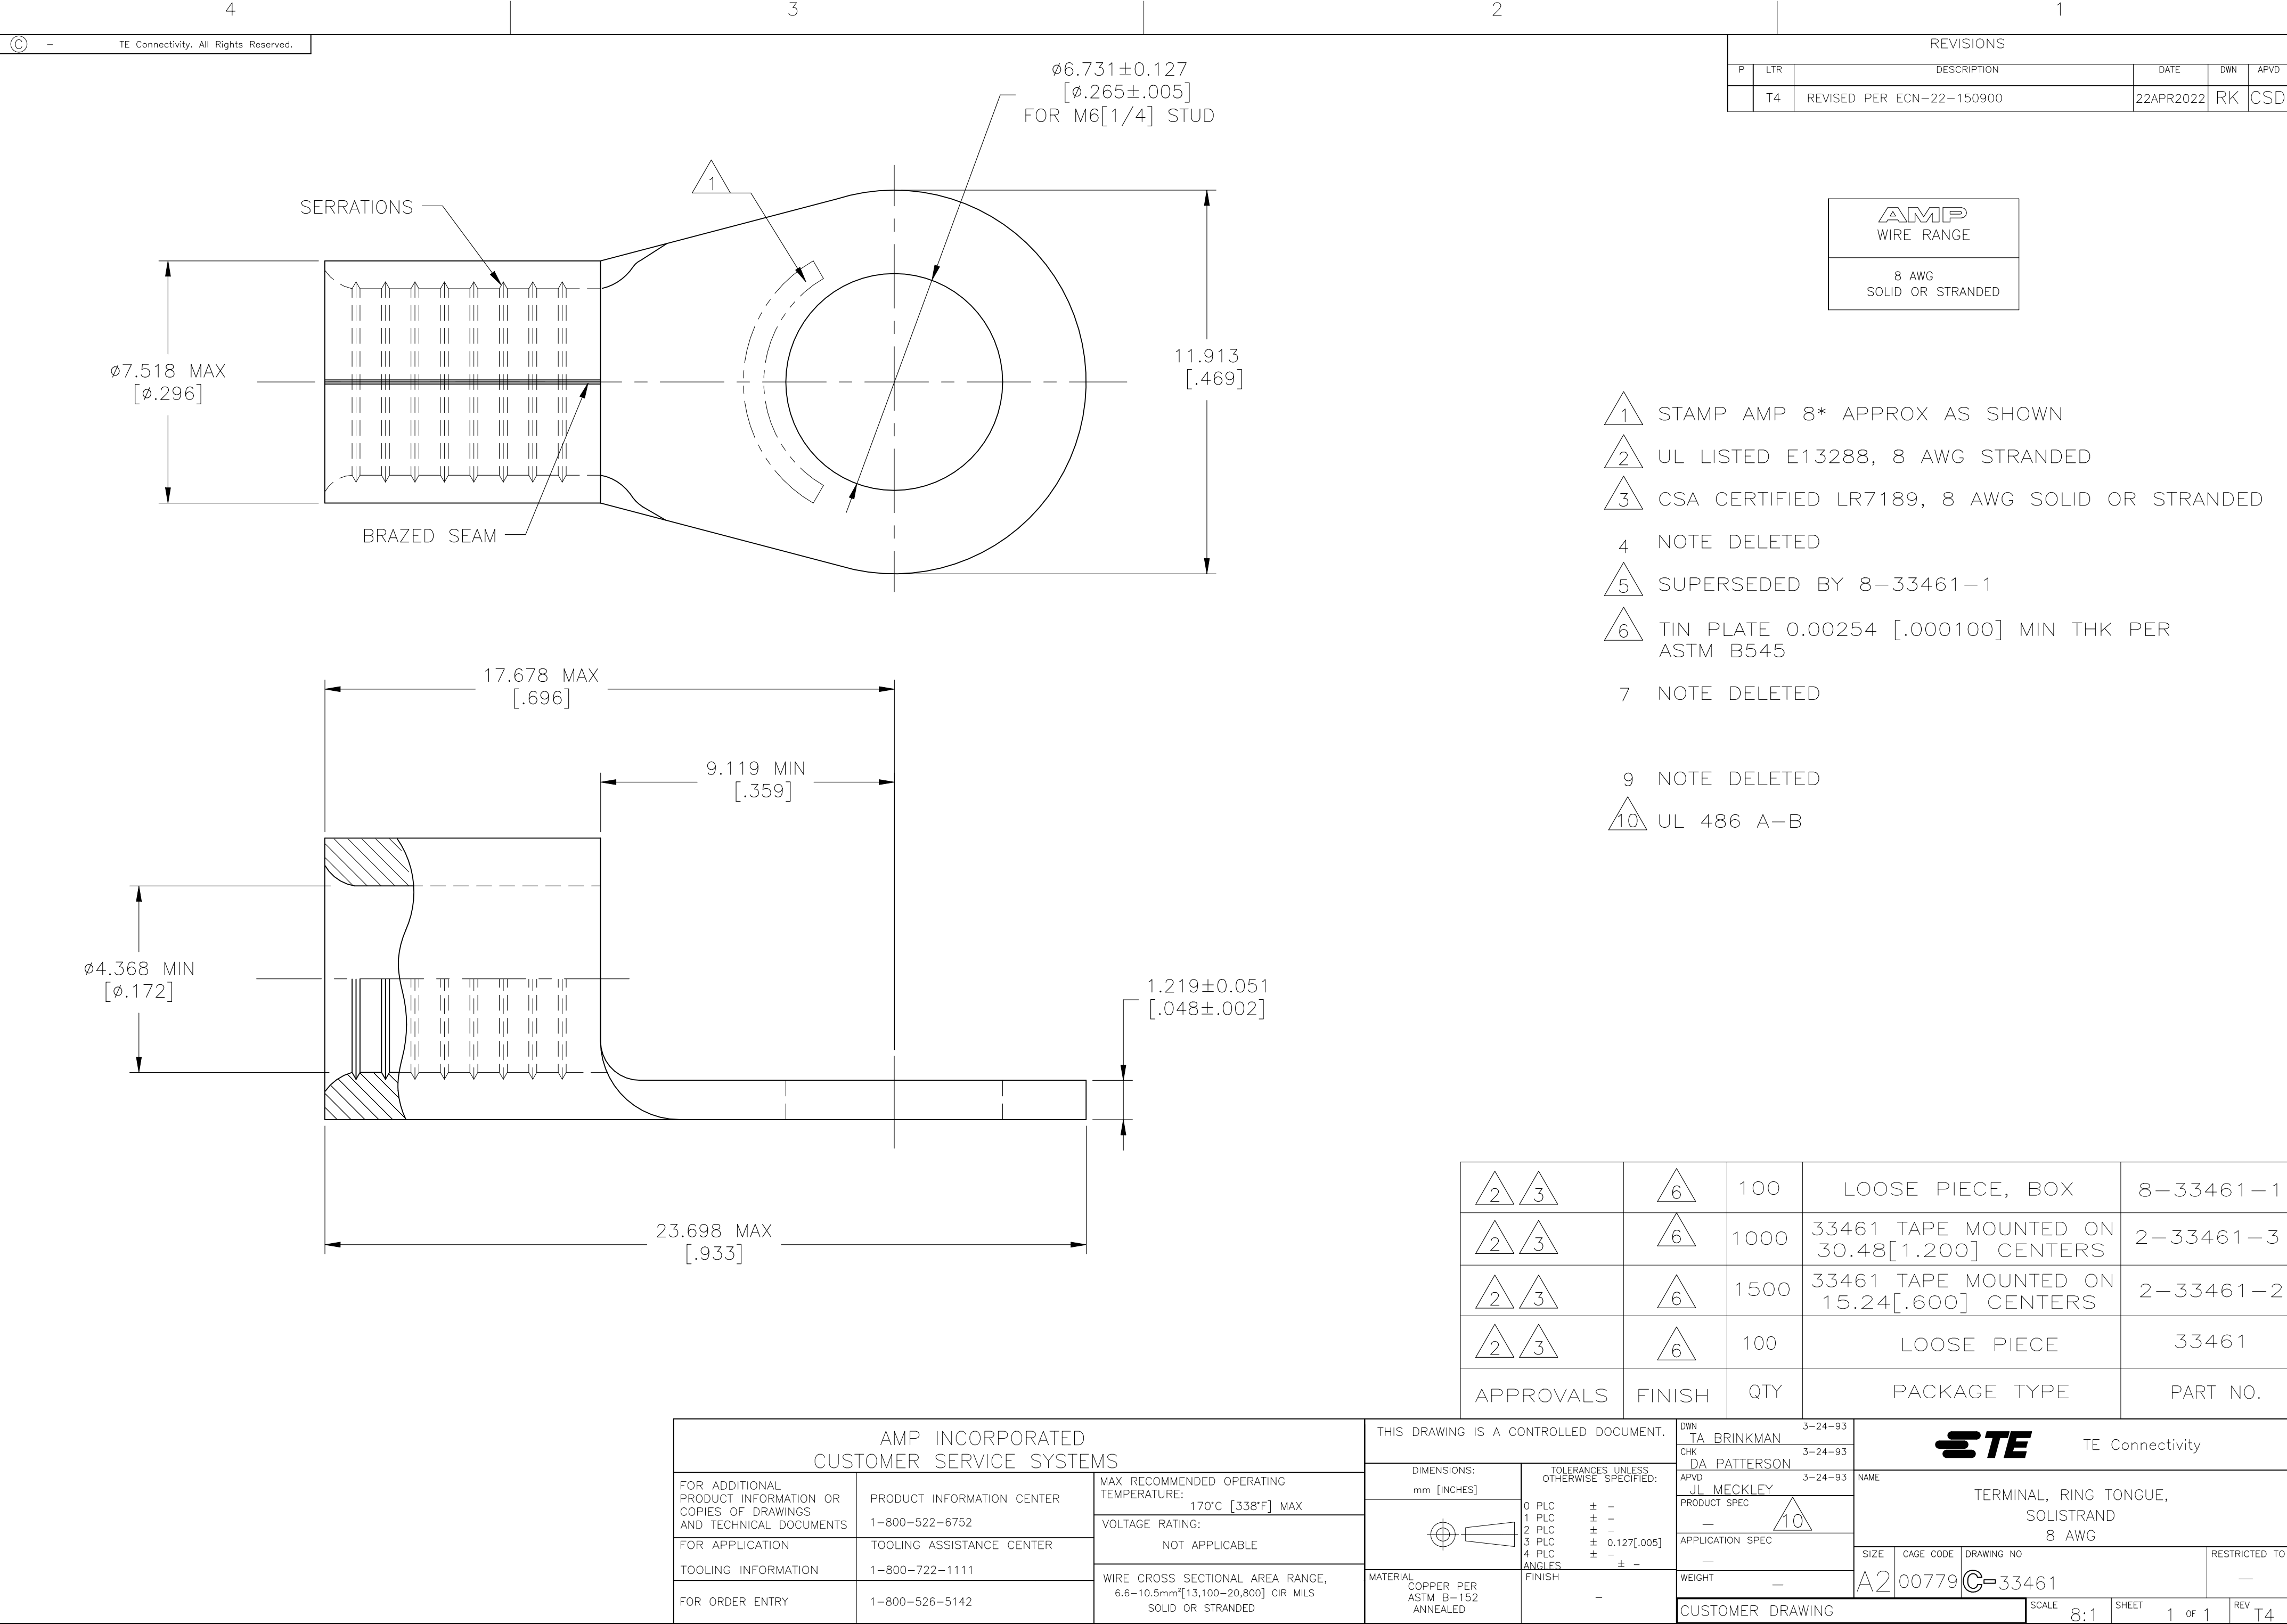

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	T4	REVISED PER ECN-22-150900	22APR2022	RK	CSD

AMP
WIRE RANGE

8 AWG
SOLID OR STRANDED

- 1 STAMP AMP 8* APPROX AS SHOWN
- 2 UL LISTED E13288, 8 AWG STRANDED
- 3 CSA CERTIFIED LR7189, 8 AWG SOLID OR STRANDED
- 4 NOTE DELETED
- 5 SUPERSEDED BY 8-33461-1
- 6 TIN PLATE 0.00254 [.000100] MIN THK PER ASTM B545
- 7 NOTE DELETED
- 9 NOTE DELETED
- 10 UL 486 A-B

 		100	LOOSE PIECE, BOX	8-33461-1
 		1000	33461 TAPE MOUNTED ON 30.48[1.200] CENTERS	2-33461-3
 		1500	33461 TAPE MOUNTED ON 15.24[.600] CENTERS	2-33461-2
 		100	LOOSE PIECE	33461
APPROVALS	FINISH	QTY	PACKAGE TYPE	PART NO.

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

TOOLING INFORMATION

1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C [338°F] MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE,
6.6-10.5mm²[13,100-20,800] CIR MILS
SOLID OR STRANDED

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.127[.005]
4 PLC ± -
ANGLES ± -
FINISH -

MATERIAL
COPPER PER
ASTM B-152
ANNEALED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN TA BRINKMAN 3-24-93
CHK DA PATTERSON 3-24-93
APVD JL MECKLEY 3-24-93
PRODUCT SPEC
APPLICATION SPEC
WEIGHT -
CUSTOMER DRAWING

TE Connectivity

NAME
TERMINAL, RING TONGUE,
SOLISTRAND
8 AWG

SIZE A2
CAGE CODE 00779
DRAWING NO C-33461
RESTRICTED TO -

SCALE 8:1
SHEET 1 OF 1
REV T4

1471-9 (1/15)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[33461](#)