




NUMBER 178305



METRIC

DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT

PRINT DIST

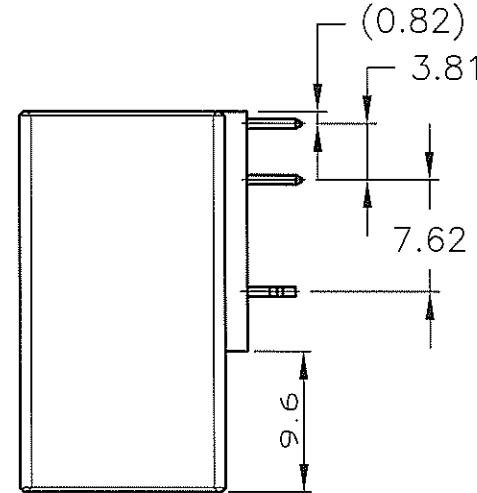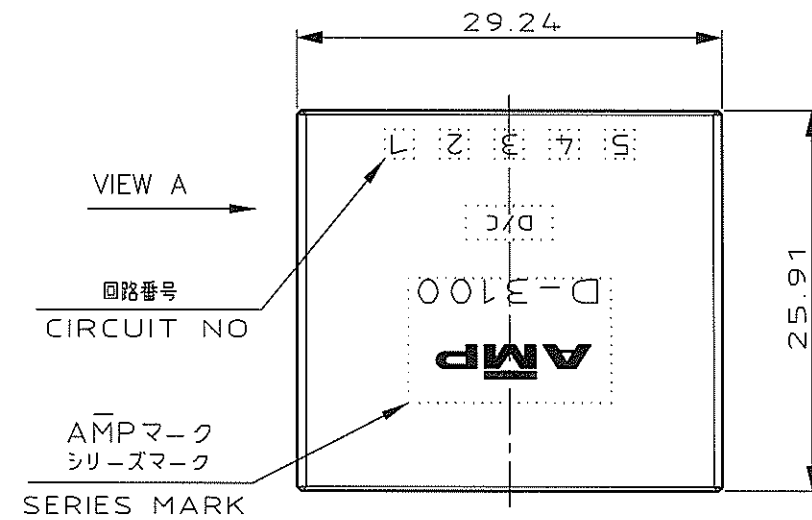


コネクタ外形
OUTLINE OF HEADER HOUSING

10- $\phi 1.1$
DIA 1.1 ± 0.1 10 PLACES

スルーホール 2- $\phi 3$
DIA 3 ± 0.1 2 PLACES

ラウンド 2- $\phi 4$ MIN
ROUND DIA 4 MIN 2 PLACES


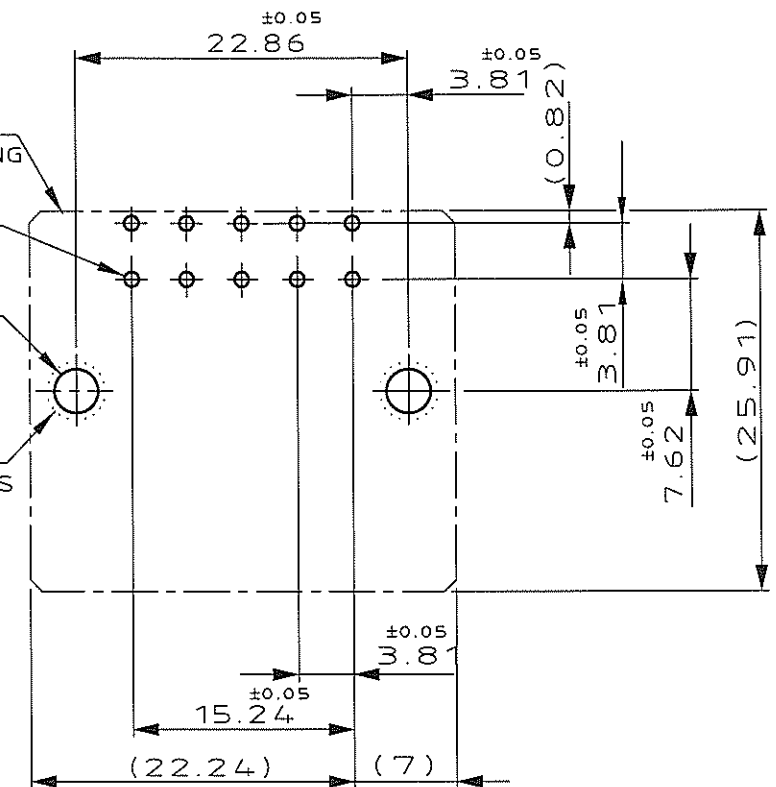


推奨基板取付け寸法

PC 基板厚: 1.6 ± 0.1
(非累積公差)
(コネクタ搭載面)

RECOMEND PC BOARD HOLE PATTERN

PC BOARD THICKNESS: 1.6 ± 0.1
(NOT ACCUMULATE TOLERANCE)
(CONNECTOR MOUNT SIDE)

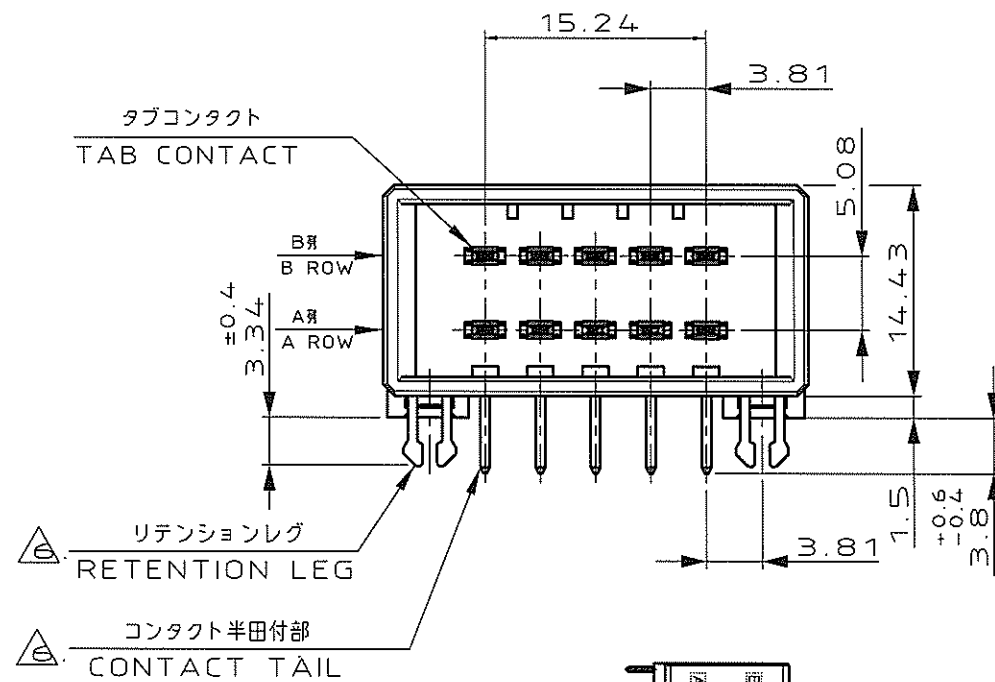

VIEW A
(SCALE: 1:1)

NOTES

1. MATERIAL: HOUSING: GLASS FILLED THERMO PLASTIC, POLYESTER
CONTACT: COPPER ALLOY
RETENTION LEG: COPPER ALLOY
2. FINISH (CONTACT AREA): $0.38 \mu\text{m}$ MIN GOLD PLATING OVER Ni PLATING
3. FINISH (CONTACT AREA): $0.76 \mu\text{m}$ MIN GOLD PLATING OVER Ni PLATING
4. FINISH (CONTACT AREA): $2.0 \mu\text{m}$ MIN TIN PLATED OVER NICKEL
5. FINISH (RETENTION LEG): TIN-LEAD PLATED (CONTACT TAIL) OVER NICKEL
6. FINISH (RETENTION LEG): TIN PLATED (CONTACT TAIL) OVER NICKEL

注記

1. 材料: ハウジング: ガラス入り熱可塑性ポリエステル樹脂
コンタクト: 銅合金
リテンションレグ: 銅合金
2. めっき: コンタクト: 全面Ni下地
接触部: $0.38 \mu\text{m}$ MIN金めっき
3. めっき: コンタクト: 全面Ni下地
接触部: $0.76 \mu\text{m}$ MIN金めっき
4. めっき: コンタクト: 全面Ni下地
接触部: $2.0 \mu\text{m}$ MINスズめっき
5. めっき: リテンションレグとコンタクト半田付部
ニッケル下地の上に半田めっき
6. めっき: リテンションレグとコンタクト半田付部: ニッケル下地の上にスズめっき

6	4	178305-5
5	3	178305-3
6	2	178305-2
(FINISH)		製品番号 (PART NO.)

C2	REVISED PER ECO-11-005030	RK	HMR	25APR11
LTR	REVISION RECORD	DR	CHK	DATE

WIRE RANGE		INSULATION DIA		NAME ダイナミック D3100 水平タイプ 10 極 ヘッダーアセンブリー	
MATERIAL SEE NOTE 注記参照		FINISH SEE NOTE 注記参照		10 POS DOUBLE ROW HORIZONTAL HDR ASS'Y FOR DYNAMIC 3100	
DR. 14 JUN 91 N. Matsubara		DE. 14 JUN 91 N. Matsubara		一般公差 (GENERAL TOLERANCE)	
CHK. 24/FEB/92 H. Oota		APP. 4/MAR/92 S. MANABE		10mm ±0.3 10mm 3mm ±0.4 30mm 10mm ±0.45 角 度 ±3°	
C2		REVISED PER ECO-11-005030		SIZE A3 LOC J NUMBER C-178305	
LTR		REVISION RECORD		SCALE 2-1 REV. C2 SHEET 1 OF 1	

(CUSTOMER DRAWING) 顧客用図面

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[178305-3](#)